

ALUMINUM LED T8 Lamps

Type A+B Ballast Compatible and Plug & Play

Features

- All ETL and DLC listed
- High lumen SMD2835 LED, LM-79 & LM-80 Tested
- <3% light decay after 9,000 hours of continuous light
- Operational with or without ballast
- Double ended power (A) or single ended power (B)
- Accessories clips for 8FT to prevent lamp hanging
- Energy saving and long life
- Perfect replacements for schools, supermarkets, warehouses, etc.
- 5 years warranty



Ordering Information / Example: [JA-4FT-10W-27K-C](#)

Product Series	Size	Wattage	Voltage	CCT	Lens
JA	4FT	10W	Blank (120-277VAC)	27K (2700K)	Blank (Frosted Lens) Standard C (Clear Lens)* <i>*Special Order</i>
		12W		30K (3000K)	
		15W		35K (3500K)	
		18W		40K (4000K)	
		20W		50K (5000K)	
	8FT	36W		60K (6000K)	



Accessory Clip Included for 8FT Lamps to prevent hanging

Electrical Data Table

Product Series	JA-4FT-T8-10W	JA-4FT-T8-12W	JA-4FT-T8-15W	JA-4FT-T8-18W	JA-4FT-T8-20W	JA-8FT-T8-36W
Nominal Wattage	10W	12W	15W	18W	20W	36W
Size	4FT					8FT
Average Lumen Efficacy	130 Lms/W					
Average Lumens	1300	1560	1950	2340	2600	4680
Packaging	50 pcs. / 40 lbs.					20 pcs. / 27.6 lbs.
Voltage	100-277VAC					
Base Type	G13					G13 / FA8 / R17D / (HO)
CRI	>80					
Power Factor	>0.95					
Construction	Aluminum Housing					
Certifications	ETL / DLC Listed					
Lifetime	>50,000 Hrs					
Warranty	5 years					



Miami, FL USA - info@jademar.com
 T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM




Information contained herein is subject to change without notice.
 Values are nominal.
 Revised 05/2021

Installation Instructions

1. Wiring Diagram for use with existing electronic fluorescent ballast. (Type A) (Please check our list of compatible electronic fluorescent ballast)

PLUG & PLAY INSTALLATION

1. Turn off power before installation.
2. Replace traditional fluorescent tube with LED tube.
3. Turn on power and check lamp function.

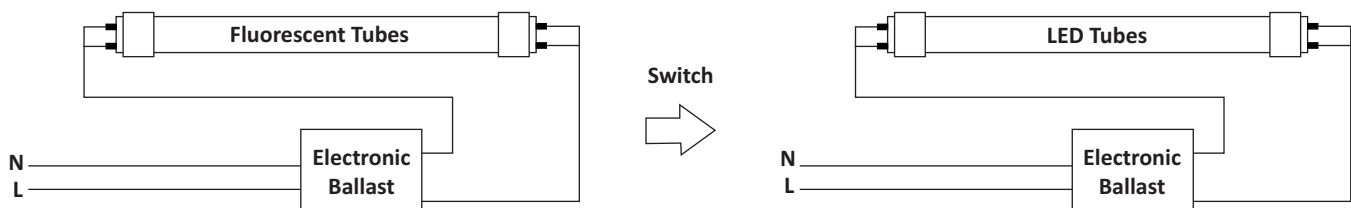

2. Wiring Diagram for bypassing existing electronic fluorescent ballast. (Type B - Single or Double Sided Power)



Installation with line voltage

