

ANT-6-Z10-BLE-SR | PIR IP65 Fixture Integrated High Bay Sensor + Zhaga Z10 Receptacle

12-24V 0-10V Fixture-integrated Bluetooth PIR Sensor



ANT-6-Z10-BLE-SR uses PIR Motion Detector Architecture and passive infrared (PIR) technology for improving detection coverage for high bay and low bay applications. It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dim levels and schedules can be set through Silvoir iOS app.

FEATURES & SPECIFICATIONS

Construction

- ANT-6-Z10-BLE-SR provides multi-level wireless lighting control based on motion and daylight.
- Constructed of white/black PC.
- PIR motion sensor can be configured as an occupancy or occupancy and daylight sensor.

Electrical

- ANT-6-Z10-BLE-SR utilizes a Bluetooth® Low Energy (BLE) mesh network. Dim levels and schedules can be set through Silvoir iOS app.
- 360 degree PIR motion sensor can be configured as an occupancy sensor. Occupancy sensor turns lights on automatically when motion is detected and turns lights off automatically after the area is vacated.
- Programmable settings include time

delays and brightness and can be set through Silvoir iOS app.

- Features such as parameter profiles, manual dim control, and real-time feedback from the sensor can speed up configuration and provide custom user control.
- Max Bluetooth® range is 200'(60m) line of sight and highly dependent on the integration of fixtures, surrounding environment. It is recommended to conduct testing for range accuracy.
- Input Voltage | Current Consumption: 12-24 VDC | 50 mA.

Installation

- Z10 design, Low Voltage Connector, match with TE 2343403-1.
- PIR detection is 360° coverage pattern and is best suited for areas with a clear line of sight and good air circulation.

- Operating temperature range of -20°C to + 60°C.

- Max mounting Height: 40ft(12m).

- Available with Magnetic reset (Touch the top part of sensor for 5 seconds).

Installation

- 5-years limited warranty.

Listings


- FCC
- UL
- DLC
- Bluetooth®
- Declaration ID: D062134

ORDERING GUIDE


Description	Part Number
12-24V 0-10V Fixture-Integrated Bluetooth PIR Sensor	ANT-6-Z10-BLE-SR



DIMENSIONS AND APPEARANCE

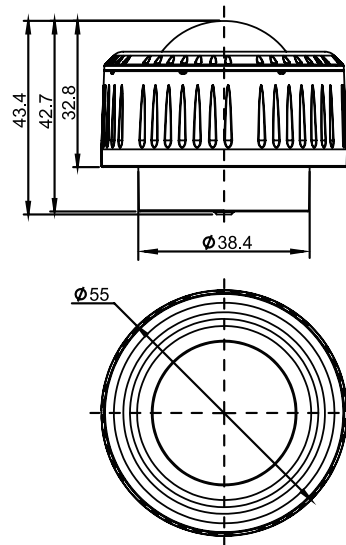

SENSOR COVERAGE

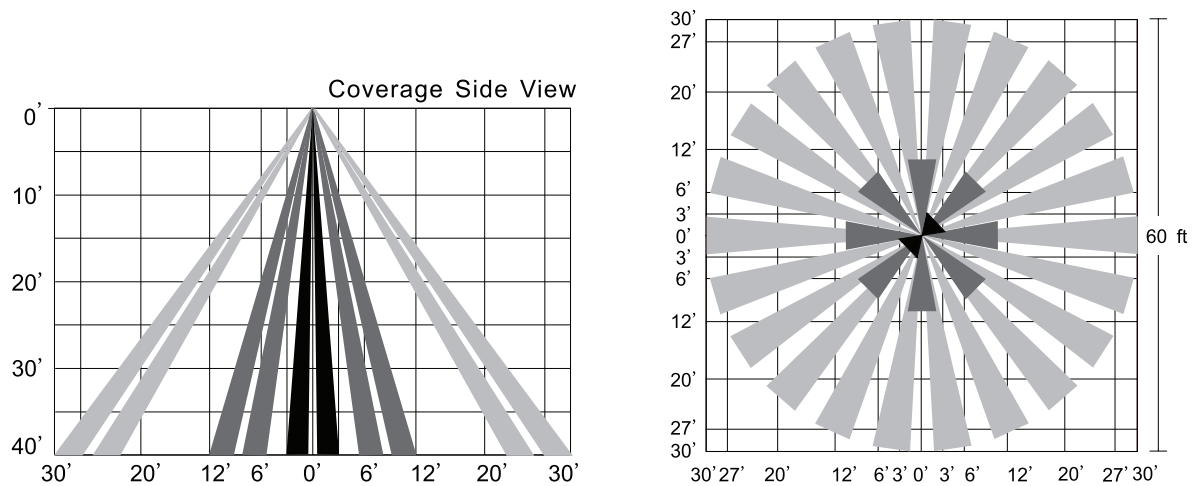

WIRING DIAGRAM

- Port 1 : 12-24Vdc
- Port 2 : GND/DIM -
- Port 3 : DIM +
- Port 4 : NC

