



## JRV SERIES RINGED VANITY LUMINAIRE

### PRODUCT DESCRIPTION

The JRV Series of vanity tiered contemporary framed wall mounted vanity fixture and is available in different finish options, satin nickel or oil rubbed bronze. Updated with the latest in LED technology and driver on board version is an elegant lighting solution that can function in various applications including corridors and restrooms. Fixture mounts to standard junction box (not included). The long LED life coupled with exceptional color rendering make this fixture attractive for new or retrofit projects.

### STANDARD FEATURES

#### Construction and Materials

- Acrylic Lens and Satin Nickel Rings
- Wall or Ceiling Mount

#### Optical System

- 120° Light Distribution

#### Electrical System

- Input Power: 18W / 27W / 36W
- Input Voltage: 120VAC
- Efficacy: 98 lm/W
- Power Factor: >0.9
- CR: >80 and >90
- Operating Temp: -14°F to 113°F (-10°C to 45°C)
- Total Harmonic Distortion: <20%
- Integral Surge Protection: L/N-PE: 2kV, L-N: 2kV


#### Dimming and Controls

- 0-10V Continuous Dimming Standard

#### Certifications and Compliance

- ETL Listed
- Suitable for Damp Locations
- RoHS compliant
- Meets FCC Part 15, Subpart B, Class A limits for conducted and radiated Emissions
- **Lifetime Based on TM21:** L70 ≥ 100,000 Hrs


### PRODUCT DIMENSIONS

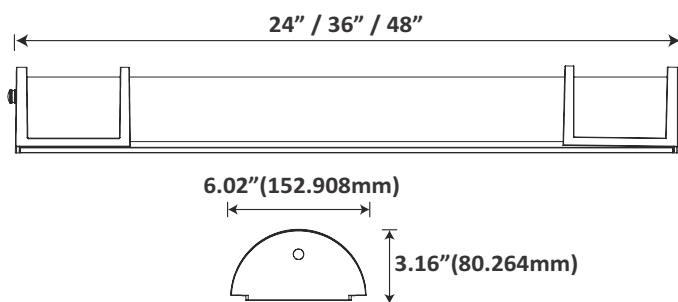

### PERFORMANCE SUMMARY

<b>Input Power</b>	18W / 27W / 36W
<b>Max Dimensions</b>	24" / 36" / 48"
<b>Efficacy</b>	98 lm/W
<b>CRI</b>	80 CRI Standard or 90 CRI Optional
<b>CCT</b>	3000K / 3500K / 4000K / 5000K
<b>Input Voltage</b>	120VAC
<b>Dimming &amp; Control</b>	0-10V Continuous Dimming Standard on 18W Only
<b>Protection</b>	Damp Locations
<b>Mounting</b>	Wall or Ceiling Mount
<b>Lifetime Based on TM21</b>	L70 ≥ 100,000
<b>Limited Warranty</b>	10 Years

### PRODUCT BREAKDOWN

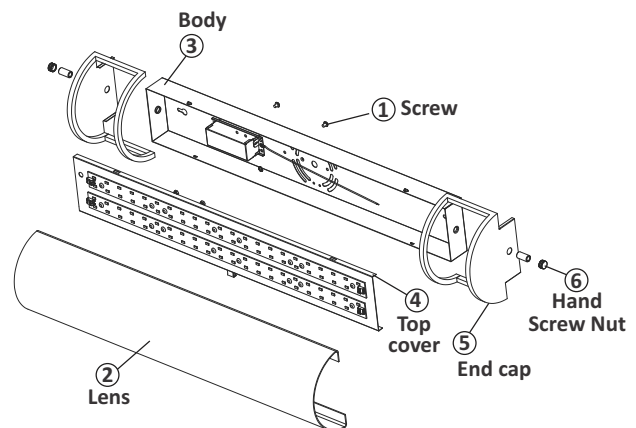

## SPECIFICATION SUBMITTAL DETAIL

Project Name/Type:		Date:
Catalog/Part #:		

### JRV RINGED VANITY LUMINAIRE SERIES

Ordering Information Example: **JRV-24-18W-35K-120-D-SN**

Product Series	Size	Wattage	CCT	Input Voltage	CRI	Dimming	Finish
JRV	24 (24 inch)	18W	30K (3000K) 35K (3500K)	120 (120VAC) Standard	Blank (80 CRI) Standard 90 (90 CRI) Optional	D (0-10V Dimming) Standard	SN (Satin Nickel Rings)
	36 (36 inch)	27W	40K (4000K)				
	48 (48 inch)	36W	50K (5000K)				

### LUMEN PERFORMANCE AND ELECTRICAL DATA

Model Number	JRV-24-18W	JRV-36-27W	JRV-48-36W
Maximum Dimensions	24"L x 6.02"W x 3.16"H	36"L x 6.02"W x 3.16"H	48"L x 6.02"W x 3.16"H
Input Power	18W	24W	36W
Efficacy (lm/W)	95	95	95
Initial Lumens (lm)	1,700	2,560	3,420
CRI	90	80	80
CCT	3000K / 3500K / 4000K / 5000K		
Input Voltage	120VAC		
THD @ 120VAC	≤20%		
Power Factor	>0.90		
Ingress Protection	Damp Locations		
Integral Surge Protection	L/N-PE: 2kV, L-N: 2kV		
Maximum Weight	1.88 LBS.	0.85 LBS.	1.02 LBS.
Certifications & Compliance	ETL Listed / FCC / RoHS		
Standard Control Specification	0-10V Dimming Standard on the 24" 18W only		
Construction	Metal Mounting Place / Acrylic Lens / Satin Nickel Rings		
Light Distribution	120° Standard		
Working Temp	-30°C to +45°C (-22°F ~ +113°F)		
Lifetime Based on TM21	L70 ≥ 100,000 Hrs		
Limited Warranty	10 Yrs.		

