

JRV Ringed Vanity Luminaire Series

Product Description

JRV is ringed vanity fixture and is available in different finish options, satin nickel or oil rubbed bronze. Updated with the latest in LED technology and driver on board version is an elegant lighting solution that can be used in various applications including corridors and restrooms.

Fixture mounts to standard junction box (not included). The long LED life coupled with exceptional color rendering make this fixture attractive for new or retrofit projects.

Product Features



- ETL
- 24", 36", 48"
- 30K, 35K, 40K, 50K
- 18W, 27W, 36W
- 1700L, 2560L, 3420L
- Satin Nickel
- High-transmission white plastic lens with excellent distribution and uniformity
- Direct replacement for fluorescent
- Can be wall or ceiling mounted
- Ringed end cap can be steel or plastic with satin nickel finish
- 5 years warranty

Applications

- Homes
- Corridors
- Bathrooms & Restrooms

Performance Summary

Size	24" x 6.02" x 3.16", 36" x 6.02" x 3.16", 48" x 6.02" x 3.16"
Input Power	18W, 27W, 36W
Efficacy	94.8 Lm/W Min. - 97.8 Lm/W Max.
CCT	3000K / 3500K / 4000K / 5000K
Dimming	Triac Dimming; Non-Dimming
CRI	80 & 90
Input Voltage	120-277V
Lifetime Based on TM21	L70 @ >100,000 Hrs
Warranty	5 Year Limited

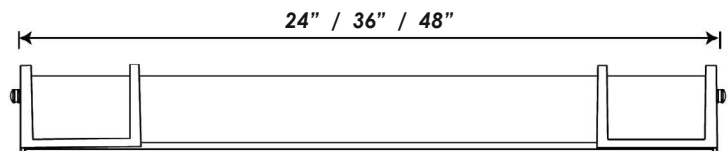

SPECIFICATION SUBMITTAL DETAIL		
Project Name/Type:		Date:
Catalog/Part #:		

JRV Ringed Vanity Luminaire

ORDERING INFORMATION / Example: **JRV-36-27W-940-MV-Satin**

Product Series	Sizes	Wattage	CRI & CCT	Voltage	Housing Color
JRV	24 (24 inch)	18W	830 - Ra 80, 3000K 835 - Ra 80, 3500K 840 - Ra 80, 4000K	120D (120V Dimmable) MV (120-277V)	Satin (Satin Nickel Base)
	36 (36 inch)	27W	850 - Ra 80, 5000K 930 - Ra 90, 3000K 935 - Ra 90, 3500K		
	48 (48 inch)	36W	940 - Ra 90, 4000K 950 - Ra 90, 5000K		


Data Table

Product Number	JRV-18W	JRV-27W	JRV-36W
Product Dimensions (L x W x H)	7.44" x 3.94" x 12.25"		
Nominal watts	18W	27W	36W
Nominal Efficacy	97.8 Lm/W	94.8 Lm/W	97.8 Lm/W
Lumen Output @3000K	XXXX	XXXX	XXXX
Lumen Output @ 3500K	XXXX	XXXX	XXXX
Lumen Output @ 4000K	XXXX	XXXX	XXXX
Lumen Output @ 5000K	XXXX	XXXX	XXXX
Input Voltage	120V	120V	120-277VAC
CRI	90	80	80
THD @ 120VAC	XXX	XXX	XXX
Power Factor	>0.9	>0.9	>0.9
CCT	3000K / 3500K / 4000K / 5000K		
Dimming	Triac Dimming	Non-Dimming	Non-Dimming
Power Supply	XXXXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXXXX
Construction	Plastic diffuser on metal base		
Beam Angle / Field Angle	120°	120°	120°
Lifetime based on TM21	L70 @ >100,000 Hrs		
Ambient Working Temp	-10°C to +45°C (+14°F ~ +113°F) Ambient		
Certifications	ETL, JA8, RoHS		
Total Weight	3.30 LBS	5.84 LBS	5.95 LBS
Limited Warranty	5 Years		





Photometric Detail

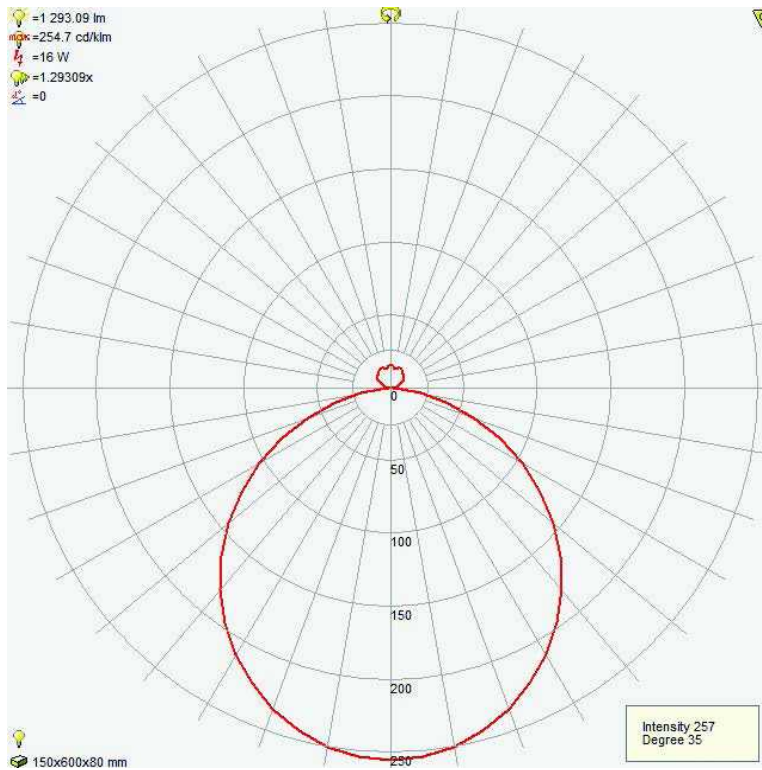

Installation

