

ANT-5-Z10-FC/CON-BLE-CB | CASAMBI Fixture Controller - Side Mount - 12VDC**SPECIFICATION**

ANT-11-CON-BLE-CB allows for 0-10v dimming, and is made to into a bluetooth mesh system.

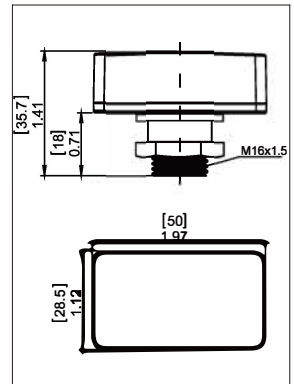
It utilizes a Bluetooth® low energy (BLE) mesh network. Dim levels and schedules can be set through silvair iOS app.

**OVERVIEW**

- Bluetooth® SIG mesh.
- High-End Trim, Zoning, Continuous Bi-level Dimming.
- LED Motion indicator.
- This device can be powered by 12V auxiliary power from dim-to-off LED driver for ease of setup and operation.
- It is suitable for a variety of indoor and outdoor applications. It comes with Low voltage Connector, and is IP 65 rated.
- Technology Partner SILVAIR.

FEATURES AND BENEFITS

- Bluetooth to 0-10V signal converter, Bluetooth® mesh network.
- Built-in 20mA 0-10V signal output.
- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices.
- All devices on 0-10V line are broadcast controlled by mobile application.
- In typical outdoor environment, the typical range for wireless communication is 60m.
- Actual range is dependent on field installation.
- Available with Magnetic reset (Touch the top part of sensor for 5 seconds).
- On-board antenna.

**TECHNICAL DATA**

Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	40ft(12m) Max.
Operating temperature	-40°F~+158°F (-40°C+70°C)
IP rating	65
Wireless Standards	5.0 Bluetooth Mesh
Max Bluetooth Range	200ft
Warranty	5years

ORDERING INFORMATION: ANT-11-CON-BLE-CB 0-10V Wireless Fixture Controller