

PSC-BL-D-CM-DC0-BLE-CB | Ceiling Mounted Dual Technology Wireless Sensor

Overview

- Dual Tech Sensor with Passive Infrared (PIR) & Ultrasonic Detection
- Occupancy or Vacancy Operation Modes
- Compatible with Bluetooth® SIG Mesh Systems
- Surface Mount to Electrical Enclosure
- Features High and Low-End Trim Adjustment, Zoning & Continuous Dimming
- Suited for Mounting up to 12ft (3.7m)
- 12 to 24VDC Powered
- Conforms with DLC NLC5 Cybersecurity Standards



Applications

PSC-BL-D-CM-DC0-BLE-CB Sensor uses both PIR and ultrasonic detection methods to provide improved performance in areas where a PIR sensor alone will not suffice. This device communicates wirelessly via Bluetooth Mesh technology allowing for wireless control of luminaires.

The sensor is suitable for a variety of indoor applications and mounts to a standard electrical junction box or enclosure.

Wireless Control Operation

CASAMBI™ Mesh Controls: Qualified for Bluetooth Mesh 1.0.1 (SIG), the unit can pair with an iOS application to allow initial setup and subsequent adjustments. End users can program dimming levels and group multiple controllers into a Bluetooth® Mesh system for simultaneous wireless lighting control.

See CASAMBI™ Commissioning User Manual for more info.

Summary

Product Type:
Dual Tech (PIR & Ultrasonic) Occupancy/
Vacancy Sensor

Input Voltage: 12 to 24 VDC

Current Consumption:
50 mA (25 mA non-BLE) @ 12VDC
30 mA (20 mA non-BLE) @ 24VDC

Mounting:
Ceiling mount up to 12 ft (3.7m)

PIR Sensor Range:
1600 ft² (150 m²)

Ultrasonic Sensor Range:
900 ft² (85 m²)

Max Bluetooth Range¹:
100 ft (30.4m)

Operating Temperature:
-30° C to 70°C

Storage Temperature:
-40° C to 80°C

Relative Humidity:
90-95% non-condensing

Color: White

Warranty: 5 years

1. Bluetooth Range is highly dependent on the integration of fixtures, surrounding environment and conditions. It is recommended to conduct testing for Bluetooth range accuracy.

Accessories


Power Pack: This sensor operates on 12-24VDC input power and requires a separate mwConnect power pack. See the mwConnect line of Power Packs and Power Supplies.

Project


Location/Type




Physical Dimensions

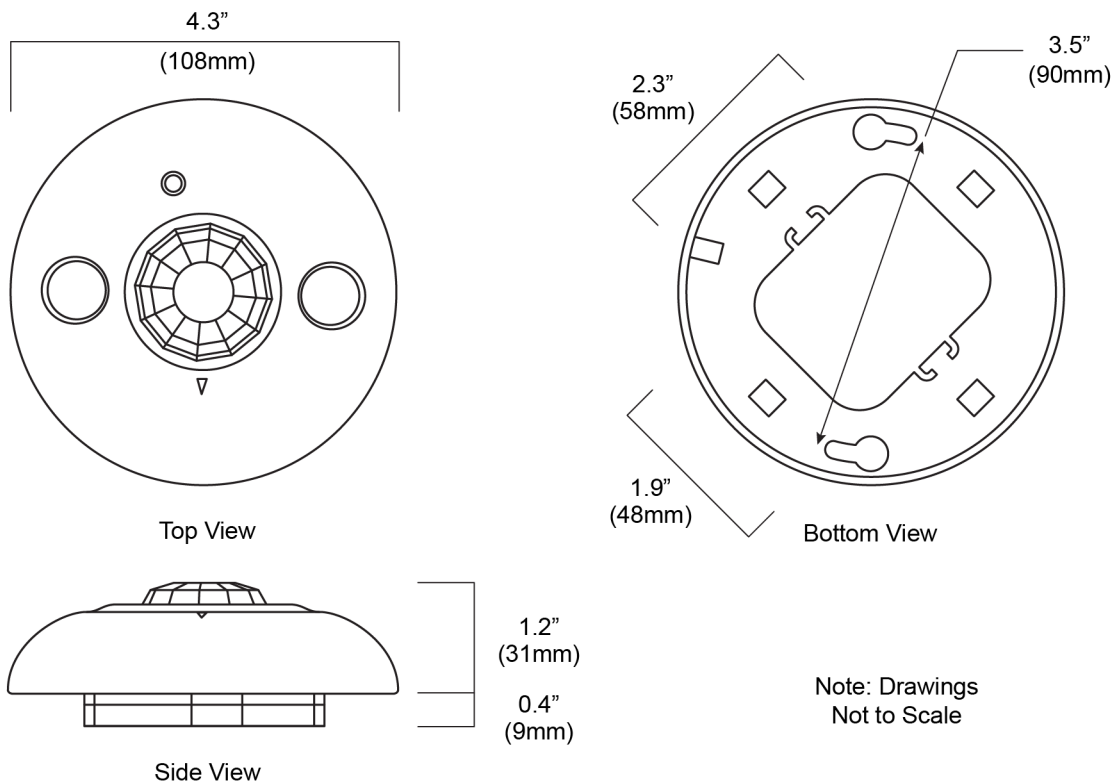

Coverage Area

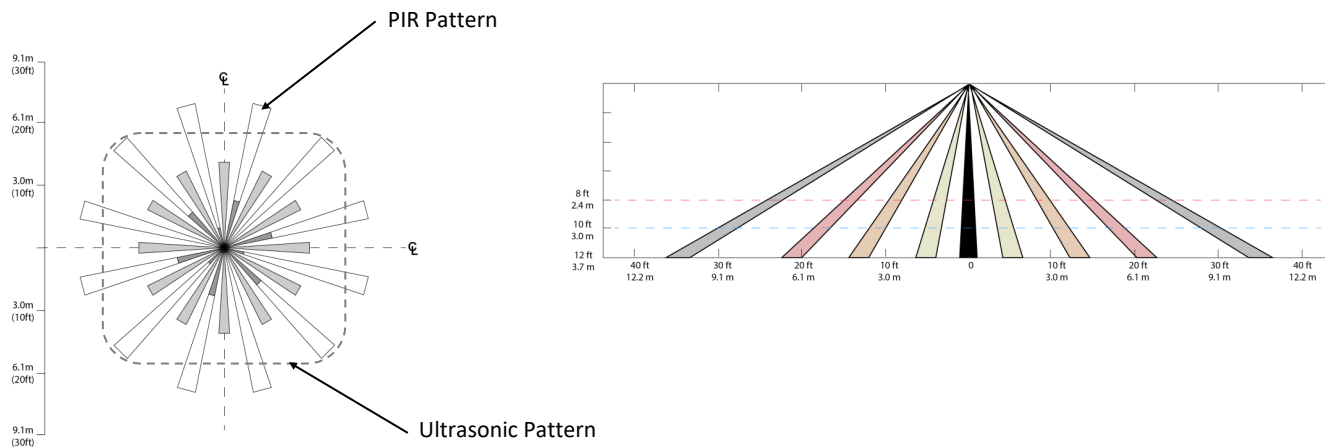

Example Application: Wireless Sensor with Power Supply

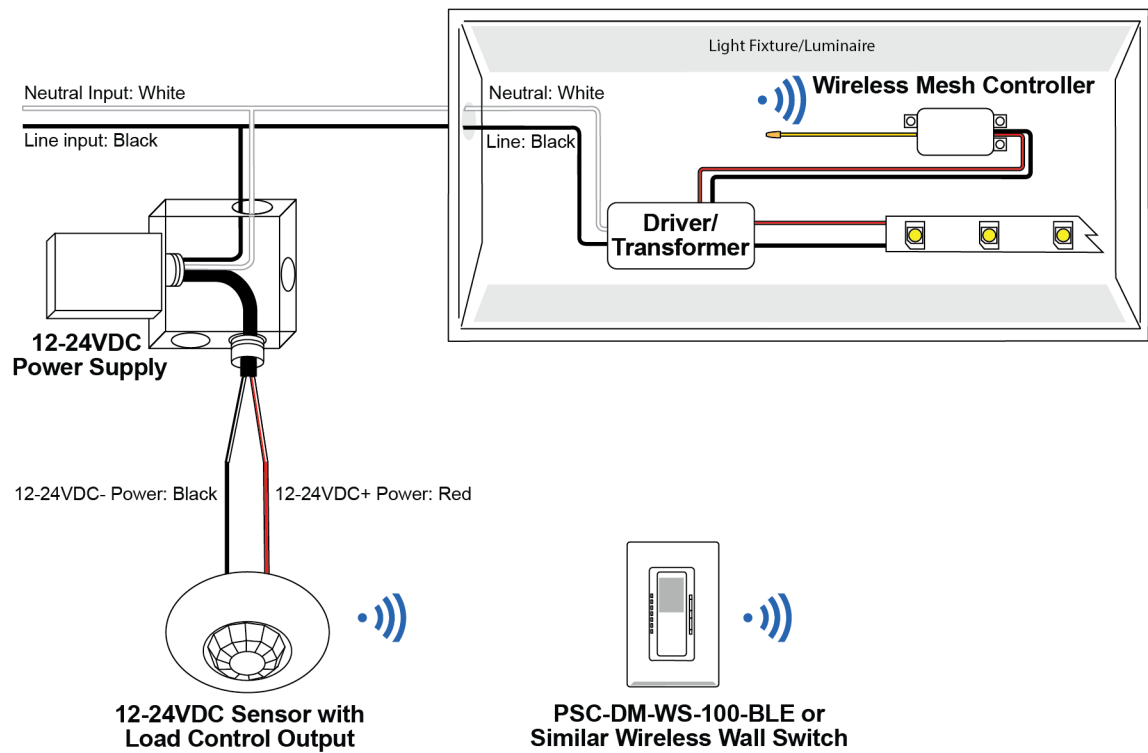


Powering Multiple Sensors

Power Supply	Power Rating	Number of Wireless Sensors (BLE Model)	Number of Sensors
PSC-AC-PP-100	24VDC, 150mA	5 Sensors Max	7 Sensors Max
PSC-WCM-450-BLE-XX	12VDC, 300mA	6 Sensors Max	12 Sensors Max



Example Application: Sensor Installed with Wireless Area Controller and 0-10V Driver

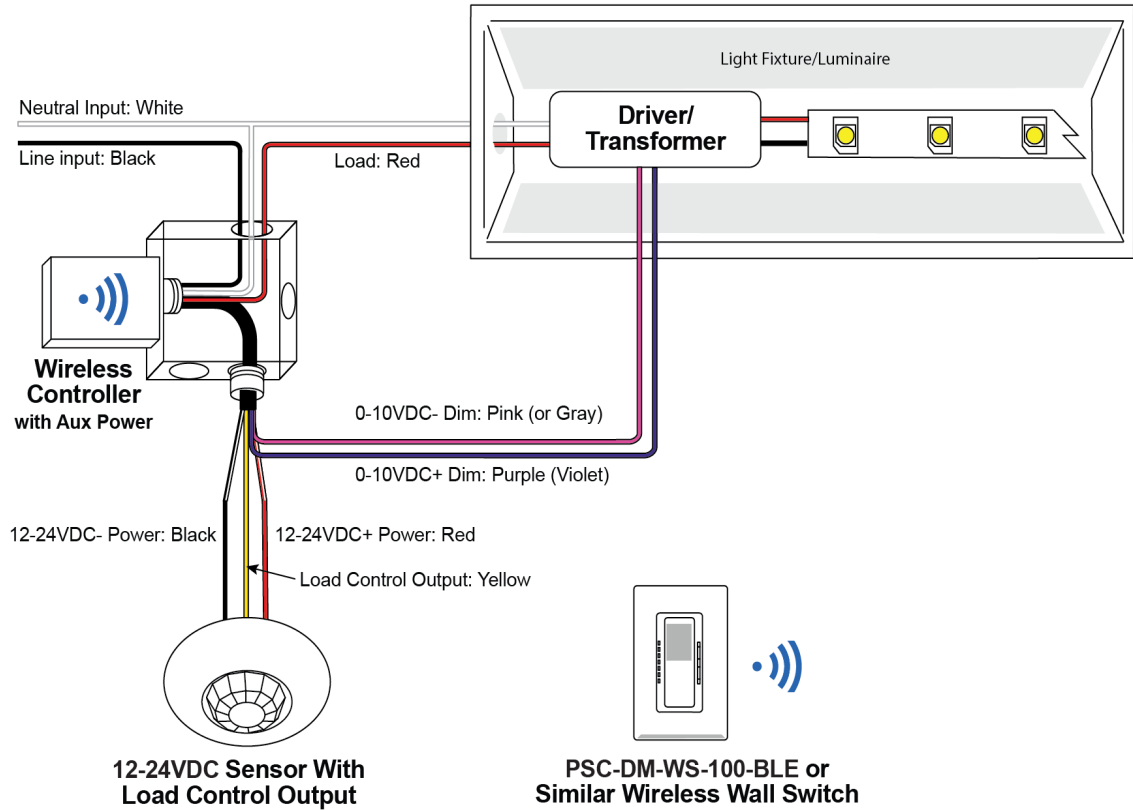

Wiring

Wire	Designation	Notes
Red	12-24VDC+ Power Input	Sensor Power Input
Black	Power Input Common	Sensor Power Input
Yellow	10-22VDC Control Output	Output for Controlling Power Pack or Similar Devices (Active High)

How to Order

Model No.	Description	Input Voltage
PSC-BL-D-CM-DC0-BLE-CB	Wireless Low Voltage Ceiling Mount Dual Tech Occupancy Sensor, TruBlu Wireless Mesh	12-24VDC
PSC-BL-D-CM-DC0	Low Voltage Ceiling Mount Dual Tech Occupancy Sensor, non-Wireless	12-24VDC