

LED THERMOPLASTIC EMERGENCY UNIT WITH ADJUSTABLE OPTICS



Illumination

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0 watt (8 LEDs x 0.125 watt) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Two adjustable LED lamp heads provide optimal center-to-center spacing

Electrical

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical
- Suitable for wall or ceiling mount
- Knockout for conduit applications.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.


Options

- SPV: UL Listed for 208/220/240 Volt, 50/60Hz

Warranty and Listings

- Five year warranty on all electronics and housing. Batteries prorated for five years.
- UL (standard)/CSA (optional) listed for damp locations (0°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Product Dimensions

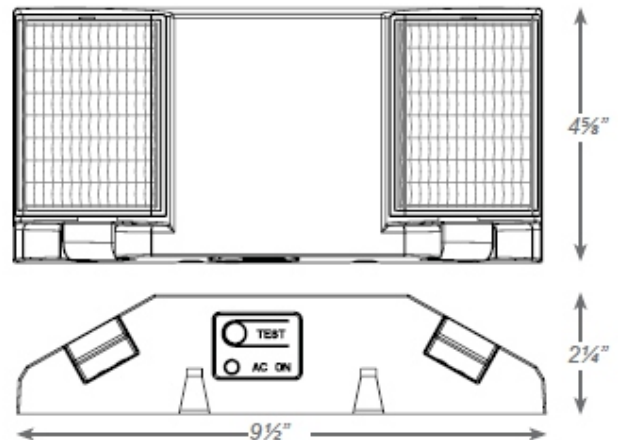

ORDERING INFORMATION

| Product Series | Housing Color | Options |
|----------------|-----------------------------|--------------------|
| JEM-AO | Blank (White) BK (Black) | SPV (208/220/240V) |



Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Values are nominal. All values conform to DLC tolerances.
Revised 05/2019