

BC-USDM101-3-SR | Wall Switch - 2 BUTTON DIMMER



120V Wireless 2-Button Dimmer Wall Switch



BC-USDM101-3-SR Bluetooth mesh dimmers provide automatic lighting control for a variety of indoor applications. They can replace any standard single-pole wall switch. 2-Button can be used for On/Off, and dimming controls. The configurations of each button can be personalized at the field. Typical applications include public restrooms, private offices, classrooms, conference rooms, storage spaces, and break rooms.

FEATURES & SPECIFICATIONS

Basic Features

- Bluetooth® SIG mesh
- Manual on/off (wireless)
- Dim up/down (wireless)
- LED status indicator light
- Mounts in any standard wall box
- Color: white
- Technology Partner SILVAIR

Summary

- Product Type: Dimmer Wall Switch
- Input Voltage | Power Consumption: 120VAC , 60Hz | Max 1.0W
- Mounting: Standard wall box
- Max Bluetooth Range: 200'(60m)

- Operating temperature: 0° to 55°C
- Storage Temperature: -10° to 60°C
- Relative Humidity: 90-95% non-condensing at 30°C
- 5-years limited warranty

Listings

- FCC
- ETL
- DLC
- Bluetooth®
- Declaration ID: D062134

Note:


1. Bluetooth Range is highly dependent on the integration of fixtures, surrounding environment and conditions. It is recommended to conduct testing for range accuracy.

ORDERING GUIDE

Description	Part Number
120VAC Wireless 2-Button Dimmer Wall Switch, Bluetooth Mesh in Silvair	BC-USDM101-3-SR




PRODUCT OUTLINE

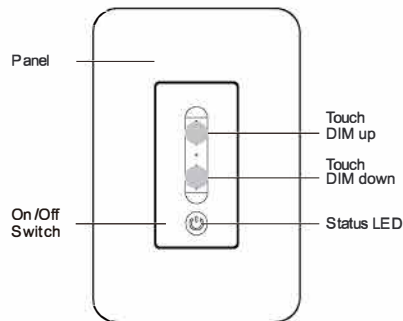


RESET

Press and hold Switch button and "DIM up" for 5s to reset the Dimmer and get into quick configure mode.

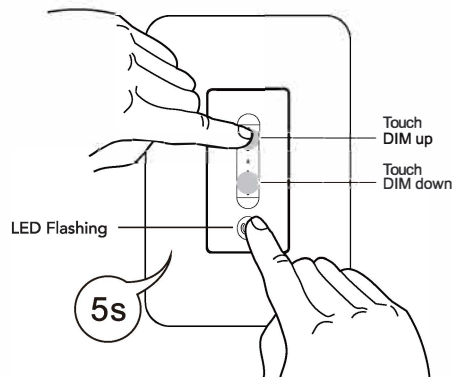

DIMENSIONS AND APPEARANCE

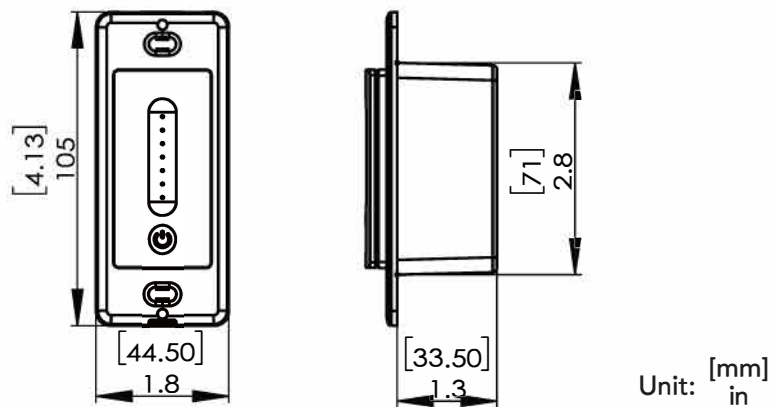

WIRING DIAGRAM

