

LED COMPACT WET LOCATION POLYCARBONATE EXIT SIGN



Illumination

- Ultra bright, energy efficient, long life Red or Green LEDs.

Electrical

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery. (EM Models Only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED adjustable optics for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

Mounting

- Polycarbonate mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


Warranty and Listings

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

Housing

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

Product Dimensions

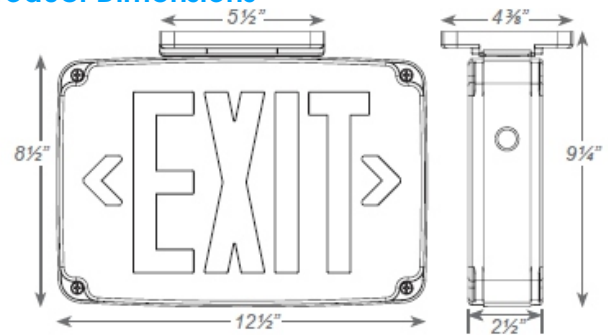

ORDERING INFORMATION

| Product Series | No of Faces | Letter Color | Housing Color | Battery | Options |
|----------------|--------------------------------------|----------------------|---------------------------------------|--|---|
| JES-WP | SF (Single Face) DF (Double Face) | R (Red) G (Green) | WH (White) BK (Black) GR (Gray) | Blank (AC Only) EM (Battery Backup Cold Weather Standard) | SDT (Self Diagnostics) 2C (Dual Circuit Operation) TP (Tamper-Proof) Custom (Custom Wording) |



Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Values are nominal. All values conform to DLC tolerances.
Revised 01/2021