


LED EXIT & EMERGENCY COMBINATION UNIT WITH LIGHT GUIDE

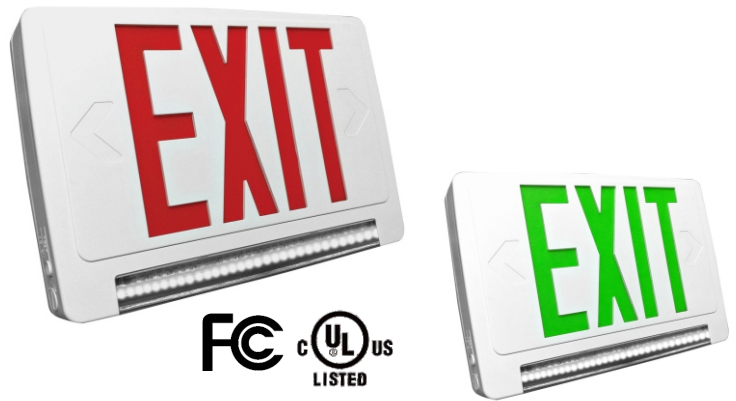

Illumination

- Ultra bright, energy efficient white LED emergency lighting.
- 4.5 watt (36 LEDs x 0.125 watts) per light pipe.
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized adjustable optic lens for optimal light distribution.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED adjustable optics for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes.
- EZ snap-out Chevron directional indicators.


Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- Custom: Signs available with requested "special" wording.

Warranty and Listings

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

Product Dimensions

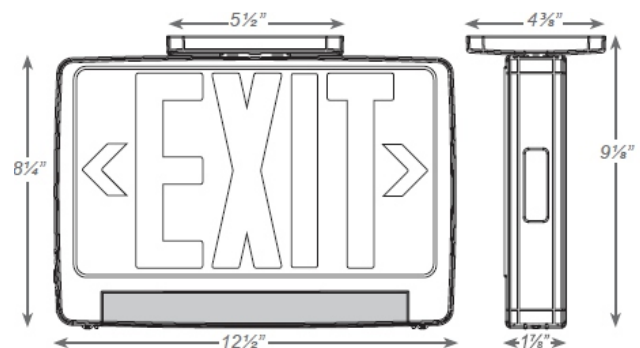

ORDERING INFORMATION

Product Series	No of Faces	Letter Color	Housing Color	Other Options	
JESC-LG	SF (Single Face) DF (Double Face)	R (Red) G (Green)	WH (White) BK (Black)	RC (Remote Capable) HL (High Lumen)	SDT (Self Diagnostic) CST (Custom Wording)



Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Revised 01/2021