

JWA-CPS WRAPAROUND LUMINAIRE

INSTALLATION REQUIREMENTS



WARNING: Risk of electric shock and serious injury. SHUT OFF BREAKER AT PANEL BEFORE INSTALLING.

WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.


CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handing fixture.

NOTICE:


- Green ground screw provided in proper location. Do not relocate.
- Minimum 90° supply conductors.
- Specifications and dimensions subject to change without notice.
- Suitable for Dry or Damp location.

GENERAL WIRING DIAGRAM

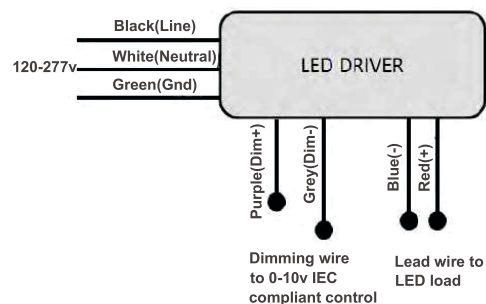


1.0 INSTALLATION STEPS - SURFACE MOUNTING

- Remove product from packaging.
- Remove lens by pulling from one side of the fixture and hinge on the other for mounting, using the provided mounting holes on each end of the fixture housing.
- Make electrical connections according to code.
- Install channel cover.
- Install lens on one side of the fixture and rotate to engage the opposite side.

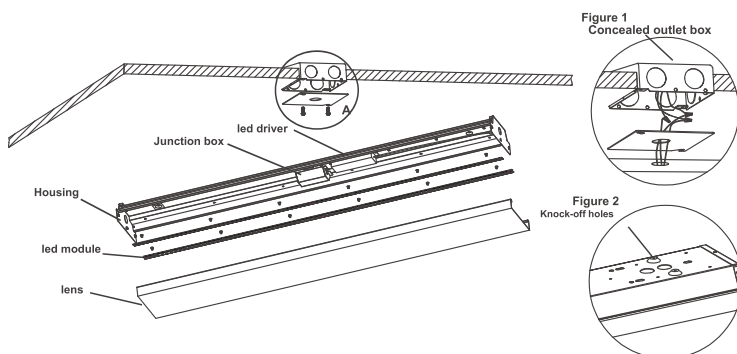


1.1 INSTALLATION STEPS - CHAIN KIT

- Mount cable to the luminaire. Twine the one end of cable to the beam, then insert into the clasp, adjust the cable to be desired height.
- Wire to the main power.

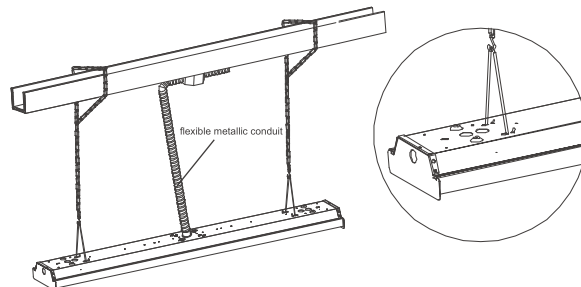

JWA-CPS WRAPAROUND LUMINAIRE

2. SELECTING CCT & WATTAGE INSTRUCTION

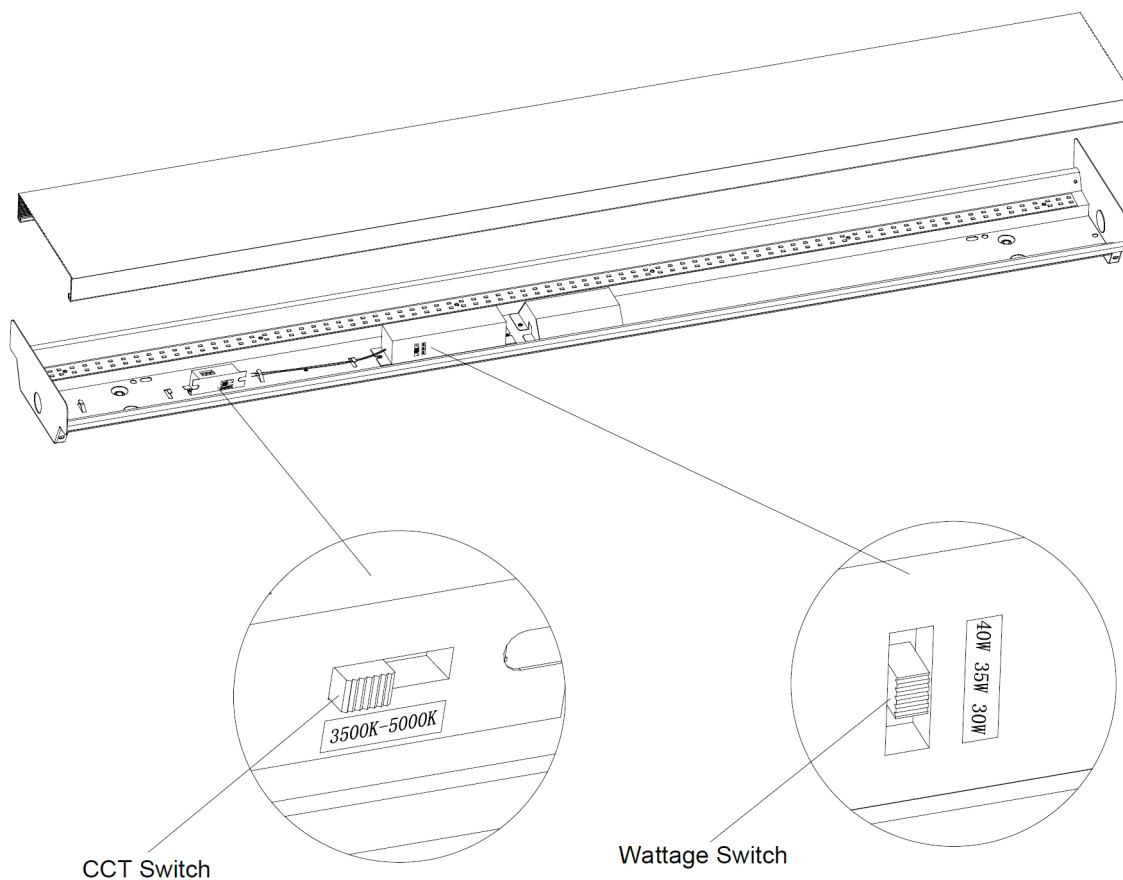

You may adjust CCT and Wattage with the two DIP switches. Each DIP switch has 3 positions corresponding to 3 CCT options (left for 3500K, middle for 4000K and right for 5000K) and 3 Wattage options (up for 40W, middle for 35W and down for 30W).

Factory settings: 3500K for CCT and 40W for Wattage

