



JWP-NCE-CPS SERIES


WARNING BEFORE YOU BEGIN READ THESE INSTRUCTIONS COMPLETELY AND CAREFULLY.




- Do not remove any part of the fixture.
- Specification please see the label on fixture.
- Specified as following: rated voltage: Min. 600V; rated connecting capacity: Min. 18AWG;
- any necessary preparation of the ends of conductors: the length of exposed ends of conductors shall not more than 8mm;
- Please mention the main specification as following before wiring.
- Before starting use of the light, please check if the light was damaged during transportation. If any damage is shown, please do not install or use it.
- The product itself and all its components should not be mechanically stressed.
- Installation must not damage or destroy conducting parts or other parts of the product.
- Installation of LED product (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
- Correct electrical polarity needs to be observed. Wrong polarity may damage or destroy the LED products.
- If using on metallic or otherwise conductive surfaces, there should be an electrical insulator between the product and the mounting surface.
- All LEDs are static sensitive. Precautions should be taken to ensure that LEDs are well protected from ESD during handling, even though the chips are safe in low static-electric discharge events.
- Do NOT operate LEDs in reverse bias.
- Damage by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
- Identify positive (+) and negative (-) outputs of the power supply by using a multimeter.
- Electrical connection should be in a dry area unless adequately sealed.
- This product series emits high light output. DO NOT look directly into the light emitting area. Direct exposure to the light over an extended time period may harm eyes.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

1.0 INSTALLATION INSTRUCTIONS - SURFACE MOUNT


Step1. Use a screw driver to unscrew the lamp screws and remove the upper half of the fixture.(Figure 1)

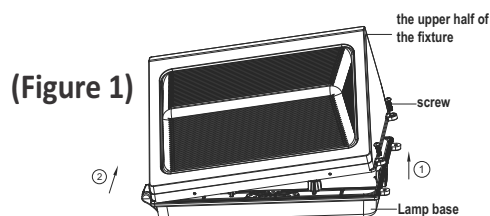


Step2. Unscrew the cover of the entry hole on the lamp base and remove the cover.(Figure 2)

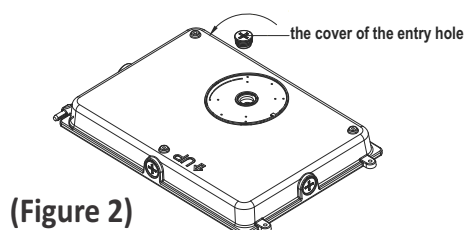

Step 3. According to the embedded terminal box, punch the corresponding mounting hole on the light's mount.(Figure 3)

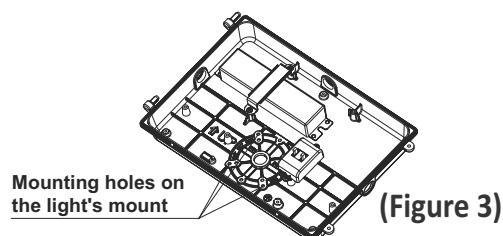


Step 4. Put the input line in the embedded box passes through the waterproof pad and then passed through the lamp base.(Figure 4)

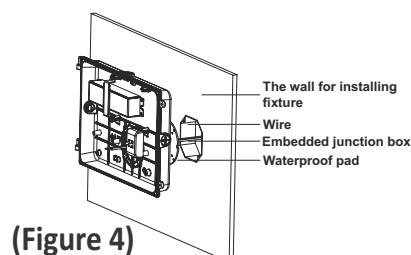




JWP-NCE-CPS SERIES

Step 5. Use screw to lock the lamp base on the embedded junction box.(Figure 5)




(Figure 5)

Step 6. Connect the input wire and the dimming wire of the light , then put the connected wires into the embedded terminal box.(Figure 6)




(Figure 6)

Step 7. Connect the out put wires of driver with the wires of PCB board. Please use "Dipper Switch",to achieve "Power and CCT Tunable" function.(Figure 7)

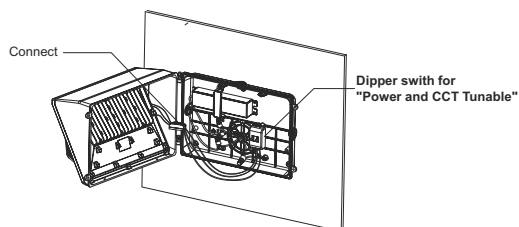

(Figure 7)

Step 8. Use screws to lock the fixture. Installation completed.(Figure 8)



(Figure 8)

