


JD-MSD SERIES SQUARE STEEL POLES DIRECT BURIAL

FEATURES

- **Pole specifications**
The installation height of the Straight Square Poles is 10 to 30 feet, and the wall thickness can be selected according to the installation height. Mainly used for sidetracking installation, mainly used in parks, schools.
- **Finish**
Bronze powdercoat finish to ensure maximum paint adhesion. Baked to ensure maximum hardness & durability.
- **Anchor bolts**
Anchor bolts are not included, sized based on pole data charts for the selected pole size.
- **Hand Hole**
Reinforced cast iron hand-hole cover with ground screw.
- **Pole Length**
Poles can be cut to a custom length according to order.
- **Installation**
After digging the corresponding size foundation hole by pressing the table at the location of the light pole installation, put the embedded end of the light pole into the hole, and keep it perpendicular to the ground, and fix it with concrete casting.
- **Luminaire Configurations**

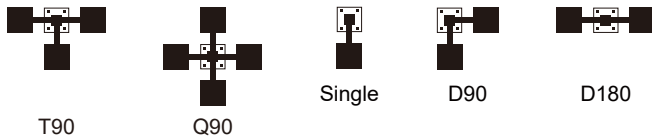


TECHNICAL DETAILS

Basic Model	Shaft Height (ft)	Shaft Size (in)	Wall thick (in)	Gauge	Weight (LBS)	Maximum EPA with 1.3 Gust Factor			
						80 mph	90 mph	100 mph	120mph
JD-MSD-10FT-4IN	10	4"	0.12	11	86	25.7	20.8	16.8	11.8
JD-MSD-15FT-4IN	15	4"	0.12	11	125	15.1	12.3	9.8	7.0
JD-MSD-20FT-4IN	20	4"	0.12	11	158	9.0	7.3	5.9	4.2
JD-MSD-25FT-4IN	25	5"	0.12	11	249	8.5	6.9	5.6	4.0

ORDERING INFORMATION / EXAMPLE: JD-MSD-10FT-4IN-11G-BZ-T-3FT

Product Series	Height	Shaft Size	Gauge	Finish Color	Mounting	Underground Size
JD-MSD	10FT 10 Feet 15FT 15 Feet 20FT 20 Feet 25FT 25 Feet	4IN 4 inch x 4 inch 5IN 5 inch x 5 inch	11G 0.12 inch	BZ Dark Bronze BK Black WH White S Silver Gray	T Tenon Adapter	3FT 3 Feet 4FT 4 Feet 5FT 5 Feet

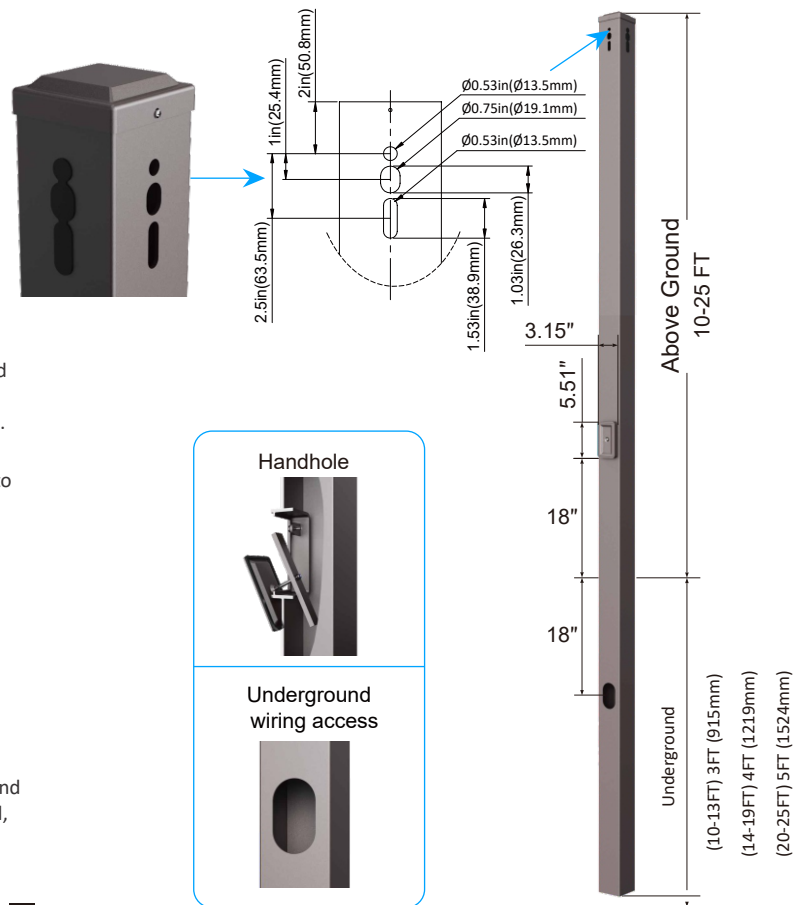

The above underground dimensions are recommended and customized dimensions are also available.

