



## SPECIFICATIONS

- **FINISH:** Architectural grade painted or anodized finish and custom color matching of RAL codes and architectural colors.
- **EMBEDDED SECTION:** Embedded section of the pole is coated with protective undercoating and includes a 0.5" wire way located approximately 18" below grade.
- **HAND HOLE:** 2" x 4" oval hand hole with grounding provision, cover, and hardware are provided.
- **ANCHOR BASE:** Anchor base is cast from 356 alloy aluminum.
- **POLE SHAFT:** Pole shaft is extruded from seamless 6063-T6 aluminum.
- **SURFACE TREATMENT:** All structural fasteners are galvanized high strength carbon steel; non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.
- Single source manufacturing to ensure poles, bases, arms, and fixtures fit together and ship complete
- Designed, engineered, and manufactured in Jademar Lighting
- Performance coatings and custom color matching of RAL codes and architectural colors
- Custom products, configurations, options, and accessories available
- Meets Buy American and BABAA standards

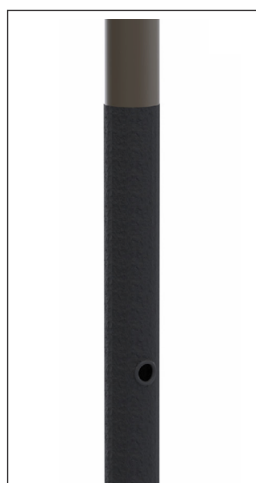

TOP CAP

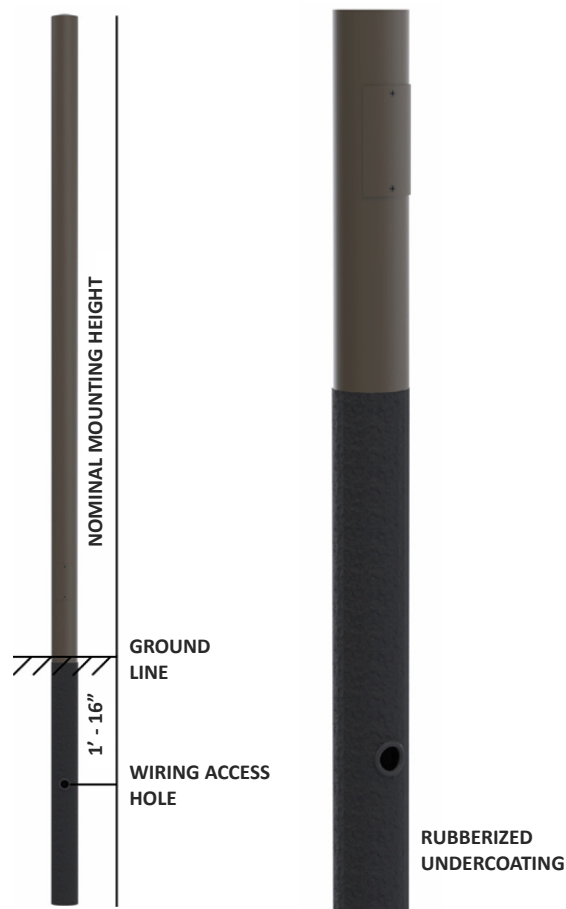

TENON TOP



VIBRATION  
DAMPENER



NPT PIPE  
COUPLING



HANDHOLE COVER



FESTOON



## SIZES DATA

| Base Model           | Nominal Mounting Height (Above Grade) | Below Grade Height | Overall Length | Top OD (in) | Base OD (in) | Wall Thick (in) | Structural Weight (lb) |
|----------------------|---------------------------------------|--------------------|----------------|-------------|--------------|-----------------|------------------------|
| JD-RSAD-08-40-40-125 | 8                                     | 4                  | 12             | 4           | 4            | 0.125           | 25                     |
| JD-RSAD-10-40-40-125 | 10                                    | 4                  | 14             | 4           | 4            | 0.125           | 29                     |
| JD-RSAD-10-40-40-188 | 10                                    | 4                  | 14             | 4           | 4            | 0.188           | 39                     |
| JD-RSAD-10-50-50-188 | 10                                    | 4                  | 14             | 5           | 5            | 0.188           | 45                     |
| JD-RSAD-12-40-40-125 | 12                                    | 4                  | 16             | 4           | 4            | 0.125           | 33                     |
| JD-RSAD-12-40-40-188 | 12                                    | 4                  | 16             | 4           | 4            | 0.188           | 44                     |
| JD-RSAD-12-50-50-188 | 12                                    | 4                  | 16             | 5           | 5            | 0.188           | 56                     |
| JD-RSAD-14-40-40-125 | 14                                    | 4                  | 18             | 4           | 4            | 0.125           | 36                     |
| JD-RSAD-14-40-40-188 | 14                                    | 4                  | 18             | 4           | 4            | 0.188           | 50                     |
| JD-RSAD-14-50-50-188 | 14                                    | 4                  | 18             | 5           | 5            | 0.188           | 63                     |
| JD-RSAD-15-40-40-125 | 15                                    | 4                  | 19             | 4           | 4            | 0.125           | 40                     |
| JD-RSAD-15-40-40-188 | 15                                    | 4                  | 19             | 4           | 4            | 0.188           | 56                     |
| JD-RSAD-15-50-50-188 | 15                                    | 4                  | 19             | 5           | 5            | 0.188           | 70                     |
| JD-RSAD-16-40-40-125 | 16                                    | 4                  | 20             | 4           | 4            | 0.125           | 42                     |
| JD-RSAD-16-40-40-188 | 16                                    | 4                  | 20             | 4           | 4            | 0.188           | 59                     |
| JD-RSAD-16-50-50-188 | 16                                    | 4                  | 20             | 5           | 5            | 0.188           | 74                     |
| JD-RSAD-18-40-40-188 | 18                                    | 4                  | 22             | 4           | 4            | 0.188           | 61                     |
| JD-RSAD-18-40-40-250 | 18                                    | 4                  | 22             | 4           | 4            | 0.250           | 79                     |
| JD-RSAD-18-50-50-188 | 18                                    | 5                  | 23             | 5           | 5            | 0.188           | 80                     |
| JD-RSAD-18-50-50-250 | 18                                    | 5                  | 23             | 5           | 5            | 0.250           | 105                    |
| JD-RSAD-20-40-40-188 | 20                                    | 4                  | 24             | 4           | 4            | 0.188           | 69                     |
| JD-RSAD-20-40-40-250 | 20                                    | 4                  | 24             | 4           | 4            | 0.250           | 90                     |
| JD-RSAD-20-50-50-188 | 20                                    | 5                  | 25             | 5           | 5            | 0.188           | 87                     |
| JD-RSAD-20-50-50-250 | 20                                    | 5                  | 25             | 5           | 5            | 0.250           | 114                    |
| JD-RSAD-20-60-60-188 | 20                                    | 5                  | 25             | 6           | 6            | 0.188           | 109                    |
| JD-RSAD-20-60-60-250 | 20                                    | 5                  | 25             | 6           | 6            | 0.250           | 143                    |
| JD-RSAD-22-60-60-188 | 22                                    | 5                  | 27             | 6           | 6            | 0.188           | 118                    |
| JD-RSAD-22-60-60-250 | 22                                    | 5                  | 27             | 6           | 6            | 0.250           | 154                    |
| JD-RSAD-24-60-60-188 | 24                                    | 5                  | 29             | 6           | 6            | 0.188           | 126                    |
| JD-RSAD-24-60-60-250 | 24                                    | 5                  | 29             | 6           | 6            | 0.250           | 165                    |
| JD-RSAD-25-60-60-188 | 25                                    | 5                  | 30             | 6           | 6            | 0.188           | 128                    |
| JD-RSAD-25-60-60-250 | 25                                    | 5                  | 30             | 6           | 6            | 0.250           | 167                    |
| JD-RSAD-28-60-60-188 | 28                                    | 5                  | 33             | 6           | 6            | 0.188           | 142                    |
| JD-RSAD-28-60-60-250 | 28                                    | 5                  | 33             | 6           | 6            | 0.250           | 185                    |
| JD-RSAD-30-60-60-188 | 30                                    | 5                  | 35             | 6           | 6            | 0.188           | 150                    |
| JD-RSAD-30-60-60-250 | 30                                    | 5                  | 35             | 6           | 6            | 0.250           | 196                    |

1. The total combined Effective Projected Area (EPA) and weight of all fixtures, brackets, and other attachments mounting to a light pole cannot exceed the EPA and weight rating for a specified pole.
2. Custom products, configurations, options, and accessories available.
3. Satisfactory performance of light poles is dependent upon the structure being properly attached to a supporting foundation of adequate design.  
"+" indicates a vibration dampener is standard.




## PERFORMANCE DATA

| Base Model           | 80mph w/ 1.3 Gust |                 | 90mph w/ 1.3 Gust |                 | 100mph w/ 1.3 Gust |                 | 110mph w/ 1.3 Gust |                 | 120mph w/ 1.3 Gust |                 |
|----------------------|-------------------|-----------------|-------------------|-----------------|--------------------|-----------------|--------------------|-----------------|--------------------|-----------------|
|                      | Max EPA (sq ft)   | Max Weight (lb) | Max EPA (sq ft)   | Max Weight (lb) | Max EPA (sq ft)    | Max Weight (lb) | Max EPA (sq ft)    | Max Weight (lb) | Max EPA (sq ft)    | Max Weight (lb) |
| JD-RSAD-08-40-40-125 | 10.8              | 100             | 8.3               | 100             | 6.5                | 100             | 6.0                | 100             | 4.9                | 100             |
| JD-RSAD-10-40-40-125 | 8.4               | 100             | 6.4               | 100             | 4.9                | 100             | 4.5                | 100             | 3.5                | 100             |
| JD-RSAD-10-40-40-188 | 12.9              | 100             | 9.9               | 100             | 7.7                | 100             | 7.1                | 100             | 5.7                | 100             |
| JD-RSAD-10-50-50-188 | 21.4              | 125             | 16.5              | 125             | 13.0               | 125             | 12.0               | 125             | 9.8                | 125             |
| JD-RSAD-12-40-40-125 | 6.7               | 100             | 4.9               | 100             | 3.6                | 100             | 3.2                | 100             | 2.4                | 100             |
| JD-RSAD-12-40-40-188 | 10.4              | 100             | 7.9               | 100             | 6.0                | 100             | 5.5                | 100             | 4.3                | 100             |
| JD-RSAD-12-50-50-188 | 17.6              | 125             | 13.5              | 125             | 10.5               | 125             | 9.6                | 125             | 7.7                | 125             |
| JD-RSAD-14-40-40-125 | 5.2               | 100             | 3.6               | 100             | 2.5                | 100             | 2.2                | 100             | 1.5                | 100             |
| JD-RSAD-14-40-40-188 | 8.5               | 100             | 6.2               | 100             | 4.6                | 100             | 4.2                | 100             | 3.2                | 100             |
| JD-RSAD-14-50-50-188 | 14.6              | 125             | 11.0              | 125             | 8.4                | 125             | 7.6                | 125             | 6.0                | 125             |
| JD-RSAD-15-40-40-125 | 4.4               | 100             | 3.0               | 100             | 2.0                | 100             | 1.7                | 100             | 1.1                | 100             |
| JD-RSAD-15-40-40-188 | 7.5               | 100             | 5.5               | 100             | 4.0                | 100             | 3.6                | 100             | 2.6                | 100             |
| JD-RSAD-15-50-50-188 | 13.2              | 125             | 9.8               | 125             | 7.4                | 125             | 6.7                | 125             | 5.2                | 125             |
| JD-RSAD-16-40-40-125 | 3.8               | 100             | 2.5               | 100             | 1.5                | 100             | 1.3                | 100             | 0.7                | 100             |
| JD-RSAD-16-40-40-188 | 6.7               | 100             | 4.8               | 100             | 3.4                | 100             | 3.0                | 100             | 2.1                | 100             |
| JD-RSAD-16-50-50-188 | 11.8              | 125             | 8.7               | 125             | 6.5                | 125             | 5.8                | 125             | 4.4                | 100             |
| JD-RSAD-18-40-40-188 | 5.2               | 100             | 3.5               | 100             | 2.3                | 100             | 1.9                | 100             | 1.2                | 100             |
| JD-RSAD-18-40-40-250 | 7.4               | 100             | 5.3               | 100             | 3.7                | 100             | 3.3                | 100             | 2.3                | 100             |
| JD-RSAD-18-50-50-188 | 9.5               | 125             | 6.8               | 125             | 4.8                | 125             | 4.3                | 125             | 3.0                | 125             |
| JD-RSAD-18-50-50-250 | 13.5              | 125             | 9.8               | 125             | 7.3                | 125             | 6.6                | 125             | 5.0                | 125             |
| JD-RSAD-20-40-40-188 | 3.8               | 100             | 2.4               | 100             | 1.3                | 100             | 1.0                | 100             | 0.3                | 100             |
| JD-RSAD-20-40-40-250 | 5.9               | 100             | 4.0               | 100             | 2.6                | 100             | 2.2                | 100             | 1.3                | 100             |
| JD-RSAD-20-50-50-188 | 7.6               | 125             | 5.2               | 125             | 3.4                | 125             | 3.0                | 125             | 1.8                | 125             |
| JD-RSAD-20-50-50-250 | 11.0              | 125             | 7.9               | 125             | 5.6                | 125             | 5.0                | 125             | 3.6                | 125             |
| JD-RSAD-20-60-60-188 | 12.8              | 150             | 9.3               | 150             | 6.7                | 150             | 5.9                | 150             | 4.3                | 150             |
| JD-RSAD-20-60-60-250 | 18.2              | 150             | 13.4              | 150             | 10.0               | 150             | 9.0                | 150             | 6.9                | 150             |
| JD-RSAD-22-60-60-188 | 10.7              | 150             | 7.4               | 150             | 5.1                | 150             | 4.4                | 150             | 2.9                | 150             |
| JD-RSAD-22-60-60-250 | 15.3              | 150             | 11.1              | 150             | 8.1                | 150             | 7.2                | 150             | 5.3                | 150             |
| JD-RSAD-24-60-60-188 | 8.6               | 150             | 5.7               | 150             | 3.6                | 150             | 3                  | 150             | 1.6                | 150             |
| JD-RSAD-24-60-60-250 | 12.9              | 150             | 9.1               | 150             | 6.3                | 150             | 5.5                | 150             | 3.8                | 150             |
| JD-RSAD-25-60-60-188 | 7.7               | 150             | 4.9               | 150             | 2.9                | 150             | 2.3                | 150             | 1.1                | 150             |
| JD-RSAD-25-60-60-250 | 11.6              | 150             | 8.1               | 150             | 5.5                | 150             | 4.7                | 150             | 3.1                | 150             |
| JD-RSAD-28-60-60-188 | 5.2               | 150             | 2.8               | 150             | 1                  | 150             | 0.6                | 150             | N/A                | N/A             |
| JD-RSAD-28-60-60-250 | 8.8               | 150             | 5.6               | 150             | 3.3                | 150             | 2.7                | 150             | 1.2                | 150             |
| JD-RSAD-30-60-60-188 | 3.8               | 150             | 1.5               | 150             | N/A                | N/A             | N/A                | N/A             | N/A                | N/A             |
| JD-RSAD-30-60-60-250 | 7                 | 150             | 4.1               | 150             | 2                  | 150             | 1.4                | 150             | N/A                | N/A             |

1. The total combined Effective Projected Area (EPA) and weight of all fixtures, brackets, and other attachments mounting to a light pole cannot exceed the EPA and weight rating for a specified pole.
2. Standard EPA and weight values are based around AASHTO 2020 design criteria (with 3 second gust factor). Specific light pole design standards are available from Jademar Lighting. Above data is based around the load centroid being at 2.5' above the pole top and with 2.0' eccentricity. Weight of horizontally eccentric load is capped at 100lb, with all remaining weight mounted 2.5' above top of the pole.
3. Custom products, configurations, options, and accessories available.
4. Satisfactory performance of light poles is dependent upon the structure being properly attached to a supporting foundation of adequate design.

"+" indicates a vibration dampener is standard.



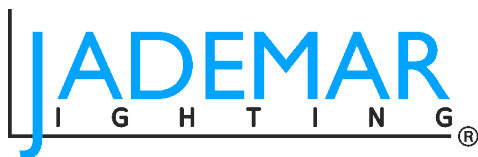

# JD-RSAD ROUND STRAIGHT ALUMINUM DIRECT BURIAL


## PERFORMANCE DATA


| Base Model           | 130mph          |                 | 140mph          |                 | 150mph          |                 | 160mph          |                 | 170mph          |                 | 180mph          |                 |
|----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                      | Max EPA (sq ft) | Max Weight (lb) | Max EPA (sq ft) | Max Weight (lb) | Max EPA (sq ft) | Max Weight (lb) | Max EPA (sq ft) | Max Weight (lb) | Max EPA (sq ft) | Max Weight (lb) | Max EPA (sq ft) | Max Weight (lb) |
| JD-RSAD-08-40-40-125 | 6.0             | 100             | 5.8             | 100             | 5.0             | 100             | 4.3             | 100             | 3.6             | 100             | 3.1             | 100             |
| JD-RSAD-10-40-40-125 | 4.6             | 100             | 4.4             | 100             | 3.6             | 100             | 3.0             | 100             | 2.5             | 100             | 2.1             | 100             |
| JD-RSAD-10-40-40-188 | 9.9             | 100             | 9.6             | 100             | 8.2             | 100             | 7.0             | 100             | 6.0             | 100             | 5.2             | 100             |
| JD-RSAD-10-50-50-188 | 10.1            | 125             | 9.8             | 125             | 8.3             | 125             | 7.1             | 125             | 6.0             | 125             | 5.2             | 125             |
| JD-RSAD-12-40-40-125 | 3.3             | 100             | 3.2             | 100             | 2.6             | 100             | 2.0             | 100             | 1.6             | 100             | 1.2             | 100             |
| JD-RSAD-12-40-40-188 | 4.5             | 100             | 4.3             | 100             | 3.5             | 100             | 2.9             | 100             | 2.3             | 100             | 1.9             | 100             |
| JD-RSAD-12-50-50-188 | 8.0             | 125             | 7.7             | 125             | 6.4             | 125             | 5.3             | 125             | 4.5             | 125             | 3.8             | 125             |
| JD-RSAD-14-40-40-125 | 2.3             | 100             | 2.2             | 100             | 1.6             | 100             | 1.2             | 100             | 0.8             | 100             | 0.5             | 100             |
| JD-RSAD-14-40-40-188 | 4.2             | 100             | 4.0             | 100             | 3.2             | 100             | 2.6             | 100             | 2.0             | 100             | 1.6             | 100             |
| JD-RSAD-14-50-50-188 | 7.7             | 125             | 7.4             | 125             | 6.1             | 125             | 5.0             | 125             | 4.1             | 125             | 3.4             | 125             |
| JD-RSAD-15-40-40-125 | 1.1             | 100             | 1.0             | 100             | 0.6             | 100             | 0.3             | 100             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-15-40-40-188 | 2.7             | 100             | 2.6             | 100             | 2.0             | 100             | 1.4             | 100             | 1.0             | 100             | 0.6             | 100             |
| JD-RSAD-15-50-50-188 | 5.4             | 125             | 5.1             | 125             | 4.1             | 125             | 3.2             | 125             | 2.5             | 125             | 1.9             | 125             |
| JD-RSAD-16-40-40-125 | 0.8             | 100             | 0.7             | 100             | 0.3             | 100             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-16-40-40-188 | 3.0             | 100             | 2.9             | 100             | 2.2             | 100             | 1.6             | 100             | 1.1             | 100             | 0.7             | 100             |
| JD-RSAD-16-50-50-188 | 5.9             | 125             | 5.7             | 125             | 4.5             | 125             | 3.6             | 125             | 2.8             | 125             | 2.2             | 125             |
| JD-RSAD-18-40-40-188 | 1.3             | 100             | 1.2             | 100             | 0.6             | 100             | 0.2             | 100             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-18-40-40-250 | 2.4             | 100             | 2.3             | 100             | 1.6             | 100             | 1.1             | 100             | 0.6             | 100             | 0.3             | 100             |
| JD-RSAD-18-50-50-188 | 4.3             | 125             | 4.1             | 125             | 3.1             | 125             | 2.3             | 125             | 1.6             | 125             | 1.1             | 125             |
| JD-RSAD-18-50-50-250 | 6.6             | 125             | 6.4             | 125             | 5.1             | 125             | 4.0             | 125             | 3.2             | 125             | 2.5             | 125             |
| JD-RSAD-20-40-40-188 | 0.4             | 100             | 0.3             | 100             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-20-40-40-250 | 1.5             | 100             | 1.3             | 100             | 0.7             | 100             | 0.3             | 100             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-20-50-50-188 | 3.0             | 125             | 2.8             | 125             | 1.9             | 125             | 1.2             | 125             | 0.6             | 125             | N/A             | N/A             |
| JD-RSAD-20-50-50-250 | 5.0             | 125             | 4.8             | 125             | 3.7             | 125             | 2.7             | 125             | 2.0             | 125             | 1.3             | 125             |
| JD-RSAD-20-60-60-188 | 6.0             | 150             | 5.7             | 150             | 4.4             | 150             | 3.4             | 150             | 2.5             | 150             | 1.7             | 150             |
| JD-RSAD-20-60-60-250 | 9.0             | 150             | 8.8             | 150             | 7.1             | 150             | 5.7             | 150             | 4.5             | 150             | 3.6             | 150             |
| JD-RSAD-22-60-60-188 | 3.1             | 150             | 2.9             | 150             | 1.9             | 150             | 1.1             | 150             | 0.4             | 150             | N/A             | N/A             |
| JD-RSAD-22-60-60-250 | 5.5             | 150             | 5.2             | 150             | 3.9             | 150             | 2.9             | 150             | 2               | 150             | 1.2             | 150             |
| JD-RSAD-24-60-60-188 | 1.8             | 150             | 1.6             | 150             | 0.7             | 150             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-24-60-60-250 | 4               | 150             | 3.8             | 150             | 2.6             | 150             | 1.6             | 150             | 0.8             | 150             | N/A             | N/A             |
| JD-RSAD-25-60-60-188 | 1.2             | 150             | 1               | 150             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-25-60-60-250 | 3.3             | 150             | 3.1             | 150             | 2               | 150             | 1               | 150             | 0.3             | 150             | N/A             | N/A             |
| JD-RSAD-28-60-60-188 | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-28-60-60-250 | 1.4             | 150             | 1.2             | 150             | 0.2             | 150             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-30-60-60-188 | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             |
| JD-RSAD-30-60-60-250 | 0.3             | 150             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             | N/A             |

1. The total combined EPA and weight of all fixtures, brackets, and other attachments mounting to a light pole cannot exceed the EPA and weight rating for a specified pole.
  2. Standard EPA and weight values are based around 2020 FL Code. Specific light pole design standards are available from Jademar Lighting. Above data is based around the load centroid being at 2.5' above the pole top and with 2.0' eccentricity. Weight of horizontally eccentric load is capped at 100lb, with all remaining weight mounted 2.5' above top of the pole..
  3. Custom products, configurations, options, and accessories available from factory.
  4. Satisfactory performance of light poles is dependent upon the structure being properly attached to a supporting foundation of adequate design.
- "+" indicates a vibration dampener is standard



## DIMENSION

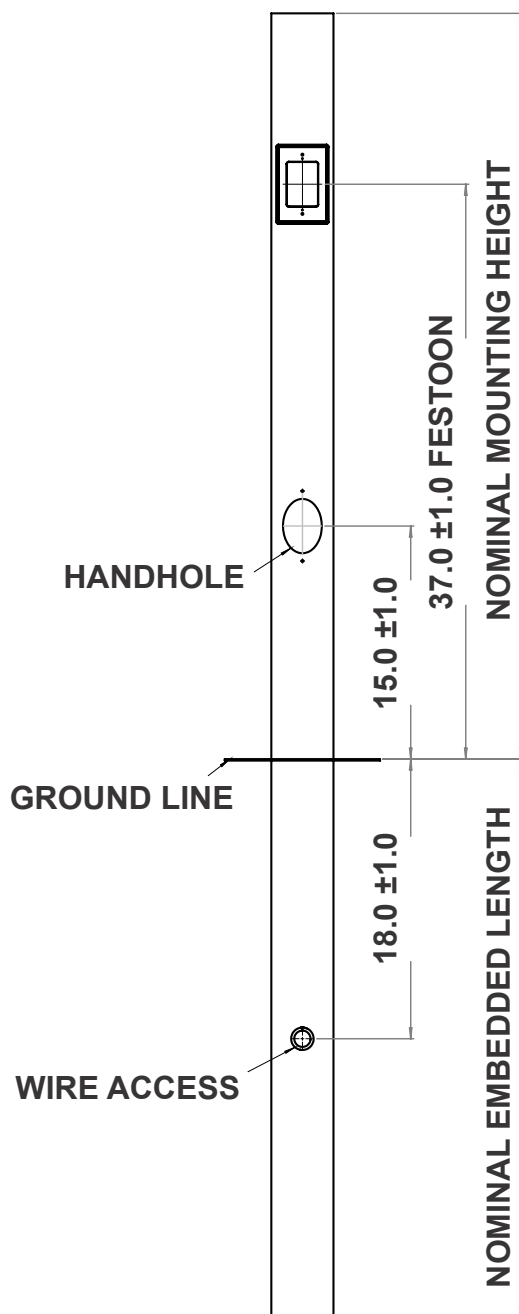

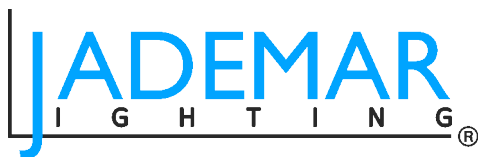

# JD-RSAD ROUND STRAIGHT ALUMINUM DIRECT BURIAL

## JD-RSAD ROUND STRAIGHT ALUMINUM DIRECT BURIAL ORDERING INFORMATION / Example: JD-RSAD-8-40-40-125-AN-BK-PL-BABAA

| JD-RSAD        | Length                     | Pole Base OD                        | Pole Top OD                         | Wall Thickness                                  |
|----------------|----------------------------|-------------------------------------|-------------------------------------|-------------------------------------------------|
| Product Series | Length                     | Pole Base OD                        | Pole Top OD                         | Wall Thickness                                  |
| JD-RSAD        | 8 8'                       | 40 4"                               | 40 4"                               | 125 0.125"                                      |
|                | 12 12'                     | 50 5"                               | 50 5"                               | 188 0.188"                                      |
|                | 14 14'                     | 60 6"                               | 60 6"                               | 250 0.250"                                      |
|                | 15 15'                     | CC Custom (Special Order)*          | CC Custom (Special Order)*          | CC Custom (Special Order)*                      |
|                | 16 16'                     |                                     |                                     |                                                 |
|                | 18 18'                     | * Replace the "CC" with a custom OD | * Replace the "CC" with a custom OD | * Replace the "CC" with a custom Wall Thickness |
|                | 20 20'                     |                                     |                                     |                                                 |
|                | 22 22'                     |                                     |                                     |                                                 |
|                | 24 24'                     |                                     |                                     |                                                 |
|                | 25 25'                     |                                     |                                     |                                                 |
|                | 28 28'                     |                                     |                                     |                                                 |
|                | 30 30'                     |                                     |                                     |                                                 |
|                | CC Custom (Special Order)* |                                     |                                     |                                                 |

\* Replaced "CC" with a custom Length

| Finish Type                | Finish Color               | Fixture Mounting              | Other Options                     |
|----------------------------|----------------------------|-------------------------------|-----------------------------------|
| FP Finished Painted        | BK Black                   | PC Cap Only, No Side Drilling | Blank Not BAA/BABAA               |
| AN Anodized                | MB Medium Bronze           | PL Open Top, No Cap           | BABAA Build America, Buy America* |
| CC Custom (Special Order)* | DB Dark Bronze             | PF Flush Arm Fit              | BAA Buy American Act*             |
|                            | WH White                   | D1 Drill Single               | * Selected SKUs Only              |
|                            | NA Natural Aluminum Silver | D2 Drill 2@180                |                                   |
|                            | LG Light Gray              | D3 Drill 3@120                |                                   |
|                            | SG Slate Gray              | D4 Drill 4@90                 |                                   |
|                            | DG Dark Green              | D5 Drill 2@90                 |                                   |
|                            | DP Dark Platinum           | D6 Drill 3@90                 |                                   |
|                            | GM Graphite Metallic       | P1 4" OD x 5" Long Tenon      |                                   |
|                            | BA Bronze Anodized         | P2 2.38" OD x 4" Long Tenon   |                                   |
|                            | BKA Black Anodized         | P3 3.50" OD x 6" Long Tenon   |                                   |
|                            | SA Satin Silver Anodized   | P4 4" OD x 6" Long Tenon      |                                   |
|                            | CC Custom (Special Order)* | P5 2.88" OD x 4" Long Tenon   |                                   |
|                            |                            | P6 2.88" OD x 5" Long Tenon   |                                   |
|                            |                            | P7 2.38" OD x 5" Long Tenon   |                                   |
|                            |                            | PQ 2.38" OD x 12" Long Tenon  |                                   |
|                            |                            | PD 3" OD x 3" Long Tenon      |                                   |
|                            |                            | CC Custom (Special Order)*    |                                   |

\* Replace the "CC" with a custom size Tenon

### OPTIONS

|            |                                                                                                           |
|------------|-----------------------------------------------------------------------------------------------------------|
| SPL        | Special Cut Length (Please Specify)                                                                       |
| VDA        | Internal Vibration Dampener, Factory Installed                                                            |
| HHUR-4/5/6 | Additional Unreinforced Hand Hole Opening w/ Cover Assembly (Specify Pole Height & Orientation)           |
| HHRR-4/5/6 | Additional Reinforced Hand Hole Opening w/ Cover Assembly (Specify Pole Height & Orientation)             |
| FSTR       | Festoon Provision, Electrical by Others (Specify Pole Height & Orientation, Minimum 37" Above Base Plate) |
| CPL-P-12   | 1/2" NPT Pipe-Thread Female Coupling (Specify Pole Height & Orientation)                                  |
| CPL-P-34   | 3/4" NPT Pipe-Thread Female Coupling (Specify Pole Height & Orientation)                                  |
| CPL-P-1    | 1" NPT Pipe-Thread Female Coupling (Specify Pole Height & Orientation)                                    |
| CPL-S-12   | 1/2" NPSM Straight-Thread Female Coupling (Specify Pole Height & Orientation)                             |
| CPL-S-34   | 3/4" NPSM Straight-Thread Female Coupling (Specify Pole Height & Orientation)                             |
| CPL        | Custom Coupling (Please Specify)                                                                          |

### ACCESSORIES

|         |                                                |
|---------|------------------------------------------------|
| STAMP   | Engineering Services, Signed & Sealed Calcs    |
| STAMPCA | Engineering Services, CA Signed & Sealed Calcs |
| VDF     | Internal Vibration Dampener, Field Installable |



Miami, FL USA - info@jademar.com  
T: 305.640.0465 - F: 305.640.0468  
**WWW.JADEMAR.COM**



Information contained herein is subject to change without notice.  
Revised 04/2025