

SPECIFICATION

- Embedded, anchor base, and custom base options
- Pole shaft is extruded from seamless 6063-T6 aluminum and anchor base is cast from 356 alloy aluminum
- Completed pole/base assembly is heat treated to T6 temper after welding and machining operations (for anchor base poles 16' and above)
- 2" x 4" oval hand hole with grounding provision, cover, and hardware are provided
- For direct burial applications the embedded section of the pole is coated with protective undercoating and includes a 0.5" wireway located approximately 18" below grade
- Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers; bolts have an "L" bend on one end and are galvanized a minimum of 12" on the threaded end
- Rugged cast aluminum or spun aluminum base covers available
- All structural fasteners are galvanized high strength carbon steel; non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel
- Architectural grade painted or anodized finish and custom color matching of RAL codes and architectural colors available
- Decoral® Wood Grain System available
- See loading tables below for design criteria and EPA loading
- Local specifying engineer recommended for product selection and local compliance; connect with Jademar support for guidance

CAST ALUMINUM CLAMSHELL BASE COVER

- Clamshell design for easy install of retrofits and new light poles
- Rugged, low copper aluminum casting and stainless steel hardware for superior strength and corrosion resistance
- Architectural grade powder coat or painted finish and custom color matching of RAL codes and architectural colors
- Custom products, configurations, options, and accessories available
- Both standard and tamper proof stainless steel hardware included in hardware kit

BANNER ARMS

- Cast aluminum brackets with fiberglass arms (painted to match poles)
- Light poles ship from factory with bolt mounting provisions when requested; includes stainless steel mounting hardware
- Spills 87% of wind during wind-tunnel testing
- Reduces stress on light poles and increases life of banners
- Decreases installation labor and change out costs for damaged banners
- Rated for banners up to 17.5 sq ft; other sizes available upon request
- Total combined Effective Projected Area (EPA) and weight of all banners, fixtures, brackets, and other attachments mounting to a light pole cannot exceed the EPA and weight rating for a specified pole
- Local specifying engineer recommended for product selection and local compliance; connect with Jademar support for guidance
- Single source manufacturing to ensure poles, bases, arms, and fixtures fit together and ship complete
- Designed, engineered, and manufactured in Wisconsin, USA
- Performance coatings and custom color matching of RAL codes and architectural colors
- Custom products, configurations, options, and accessories available
- Meets Buy American and BABA standards
- Smart pole city infrastructure and technology integrations available by contacting Jademar support



Shown with custom Jademar GVX RGB light fixture and SH3 decorative suspension arm

Shown with CL2 Decorative Clamshell Base Cover



PERFORMANCE DATA

Standard Model	80mph w/ 3 Gust		90mph w/ 3 Gust		100 mph w/ 3 Gust		110 mph w/ 3 Gust		120 mph w/ 3 Gust	
	Max EPA (sq ft)	Max Weight (lb)	Max EPA (sq ft)	Max Weight (lb)	Max EPA (sq ft)	Max Weight (lb)	Max EPA (sq ft)	Max Weight (lb)	Max EPA (sq ft)	Max Weight (lb)
JWD-RSAX-08-40-40-125	10.8	100	8.3	100	6.5	100	6.0'	100	4.9	100
JWD-RSAX-08-40-40-188	16.2	100	12.5	100	9.9	100	9.1	100	7.5	100
JWD-RSAX-10-40-40-125	8.4	100	6.4	100	4.9	100	4.5	100	3.5	100
JWD-RSAX-10-40-40-188	12.9	100	9.9	100	7.7	100	7.1	100	5.7	100
JWD-RSAX-10-50-50-188	21.4	125	16.5	125	13.0'	125	12.0'	125	9.8	125
JWD-RSAX-10-60-60-188	32.0'	150	25	150	19.7	150	18.3	150	15.2	150
JWD-RSAX-12-40-40-125	6.7	100	4.9	100	3.6	100	3.2	100	2.4	100
JWD-RSAX-12-40-40-188	10.4	100	7.9	100	6.0'	100	5.5	100	4.3	100
JWD-RSAX-12-50-50-188	17.6	125	13.5	125	10.5	125	9.6	125	7.7	125
JWD-RSAX-12-60-60-188	26.9	150	20.8	150	16.3	150	15.1	150	12.3	150
JWD-RSAX-14-40-40-125	5.2	100	3.6	100	2.5	100	2.2	100	1.5	100
JWD-RSAX-14-40-40-188	8.5	100	6.2	100	4.6	100	4.2	100	3.2	100
JWD-RSAX-14-50-50-188	14.6	125	11.0'	125	8.4	125	7.6	125	6.0'	125
JWD-RSAX-14-60-60-188	22.6	150	17.3	150	13.4	150	12.3	150	9.9	150
JWD-RSAX-15-40-40-125	4.4	100	3.0'	100	2.0'	100	1.7	100	1.1	100
JWD-RSAX-15-40-40-188	7.5	100	5.5	100	4.0'	100	3.6	100	2.6	100
JWD-RSAX-15-50-50-188	13.2	125	9.8	125	7.4	125	6.7	125	5.2	125
JWD-RSAX-15-60-60-188	20.6	150	15.6	150	12.0'	150	11.0'	150	8.8	150
JWD-RSAX-16-40-40-125	3.8	100	2.5	100	1.5	100	1.3	100	0.7	100
JWD-RSAX-16-40-40-188	6.7	100	4.8	100	3.4	100	3.0'	100	1.2	100
JWD-RSAX-16-50-50-188	11.8	125	8.7	125	6.5	125	5.8	125	4.4	100
JWD-RSAX-16-60-60-188	18.8	150	14.0'	150	10.8	150	9.8	150	7.7	150
JWD-RSAX-18-40-40-188	5.2	100	3.5	100	2.3	100	1.9	100	1.2	100
JWD-RSAX-18-40-40-250	7.4	100	5.3	100	3.7	100	3.3	100	2.3	100
JWD-RSAX-18-50-50-188	9.5	125	6.8	125	4.8	125	4.3	125	3.0'	125
JWD-RSAX-18-50-50-250	13.5	125	9.8	125	7.3	125	6.6	125	5.0'	125
JWD-RSAX-18-60-60-188	15.6	150	16.0'	150	8.5	150	7.8	150	5.9	150
JWD-RSAX-18-60-60-250	21.5	150	2.4	100	12.2	150	11.2	150	8.8	150
JWD-RSAX-20-40-40-188	3.8	100	2.4	100	1.3	100	1.0'	100	0.3'	100
JWD-RSAX-20-40-40-250	5.9	100	4.0'	100	2.6	100	2.2	100	1.3	125
JWD-RSAX-20-50-50-188	7.6	125	5.2	125	3.4	125	3.0'	125	1.8	125
JWD-RSAX-20-50-50-250	11.0'	125	7.9	125	5.6	125	5.0'	125	3.6	125
JWD-RSAX-20-60-60-188	12.8	150	9.3	150	6.7	150	5.9	150	4.3	150
JWD-RSAX-20-60-60-250	18.2	150	13.4	150	10	150	9.0'	150	6.9	150

1. The total combined Effective Projected Area (EPA) and weight of all fixtures, brackets, and other attachments mounting to a light pole cannot exceed the EPA and weight rating for a specified pole.
2. Standard EPA and weight values are based around AASHTO 2020 design criteria (with 3 second gust factor). Specific light pole design standards are available from Jademar support. Above data is based around the load centroid being at 2.5' above the pole top and with 2.0' eccentricity. Weight of horizontally eccentric load is capped at 100lb, with all remaining weight mounted 2.5' above top of the pole.
3. Custom products, configurations, options, and accessories available.
4. Satisfactory performance of light poles is dependent upon the structure being properly attached to a supporting foundation of adequate design.

"+" indicates a vibration dampener is standard.



PERFORMANCE DATA

Standard Model	130mph		140mph		150 mph		160 mph		170 mph		180 mph	
	Max EPA (sq ft)	Max Weight (lb)	Max EPA (sq ft)	Max Weight (lb)	Max EPA (sq ft)	Max Weight (lb)	Max EPA (sq ft)	Max Weight (lb)	Max EPA (sq ft)	Max Weight (lb)	Max EPA (sq ft)	Max Weight (lb)
JWD-RSAX-08-40-40-125	6.0	100	5.8	100	5.0	100	4.3	100	3.6	100	3.1	100
JWD-RSAX-08-40-40-188	12.6	100	12.1	100	10.5	100	9.1	100	7.9	100	6.9	100
JWD-RSAX-10-40-40-125	4.6	100	4.4	100	3.6	100	3.0	100	2.5	100	2.1	100
JWD-RSAX-10-40-40-188	9.9	100	9.6	100	8.2	100	7.0	100	6.0	100	5.2	100
JWD-RSAX-10-50-50-188	10.1	125	9.8	125	8.3	125	7.1	125	6.0	125	5.2	125
JWD-RSAX-10-60-60-188	15.6	150	15.1	150	12.9	150	11.1	150	9.6	150	8.3	150
JWD-RSAX-12-40-40-125	3.3	100	3.2	100	2.6	100	2.0	100	1.6	100	1.2	100
JWD-RSAX-12-40-40-188	4.5	100	4.3	100	3.5	100	2.9	100	2.3	100	1.9	100
JWD-RSAX-12-50-50-188	8.0	125	7.7	125	6.4	125	5.3	125	4.5	125	3.8	125
JWD-RSAX-12-60-60-188	12.6	150	12.2	150	10.3	150	8.8	150	7.5	150	6.4	150
JWD-RSAX-14-40-40-125	2.3	100	2.2	100	1.6	100	1.2	100	0.8	100	0.5	100
JWD-RSAX-14-40-40-188	4.2	100	4.0	100	3.2	100	2.6	100	2.0	100	1.6	100
JWD-RSAX-14-50-50-188	7.7	125	7.4	125	6.1	125	5.0	125	4.1	125	3.4	125
JWD-RSAX-14-60-60-188	10.2	150	9.8	150	8.2	150	6.8	150	5.7	150	4.8	150
JWD-RSAX-15-40-40-125	1.1	100	1.0	100	0.6	100	0.3	100	N/A	N/A	N/A	N/A
JWD-RSAX-15-40-40-188	2.7	100	2.6	100	2.0	100	1.4	100	1.0	100	0.6	100
JWD-RSAX-15-50-50-188	5.4	125	5.1	125	4.1	125	3.2	125	2.5	125	1.9	125
JWD-RSAX-15-60-60-188	9.0	150	8.7	150	7.2	150	5.9	150	4.9	150	4.0	150
JWD-RSAX-16-40-40-125	0.8	100	0.7	100	0.3	100	N/A	N/A	N/A	N/A	N/A	N/A
JWD-RSAX-16-40-40-188	3.0	100	2.9	100	2.2	100	1.6	100	1.1	100	0.7	100
JWD-RSAX-16-50-50-188	5.9	125	5.7	125	4.5	125	3.6	125	2.8	125	2.2	125
JWD-RSAX-16-60-60-188	9.9	150	9.6	150	7.9	150	6.5	150	5.4	150	4.4	150
JWD-RSAX-18-40-40-188	1.3	100	1.2	100	0.6	100	0.2	100	N/A	N/A	N/A	N/A
JWD-RSAX-18-40-40-250	2.4	100	2.3	100	1.6	100	1.1	100	0.6	100	0.3	100
JWD-RSAX-18-50-50-188	4.3	125	4.1	125	3.1	125	2.3	125	1.6	125	1.1	125
JWD-RSAX-18-50-50-250	6.6	125	6.4	125	5.1	125	4.0	125	3.2	125	2.5	125
JWD-RSAX-18-60-60-188	7.8	150	7.5	150	6.0	150	4.8	150	3.8	150	3.0	150
JWD-RSAX-18-60-60-250	11.3	150	10.8	150	9.0	150	7.4	150	6.1	150	5.0	150
JWD-RSAX-20-40-40-188	0.4	100	0.3	100	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
JWD-RSAX-20-40-40-250	1.5	100	1.3	100	0.7	100	0.3	100	N/A	N/A	N/A	N/A
JWD-RSAX-20-50-50-188	3.0	125	2.8	125	1.9	125	1.2	125	0.6	125	N/A	N/A
JWD-RSAX-20-50-50-250	5.0	125	4.8	125	3.7	125	2.7	125	2.0	125	1.3	125
JWD-RSAX-20-60-60-188	6.0	150	5.7	150	4.4	150	3.4	150	2.5	150	1.7	150
JWD-RSAX-20-60-60-250	9.0	150	8.8	150	7.1	150	5.7	150	4.5	150	3.6	150

1. The total combined Effective Projected Area (EPA) and weight of all fixtures, brackets, and other attachments mounting to a light pole cannot exceed the EPA and weight rating for a specified pole.
2. Standard EPA and weight values are based around AASHTO 2020 design criteria (with 3 second gust factor). Specific light pole design standards are available from Jademar support. Above data is based around the load centroid being at 2.5' above the pole top and with 2.0' eccentricity. Weight of horizontally eccentric load is capped at 100lb, with all remaining weight mounted 2.5' above top of the pole.
3. Custom products, configurations, options, and accessories available.
4. Satisfactory performance of light poles is dependent upon the structure being properly attached to a supporting foundation of adequate design.

"+" indicates a vibration dampener is standard.



SIZES DATA

Standard Model (Anchor Base)	Pole Dimensions					Anchor Base			Anchor Bolts	
	Nominal Mounting Height	Top OD (in)	Base OD (in)	Wall Thick (in)	Structural Weight (lb)	Bolt Circle Diameter On Center (in)	Bolt Square On Center (in)	Square (in) x Thickness (in)	Dia x Length x Hook (in)	Projection (in)
JWD-RSAA-08-40-40-125	8'-0"	4	4	0.125	36	9.25	6.54	8.625 x 0.75	0.63 x 16.00 x 2.00	2.75
JWD-RSAA-08-40-40-188	8'-0"	4	4	0.188	49	9.25	6.54	8.625 x 0.76	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-10-40-40-125	10'-0"	4	4	0.125	39	9.25	6.54	8.625 x 0.77	0.63 x 16.00 x 2.00	2.75
JWD-RSAA-10-40-40-188	10'-0"	4	4	0.188	52	9.25	6.54	8.625 x 0.78	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-10-50-50-188	10'-0"	5	5	0.188	55	8.375 - 10.375	5.92 - 7.34	10.25 x 0.88	0.75 x 17.00 x 3.00	3.50
JWD-RSAA-10-60-60-188	10'-0"	6	6	0.188	60	9.625 - 11.375	6.80 - 8.04	11 x 1	1.00 x 36.00 x 4.00	3.50
JWD-RSAA-12-40-40-125	12'-0"	4	4	0.125	43	9.25	6.54	8.625 x 0.79	0.63 x 16.00 x 2.00	2.75
JWD-RSAA-12-40-40-188	12'-0"	4	4	0.188	56	9.25	6.54	8.625 x 0.80	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-12-50-50-188	12'-0"	5	5	0.188	62	8.375 - 10.375	5.92 - 7.34	10.25 x 0.88	0.75 x 17.00 x 3.00	3.50
JWD-RSAA-12-60-60-188	12'-0"	6	6	0.188	70	9.625 - 11.375	6.80 - 8.04	11 x 1	1.00 x 36.00 x 4.00	3.50
JWD-RSAA-14-40-40-125	14'-0"	4	4	0.125	47	9.25	6.54	8.625 x 0.75	0.63 x 16.00 x 2.00	2.75
JWD-RSAA-14-40-40-188	14'-0"	4	4	0.188	60	9.25	6.54	8.625 x 0.75	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-14-50-50-188	14'-0"	5	5	0.188	69	8.375 - 10.375	5.92 - 7.34	10.25 x 0.88	0.75 x 17.00 x 3.00	3.50
JWD-RSAA-14-60-60-188	14'-0"	6	6	0.188	67	9.625 - 11.375	6.80 - 8.04	11 x 1	1.00 x 36.00 x 4.00	3.50
JWD-RSAA-15-40-40-125	15'-0"	4	4	0.125	49	9.25	6.54	8.625 x 0.77	0.63 x 16.00 x 2.00	2.75
JWD-RSAA-15-40-40-188	15'-0"	4	4	0.188	63	9.25	6.54	8.625 x 0.75	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-15-50-50-188	15'-0"	5	5	0.188	72	8.375 - 10.375	5.92 - 7.34	10.25 x 0.88	0.75 x 17.00 x 3.00	3.50
JWD-RSAA-15-60-60-188	15'-0"	6	6	0.188	73	9.625 - 11.375	6.80 - 8.04	11 x 1	1.00 x 36.00 x 4.00	3.50
JWD-RSAA-16-40-40-125	16'-0"	4	4	0.125	50	9.25	6.54	8.625 x 0.75	0.63 x 16.00 x 2.00	2.75
JWD-RSAA-16-40-40-188	16'-0"	4	4	0.188	65	9.25	6.54	8.625 x 0.75	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-16-50-50-188	16'-0"	5	5	0.188	75	8.375 - 10.375	5.92 - 7.34	10.25 x 0.88	0.75 x 17.00 x 3.00	3.50
JWD-RSAA-16-60-60-188	16'-0"	6	6	0.188	79	9.625 - 11.375	6.80 - 8.04	11 x 1	1.00 x 36.00 x 4.00	3.50
JWD-RSAA-18-40-40-188	18'-0"	4	4	0.188	71	9.25	6.54	8.625 x 0.75	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-18-40-40-250	18'-0"	4	4	0.250	87	9.25	6.54	8.625 x 0.75	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-18-50-50-188	18'-0"	5	5	0.188	82	8.375 - 10.375	5.92 - 7.34	10.25 x 0.88	0.75 x 17.00 x 3.00	3.50
JWD-RSAA-18-50-50-250	18'-0"	5	5	0.250	101	8.375 - 10.375	5.92 - 7.34	10.25 x 0.88	0.75 x 17.00 x 3.00	3.50
JWD-RSAA-18-60-60-188	18'-0"	6	6	0.188	92	9.625 - 11.375	6.80 - 8.04	11 x 1	1.00 x 36.00 x 4.00	3.50
JWD-RSAA-18-60-60-250	18'-0"	6	6	0.250	121	9.625 - 11.375	6.80 - 8.04	11 x 1	1.00 x 36.00 x 4.00	3.50
JWD-RSAA-20-40-40-188	20'-0"	4	4	0.188	76	9.25	6.54	8.625 x 0.75	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-20-40-40-250	20'-0"	4	4	0.250	94	9.25	6.54	8.625 x 0.75	0.75 x 17.00 x 3.00	2.75
JWD-RSAA-20-50-50-188	20'-0"	5	5	0.188	89	8.375 - 10.375	5.92 - 7.34	10.25 x 0.88	0.75 x 17.00 x 3.00	3.50
JWD-RSAA-20-50-50-250	20'-0"	5	5	0.250	111	8.375 - 10.375	5.92 - 7.34	10.25 x 0.88	0.75 x 17.00 x 3.00	3.50
JWD-RSAA-20-60-60-188	20'-0"	6	6	0.188	104	9.625 - 11.375	6.80 - 8.04	11 x 1	1.00 x 36.00 x 4.00	3.50
JWD-RSAA-20-60-60-250	20'-0"	6	6	0.250	131	9.625 - 11.375	6.80 - 8.04	11 x 1	1.00 x 36.00 x 4.00	3.50

1. The total combined Effective Projected Area (EPA) and weight of all fixtures, brackets, and other attachments mounting to a light pole cannot exceed the EPA and weight rating for a specified pole.
2. Standard EPA and weight values are based around 2020 FL Code. Specific light pole design standards are available from Jademar support. Above data is based around the load centroid being at 2.5' above the pole top and with 2.0' eccentricity. Weight of horizontally eccentric load is capped at 100lb, with all remaining weight mounted 2.5' above top of the pole.
3. Custom products, configurations, options, and accessories available.
4. Satisfactory performance of light poles is dependent upon the structure being properly attached to a supporting foundation of adequate design.

"+" indicates a vibration dampener is standard.



SIZES DATA

Standard Model (Direct Burial)	Pole Dimensions							Structural Weight (lb)
	Nominal Mounting Height	Exposed Height	Embedded Length	Overall Length	Top OD (in)	Base OD (in)	Wall Thick (in)	
JWD-RSAD-08-40-40-125	8'-0"	8'-0"	4'-0"	12'-0"	4	4	0.125	23
JWD-RSAD-08-40-40-188	8'-0"	8'-0"	4'-0"	12'-0"	4	4	0.188	35
JWD-RSAD-10-40-40-125	10'-0"	10'-0"	4'-0"	14'-0"	4	4	0.125	27
JWD-RSAD-10-40-40-188	10'-0"	10'-0"	4'-0"	14'-0"	4	4	0.188	42
JWD-RSAD-10-50-50-188	10'-0"	10'-0"	4'-0"	14'-0"	5	5	0.188	44
JWD-RSAD-10-60-60-188	10'-0"	10'-0"	4'-0"	14'-0"	6	6	0.188	80
JWD-RSAD-12-40-40-125	12'-0"	12'-0"	4'-0"	16'-0"	4	4	0.125	31
JWD-RSAD-12-40-40-188	12'-0"	12'-0"	4'-0"	16'-0"	4	4	0.188	49
JWD-RSAD-12-50-50-188	12'-0"	12'-0"	4'-0"	16'-0"	5	5	0.188	52
JWD-RSAD-12-60-60-188	12'-0"	12'-0"	4'-0"	16'-0"	6	6	0.188	92
JWD-RSAD-14-40-40-125	14'-0"	14'-0"	4'-0"	18'-0"	4	4	0.125	34
JWD-RSAD-14-40-40-188	14'-0"	14'-0"	4'-0"	18'-0"	4	4	0.188	55
JWD-RSAD-14-50-50-188	14'-0"	14'-0"	4'-0"	18'-0"	5	5	0.188	59
JWD-RSAD-14-60-60-188	14'-0"	14'-0"	4'-0"	18'-0"	6	6	0.188	105
JWD-RSAD-15-40-40-125	15'-0"	15'-0"	4'-0"	19'-0"	4	4	0.125	40
JWD-RSAD-15-40-40-188	15'-0"	15'-0"	4'-0"	19'-0"	4	4	0.188	60
JWD-RSAD-15-50-50-188	15'-0"	15'-0"	4'-0"	19'-0"	5	5	0.188	65
JWD-RSAD-15-60-60-188	15'-0"	15'-0"	4'-0"	19'-0"	6	6	0.188	78
JWD-RSAD-16-40-40-125	16'-0"	16'-0"	4'-0"	20'-0"	4	4	0.125	55
JWD-RSAD-16-40-40-188	16'-0"	16'-0"	4'-0"	20'-0"	4	4	0.188	61
JWD-RSAD-16-50-50-188	16'-0"	16'-0"	4'-0"	20'-0"	5	5	0.188	69
JWD-RSAD-16-60-60-188	16'-0"	16'-0"	4'-0"	20'-0"	6	6	0.188	123
JWD-RSAD-18-40-40-188	18'-0"	18'-0"	4'-0"	22'-0"	4	4	0.188	70
JWD-RSAD-18-40-40-250	18'-0"	18'-0"	4'-0"	22'-0"	4	4	0.250	74
JWD-RSAD-18-50-50-188	18'-0"	18'-0"	5'-0"	23'-0"	5	5	0.188	80
JWD-RSAD-18-50-50-250	18'-0"	18'-0"	5'-0"	23'-0"	5	5	0.250	103
JWD-RSAD-18-60-60-188	18'-0"	18'-0"	5'-0"	23'-0"	6	6	0.188	95
JWD-RSAD-18-60-60-250	18'-0"	18'-0"	5'-0"	23'-0"	6	6	0.250	125
JWD-RSAD-20-40-40-188	20'-0"	20'-0"	5'-0"	24'-0"	4	4	0.188	87
JWD-RSAD-20-40-40-250	20'-0"	20'-0"	5'-0"	24'-0"	4	4	0.250	109
JWD-RSAD-20-50-50-188	20'-0"	20'-0"	5'-0"	25'-0"	5	5	0.188	143
JWD-RSAD-20-50-50-250	20'-0"	20'-0"	5'-0"	25'-0"	5	5	0.250	118
JWD-RSAD-20-60-60-188	20'-0"	20'-0"	5'-0"	25'-0"	6	6	0.188	126
JWD-RSAD-20-60-60-250	20'-0"	20'-0"	5'-0"	25'-0"	6	6	0.250	154


1. The total combined Effective Projected Area (EPA) and weight of all fixtures, brackets, and other attachments mounting to a light pole cannot exceed the EPA and weight rating for a specified pole.
2. Custom products, configurations, options, and accessories available from factory.
3. Satisfactory performance of light poles is dependent upon the structure being properly attached to a supporting foundation of adequate design.

"+" indicates a vibration dampener is standard




PRODUCT DIMENSIONS


ANCHOR BASE

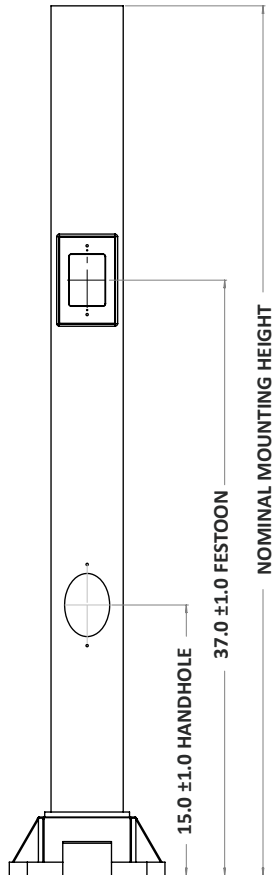


DIRECT BURIAL

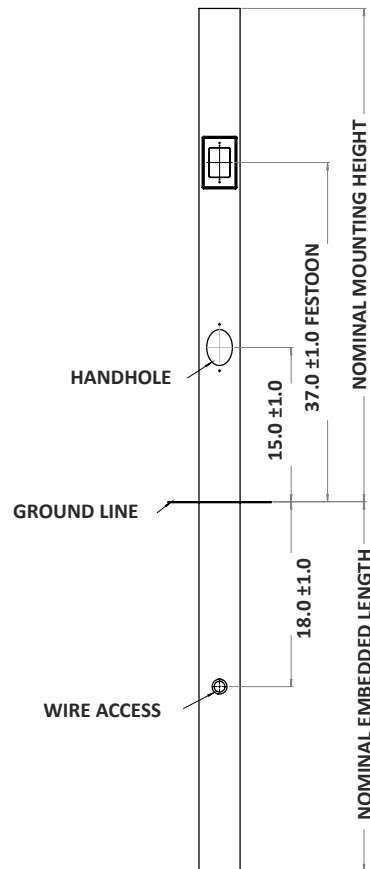


4in Base

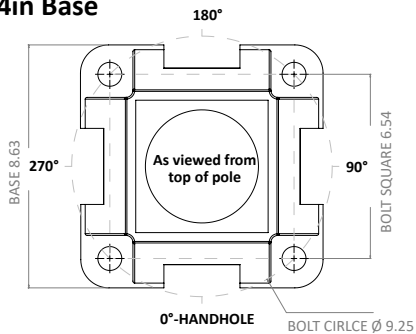

5in Base

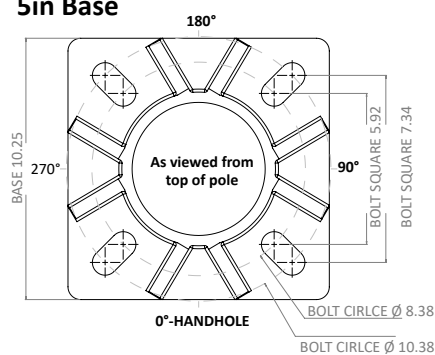


6in Base

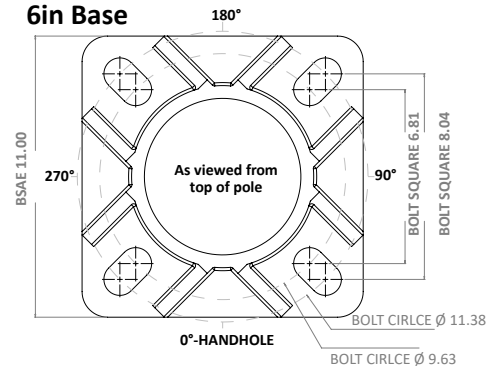

JWD-RS DECORATIVE ROUND STRAIGHT ALUMINUM POLE


JWD-CL1 DECORATIVE CLAMSHELL LIGHT POLE BASE COVER

Weight: 13 lbs

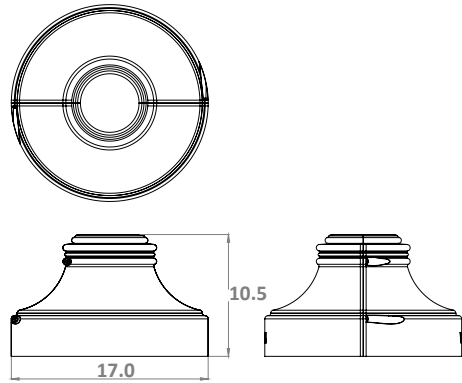


JWD-CL2 DECORATIVE CLAMSHELL LIGHT POLE BASE COVER

Weight: 23 lbs

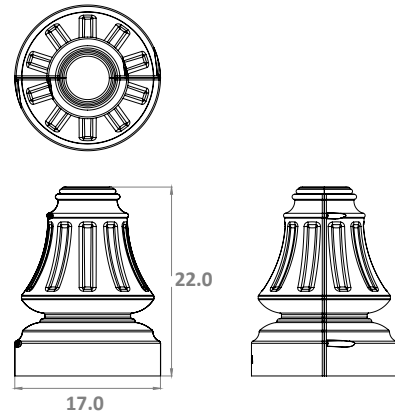


JWD-CL3 DECORATIVE CLAMSHELL LIGHT POLE BASE COVER

Weight: 28 lbs

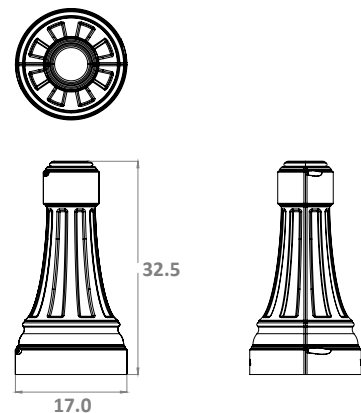


JWD-CLE CLAMSHELL BASE EXTENDER

Weight: 19 lbs

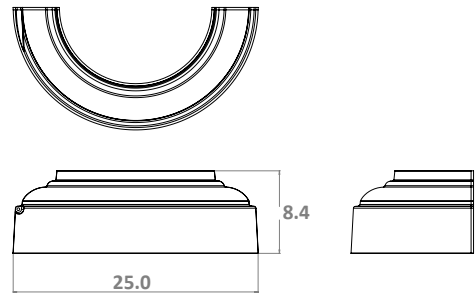


JWD-SC1 SPUN BASE COLLAR (1-PIECE DESIGN)

Weight: 6 lbs

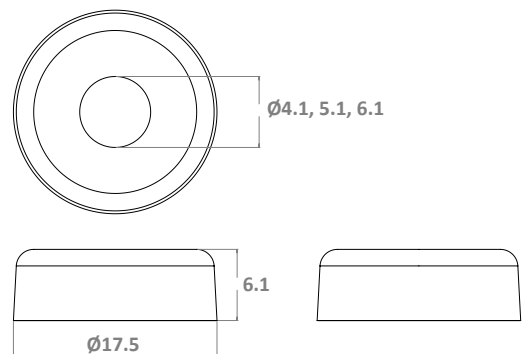


JWD-SC2 SPUN BASE COLLAR (2-PIECE DESIGN)

Weight: 6 lbs

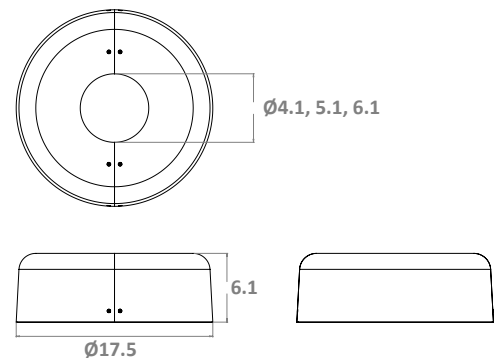


JWD-RS DECORATIVE ROUND STRAIGHT ALUMINUM POLE

BANNER ARMS

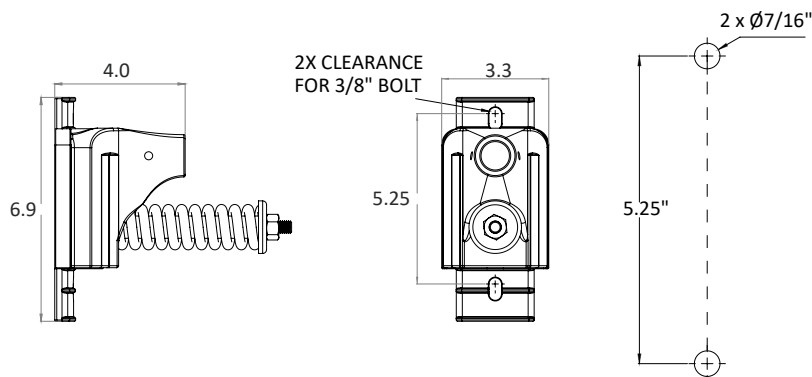


FLAG HOLDER

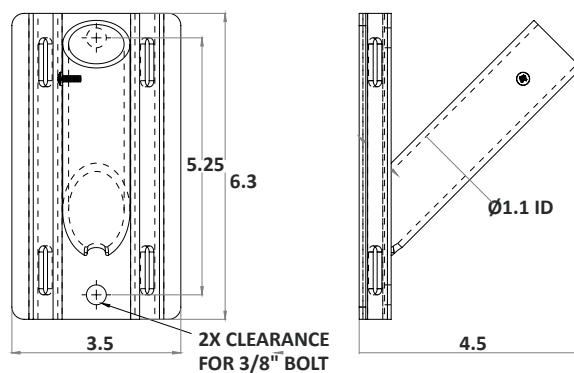

PLANT HOLDER

Note: 75 lbs weight max per plant holder.

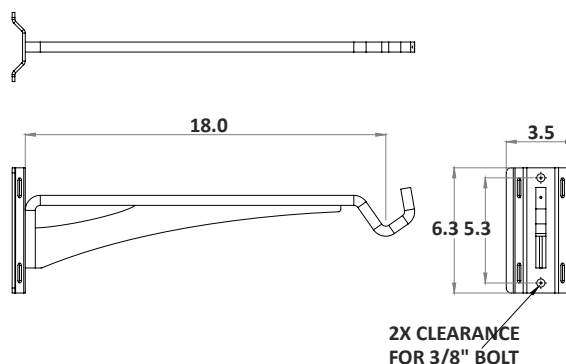

JWD-RS DECORATIVE ROUND STRAIGHT ALUMINUM POLE

ORDERING INFORMATION / Example: **JWD-RSAA-8-40-40-125-AB-SB-FP-BK-PC-BAA**


Product Series	Length	Pole Base OD	Pole Top OD	Wall Thickness	Anchor Bolts	Base Type
JWD-RSAA Round Straight Anchor Base	8 8'	40 4'	40 4'	125 0.125"	AB Includes Anchor Bolts	SB Standard Base
JWD-RSAD Round Straight Direct Burial	10 10'	50 5'	50 5'	188 0.188"	LAB Less Anchor Bolts	CB Custom Base
	12 12'	60 6'	60 6'	250 0.250"	CC Custom (Special Order)*	
	14 14'	CC Custom (Special Order)*	CC Custom (Special Order)*	CC Custom (Special Order)*		
	15 15'					
	16 16'					
	18 18'					
	20 20'					
	CC Custom (Special Order)*					
		* Replace "CC" With a custom Pole Base OD	* Replace "CC" With a custom Pole Top OD	* Replace "CC" With a custom Wall Thickness	* Replace "CC" With a custom Anchor Bolts	
	* Replace "CC" With a custom Length					
Finish Type	Finish Color	Fixture Mounting	Other Options			
FP Finish Painted	BK Black	PC Cap Only, No Side Drilling	Blank Not BAA/BABAA			
AN Anodized	MB Medium Bronze	PL Open Top, No Cap	BAA Buy American Act*			
WG Wood Grain System	DB Dark Bronze	PF Flush Arm Fit	BABAA Build America, Buy America*			
CC Custom (Special Order)*	WH White	D1 Drill Single				
	NA Nat Alum Silver	D2 Drill 2 @180	* Selected SKU'S Only			
	LG Light Gray	D3 Drill 3 @120				
	SG Slate Gray	D4 Drill 4 @90				
	DG Dark Green	D5 Drill 2 @90				
	DP Dark Platinum	D6 Drill 3 @90				
	GM Graphite Metallic	P1 4" OD x 5" Long Tenon				
	BA Bronze Anodized	P2 2.38" OD x 4" Long Tenon				
	BKA Black Anodized	P3 3.50" OD x 6" Long Tenon				
	SA Satin Silver Anodized	P4 4" OD x 6" Long Tenon				
	CC Custom (Special Order)*	P5 2.88" OD x 4" Long Tenon				
		P6 2.88" OD x 5" Long Tenon				
		P7 2.38" OD x 5" Long Tenon				
		PQ 2.38" OD x 12" Long Tenon				
		PD 3" OD x 3" Long Tenon				
		CC Custom (Special Order)*				
		* Replace "CC" with a custom Fixture Mounting				

OPTIONS & ACCESSORIES

Options	Description	Specification Value	Quantity Need
SPL	Special Cut Length (Please Specify)		
BCSPCL	Special Base Plate & Cover to Match Existing Bolt Circle (May Add Production Lead Time)	N/A	
VDA	Internal Vibration Dmpener, Factory Installed	N/A	
HHUR-4/5/6	Additional Unreinforced Handle Hole Opening w/ Cover Assembly (Specify Pole Height & Orientation)		
HHRR-4/5/6	Additional Reinforced Hand Hole Opening w/ Cover Assembly (Specify Pole Height & Orientation)		
FSTR	Festoon Provision, Electrical by Others (Specify Pole Height & Orientation, Minumum 37" Above Base Plate)		
CPL-P-12	1/2" NPT Pipe-Thread Female Coupling (Specify Pole Height & Orientation)		
CPL-P-34	3/4" NPT Pipe-Thread Female Coupling (Specify Pole Height & Orientation)		
CPL-P-1	1" NPT Pipe-Thread Female Coupling (Specify Pole Height & Orientation)		
CPL-S-12	1/2" NPSM Straight-Thread Female Coupling (Specify Pole Height & Orientation)		
CPL-S-34	3/4" NPSM Straight-Thread Female Coupling (Specify Pole Height & Orientation)		
CPL	Custom Coupling (Please Specify)		

Accessories	Description	Quantity Need
MP	Engineering Services, Signed & Sealed Calcs	
APCA	Engineering Services, CA Signed & Sealed Calcs	
063	Pre-Ship Anchor Bolts - 0.625" x 16" x 2"	
075	Pre-Ship Anchor Bolts - 0.75" x 17" x 3"	
100	Pre-Ship Anchor Bolts - 1.0" x 36" x 4"	
DF	Internal Vibration Dampener, Field Installable	
24	24" Wind shedding Banner Arm Kit, for Banners Less than 17.5 sq ft, 24" Fiberglass Arms, Bolt Mounted or Banded to Pole, Finished to Match Pole (Field Installed)	
30	30" Wind shedding Banner Arm Kit, for Banners Less than 17.5 sq ft, 30" Fiberglass Arms, Bolt Mounted or Banded to Pole, Finished to Match Pole (Field Installed)	
H	Single Flag Holder Kit, Stainless Hardware Included (Field Installed)	
H	Single Plant Holder Kit, Stainless Hardware Included (Field Installed)	



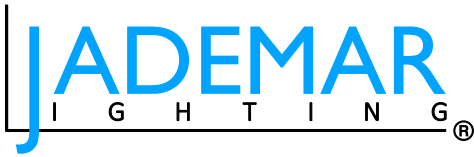

JWD-RS DECORATIVE ROUND STRAIGHT ALUMINUM POLE

JWD DECORATIVE BASE COVERS

ORDERING INFORMATION / Example: **JWD-CL1-4R-BK-40**

JWD				
Product Series	Design	Pole Fit	Finish Color	Other Options
JWD	CL1 Small Clamshell Cast Base Cover CL2 Medium Clamshell Cast Base Cover CL3 Large Clamshell Cast Base Cover SC1 Spun Base Collar (1pc Design) SC2 Spun Base Collar (Split Design) CC Custom (Special Order)* * Replace "CC" With a custom Design	4R 4" OD Round Light Pole 5R 5" OD Round Light Pole 6R 6" OD Round Light Pole 4S 4" OD Square Light Pole CC Custom (Special Order)* * Replace "CC" With a custom Pole Fit	BK Black MB Medium Bronze DB Dark Bronze WH White NA Nat Alum Silver LG Light Gray SG Slate Gray DG Dark Green DP Dark Green GM Graphite Metallic CC Custom (Special Order)* * Replace "CC" with a custom RAL Code	Blank Not BAA/BABAA BAA Buy American Act* BABAA Build America, Buy America* * Selected SKU'S Only

OPTIONS & ACCESSORIES

Options	-	Description	-	Quantity Need
JWD-CLE	-	Clamshell Base Extender (Case Base Covers Only)	-	



Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM

