

ANT-1P-4T-BLE-SR | PIR Bi-level Dimming Occupancy Sensor


SPECIFICATION

ANT-1P-4T-BLE-SR Bluetooth Fixture Sensor is designed for indoor applications with ceilings such as office, school. Integrated sensors capture data that is both processed locally and transmitted over the network, enabling a full suite of applications. In addition, the sensor supports Bluetooth® Low Energy communication with tags and other BLE devices.



OVERVIEW

The Bluetooth Fixture Sensor is a complete sensing and lighting control node powered from its attached light fixture. Sensor information combined with a configurable behavior profile makes the fixture Sensor an integral component of an intelligent lighting control and sensing solution. With integrated wireless communications for data transmission and remote configuration as well as autonomous fixture-level control, this sensor brings advanced lighting automation to a whole new level.



FEATURES AND BENEFITS

Fixture Sensor DLC: Meet DLC 5.2 Networked Lighting Control System

Localized Lighting Control: Light-level schedules, preferences, and profiles for each fixture are wirelessly communicated at system setup and stored for continuous operation.


Bluetooth Low Energy: An embedded BLE radio allows the sensor to receive and transmit beacons as well as support communication with lighting control devices and other sensors.

Occupancy/Vancacy/Manual: A digital Passive Infrared (PIR) sensor combined with ambient with 3 difference modes as options.

Daylight Harvesting: Captured ambient light information is locally processed to raise and lower light levels based on available daylight.

Room and Zone Control: Pairs with room switches for code-compliant manual-on or auto-off capability. Sensors can be grouped into zones that share occupancy sensing data and coordinate light control based on detected motion.

OCCUPANCY DETECTION OVERLAP

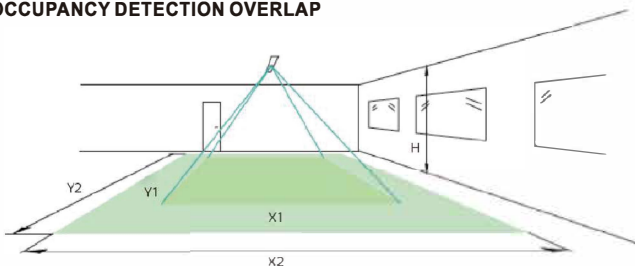

Height

H

8'2.4m

10'3m

Minor Movement

Y1

10'2.9m

12'3.6m

X1

9'2.7m

11'3.4m

Major Movement

Y2

15'4.5m

18'5.4m

X2

9'2.9m

12'3.6m

Note: Longer dimension of detection area (Y1, Y2) is parallel to longer dimension



TECHNICAL DATA

Motion Sensing	Passive IR
Input Power	12-24VDC,>50mA
Control Output	0-10V,max 25mA sinking current
Mounting height	12ft Max.
Detection angle	360°
Operating temperature	-20°C~60°C
IP rating	20
Wireless Standards	5.0 Bluetooth Mesh

ORDERING INFORMATION

ANT-1P-4T-BLE Bluetooth Fixture Sensor

COMPLIANCE

Europe  RoHS  

United States  

Canada 

