



JACDL ARCHITECTURAL CIRCULAR LUMINAIRE DOWN/INWARD/OUTWARD/TWIST PENDANT GALAXY SERIES / TATOONIE

LIMITLESS CURVE LIGHTING: JACDL stylish lighting system, through the sublimation from straight line to curve, transformation from 2D to 3D, linear lighting is brought with a brand-new revolutionary experience.

The basic modules can constitute standard circular luminaires with the diameter of 32" & 59" for independent application. Multiple light emitting directions are: lighting upward, downward, outward and inward. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres.

- Circular luminaires with different lighting directions;
- High quality surface treatment, three optional colors of black, white and silver;
- Adopt silicone flexible diffuser, producing homogeneous & soft lighting;
- Pendant cable and wire in one, beautiful overall effect;
- Two installation ways: pendant and surface mounted;
- Conductive Suspension Kit - Invisible Power Cord Standard
- External Driver
- 95 CRI Optional
- Standard White/Silver/Black Frame Options
- Warranty - 10 Years



Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Values are nominal.
Revised 05/2022

SPECIFICATION SUBMITTAL DETAIL

Project Name/Type:		Date:
Catalog/Part #:		

JACDL Architectural Circular Luminaire Down/Inward/Outward/TwistPendant Galaxy Series / Tatoonie

Ordering Information: **JACDL-59-100W-IN-27K-95-JICS-BT-SC-WH-SUK8-EM15**


Product Series	Light Distribution	Input Voltage	CCT	CRI	Controls	Frame Color	Mounting
JACDL-32-50W	DL (Downlight)	Blank (100-277VAC)	19K (1900K) 23K (2300K) 27K (2700K) 30K (3000K) 35K (3500K) 50K (5000K) 40K (4000K)	Blank (80 CRI) Standard	JICS-BT-SC (Bluetooth Controller)	WH (White) Standard	SUK5 (Suspended Aircraft Cable 5FT)
JACDL-59-90W	DL (Downlight) T90L (Twist 90°Left) T90R (Twist 90°Right) T180 (Twist 180°)		95 (95 CRI)	SV (Silver) BK (Black)		SUK8 (Suspended Aircraft Cable 8FT)	
JACDL-59-100W	IN (Inward Light) OU (Outward Light)						

FIELD INSTALLED OPTIONS

EM15	Field Installed Self Diagnostic EM Pack 15W
EM8	Field Installed Self Diagnostic EM Pack 8W

PERFORMANCE SUMMARY AND ELECTRICAL DATA

Product Series	Size	Wattage	Input Voltage	CCT	Flux (Lms)	CRI	Beam Angle	Dimming	Power Factor
JACDL-32-50W-DL	Ø32"	50W	100-277VAC	1900K	2100	>80	120°	0-10V Dimming	>0.5
JACDL-59-90W-DL	Ø59"	90W		2300K	3300				
JACDL-59-90W-T90L	Ø59"	90W		2700K	3300				
JACDL-59-90W-T90R	Ø59"	90W		3000K	3300				
JACDL-59-90W-T180	Ø59"	90W		3500K	3300				
JACDL-59-100W-IN	Ø59"	100W		4000K	3300				
JACDL-59-100W-OU	Ø59"	100W		5000K	3700				
			6000K	3700					

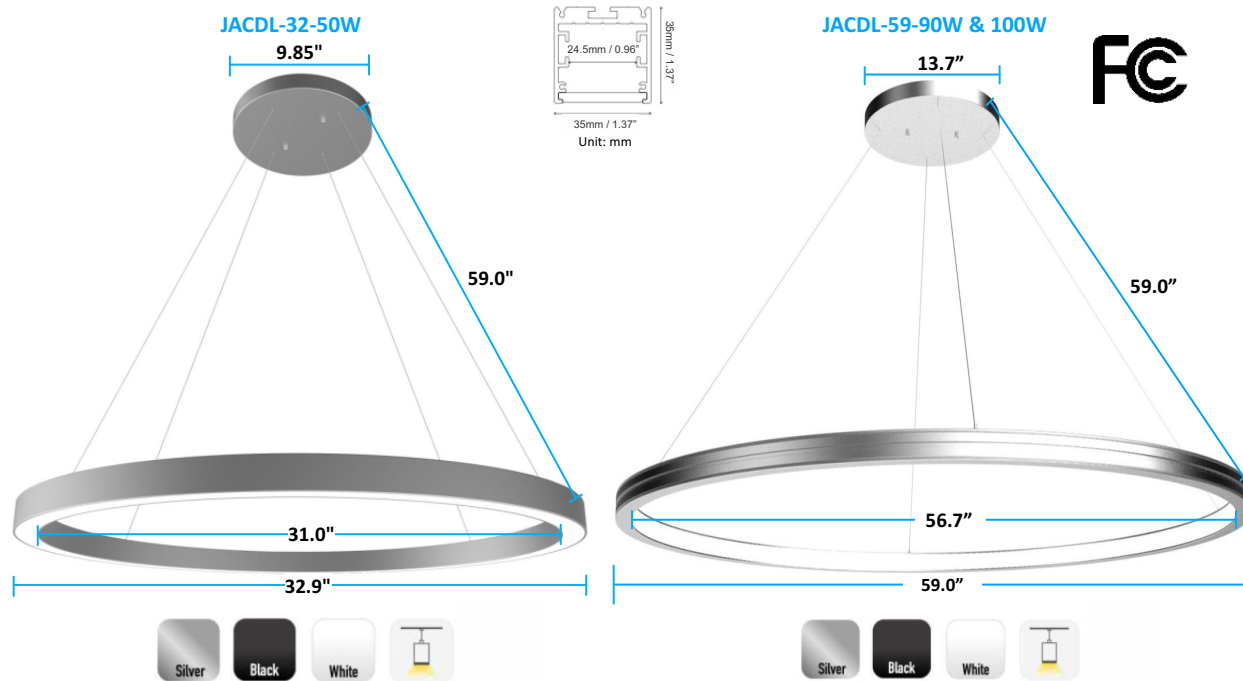

NOTE: Driver is remote inside the canopy
Conductive Suspension Kit - Invisible Power Cord Standard

