






## JACUDO ARCHITECTURAL CIRCULAR PENDANT LUMINAIRE UP/DOWN, IN/OUT, INWARD/OUTWARD LIGHT

**LIMITLESS CURVE LIGHTING:** JACUDO stylish lighting system, through the sublimation from straight line to curve, transformation from 2D to 3D, linear lighting is brought with a brand-new revolutionary experience.

The basic modules can constitute standard circular luminaires with the diameter of 39" & 59" for independent application. Multiple light emitting directions are: lighting upward, downward, outward and inward. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres.

- Circular luminaires with different lighting directions
- High quality surface treatment, three optional colors of black, white and silver
- Adopt silicone flexible diffuser, producing homogeneous & soft lighting
- Pendant cable and wire in one, beautiful overall effect
- Two installation ways: pendant and surface mounted
- Conductive Suspension Kit - Invisible Power Cord Standard
- External Driver
- 95 CRI Optional
- Standard White/Silver/Black Frame Options
- Warranty - 10 Years

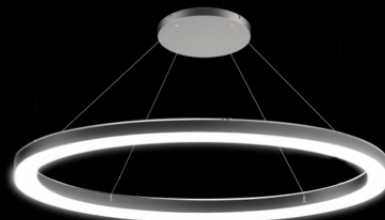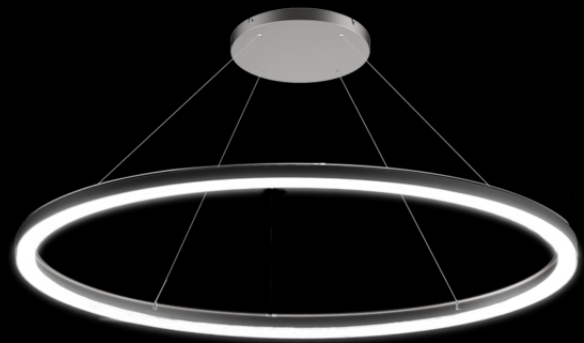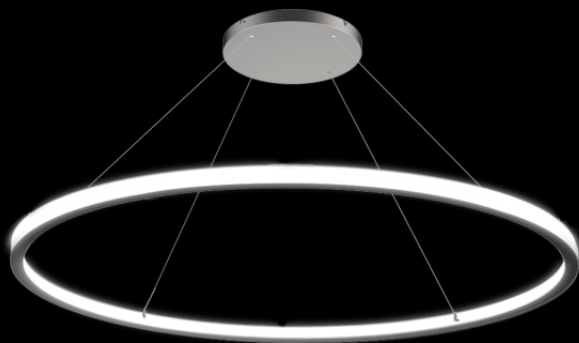


Miami, FL USA - [info@jademar.com](mailto:info@jademar.com)  
T: 305.640.0465 - F: 305.640.0468  
[WWW.JADEMAR.COM](http://WWW.JADEMAR.COM)



Information contained herein is subject to change without notice.  
Values are nominal.  
Revised 05/2022

# SPECIFICATION SUBMITTAL DETAIL

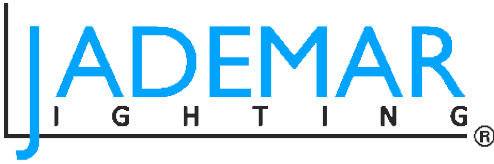

Project Name/Type:		Date:
Catalog/Part #:		

## JACUDO Architectural Circular Luminaire Uplight/Downlight/Inward/Outward Light Pendant

Ordering Information: **JACUDO-39-120W-UP-27K-95-JICS-BT-SC-WH-SUK8-EM15**



Product Series	Light Distribution	Input Voltage	CCT	Dimming	CRI	Controls	Frame Color	Mounting
JACUDO-39-120W	UD (Up & Downlight)	Blank (100-277VAC)	19K (1900K)	D (0-10V Dimming)	Blank (80 CRI) Standard	JICS-BT-SC (Bluetooth Controller)	WH (White) Standard	SUK5 (Suspended Aircraft Cable 5FT)
JACUDO-59-180W			23K (2300K)					27K (2700K)
JACUDO-59-210W	IO (Inward & Outward Light) IN (Inward Light) OU (Outward Light)						BK (Black)	

### FIELD INSTALLED OPTIONS


EM8	Field Installed Self Diagnostic EM Pack 8W
EM15	Field Installed Self Diagnostic EM Pack 15W

### PERFORMANCE AND ELECTRICAL DATA

Product Series	Size	Wattage	Input Voltage	CCT	Flux (lm)	CRI	Beam Angle	Dimming	Power Factor
JACUDO-39-120W-UD	Ø39"	120W	100-277VAC	1900K	6,100 (50% up 50% Down)	>80	120°	0-10V Dimming	>0.5
JACUDO-59-180W-UD	Ø59"	180W		2300K	7,100 (50% up 50% Down)				
JACUDO-59-210W-IO	Ø59"	210W		2700K	8,200 (50% up 50% Down)				
JACUDO-59-210W-IN	Ø59"	210W		3000K	8,200 (Inward)				
JACUDO-59-210W-OU	Ø59"	210W		3500K	8,200 (Outward)				
				4000K					
			5000K						
			6000K						

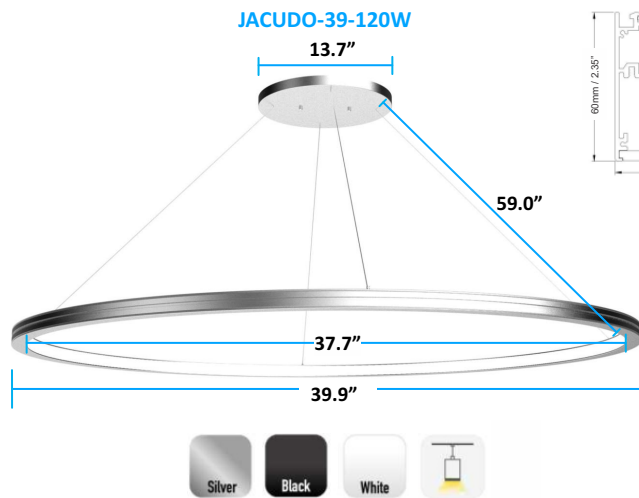

JACUDO-59-180W & 210W

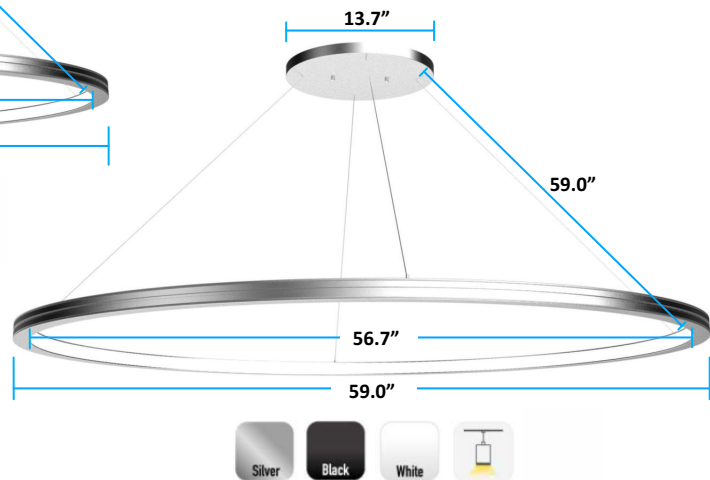

NOTE: Driver is remote inside the canopy  
Conductive Suspension Kit - Invisible Power Cord Standard



Miami, FL USA - info@jademar.com  
T: 305.640.0465 - F: 305.640.0468  
**WWW.JADEMAR.COM**



Information contained herein is subject to change without notice.  
Values are nominal.  
Revised 05/2022