




# JADEMAR

I G H T I N G®

## JADIL-SL SERIES

ARCHITECTURAL SLIM LINEAR DIRECT/INDIRECT  
CCT SELECTABLE SINGLE RUN AND SEAMLESS  
CONTINUOUS RUN UP TO 82' LUMINAIRE

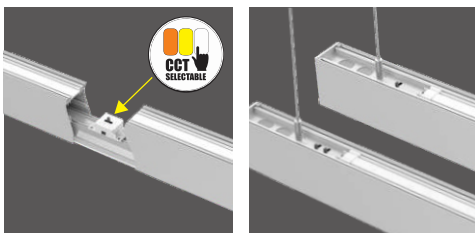

**Bluetooth™**  
**CONTROLS READY**




Quotations: [quotes@jademar.com](mailto:quotes@jademar.com)  
To place an order: [orders@jademar.com](mailto:orders@jademar.com)  
Tel: (305) 640.0465 | Fax: (305) 640.0468  
**WWW.JADEMAR.COM**



Jademar Lighting has prepared the information contained in this document with due care. However, Jademar Lighting does not warrant or represent that the information is free from errors or omission. While the information is considered to be true and correct at the date of publication, changes in circumstances after that date may impact on its accuracy. The information may change without notice and Jademar Lighting is not liable for the accuracy of any information printed and stored or interpreted or used.

Revised 08/2026

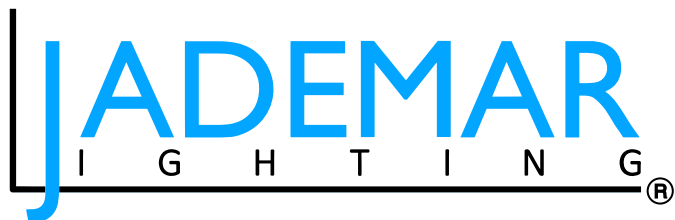

## JADIL-SL SERIES

### ARCHITECTURAL SLIM DESIGN

### DIRECT/INDIRECT CCT SELECTABLE

### SINGLE RUN AND SEAMLESS CONTINUOUS RUN UP TO 82' LUMINAIRE


#### PRODUCT DESCRIPTION

The Jademar JADIL-SL-CS Series of luminaires is versatile and beautiful, with flexible mounting options for pendant, ceiling, wall, or recessed installation. It can be installed as single run, continuous run, or pattern luminaires. CCT Selectable options offer a wide range of lumen packages, color choices, electrical, and control options.

Extruded aluminum body has a stylish outline and is compatible with architectural aesthetics. It serves as a decorative element and provides light for interior applications. The unibody construction prevents bending, sagging, or light leakage. Low glare-free 16 UGR light is provided by innovative optical technology with a conical micro-prism diffuser. Direct and indirect light types are available, with direct lights serving workstations and indirect lights enhancing uniformity in the task area.

#### FEATURES

- **Connectors:** Seamless L, T, V, X and Y shapes continuous connection with state of the art auto-tuning connectors adjust to the light level and CCT from the leader module
- **CCT Options:** CCT Selectable (3500K/4000K/5000K) standard, 2700K, 3000K, TW-BT (Tunable White 2700K-6500K) and RGB as special order options
- **Aluminum housing**
- **Dimming & Controls:** 0-10V Dimming driver dim down to 5% - Suggested dimming controllers Lutron and Leviton brands / Microwave sensor, Standalone occupancy sensor, 1% Dimming (Max: 98W) and wireless system are optional
- **Emergency:** Emergency Battery Backup Available
- **Mounting Options:** Pendant, Ceiling/Surface, Wall, or Recessed Mount Installation; Uplight/ Downlight option for Suspended or Wall Mount / Suspended Option employs standard cables and can be connected end to end
- **Profile Color Options:** Silver, Black or White powder coated matte finish housing color to complement every design and decor
- **Seamless Continuous Run:** Up to 82 feet

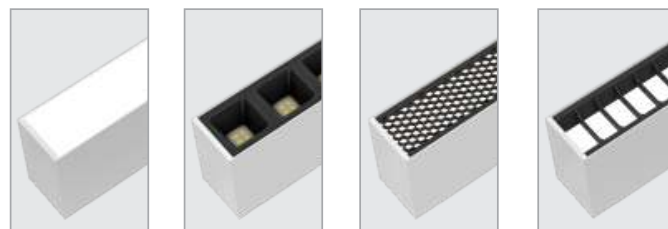


Flat Diffused Lens    Louvered Lens    Honeycomb Lens    Baffle Lens



#### SPECIFICATIONS

|                        |                                                                                                    |
|------------------------|----------------------------------------------------------------------------------------------------|
| Available Lengths:     | 24", 48", 72" and 96"                                                                              |
| Profile Color Options: | White, Black and Silver (Powder coated matte finish)                                               |
| Nominal Efficacy:      | 130 lm/W                                                                                           |
| CCT Options:           | Selectable: 3500K / 4000K / 5000K<br>Static: 2700K and 3000K<br>Tunable White: 2700K-6500K and RGB |
| CRI Options:           | >80 and >90 Optional (Special Order)                                                               |
| Input Voltage:         | CC 120-277VAC Internal driver                                                                      |
| THD                    | <15%                                                                                               |
| Ambient Temperature:   | -35°C to 45°C (-31°F to 113°F)                                                                     |
| Ingress Protection     | IP20 for Damp Locations                                                                            |
| Lifetime (Tc=55°C):    | L70 >147,000 Hrs / L80 >92,000 Hrs / L90 >60,000 Hrs                                               |
| Warranty:              | 10 Years Limited                                                                                   |

#### MOUNTING OPTIONS

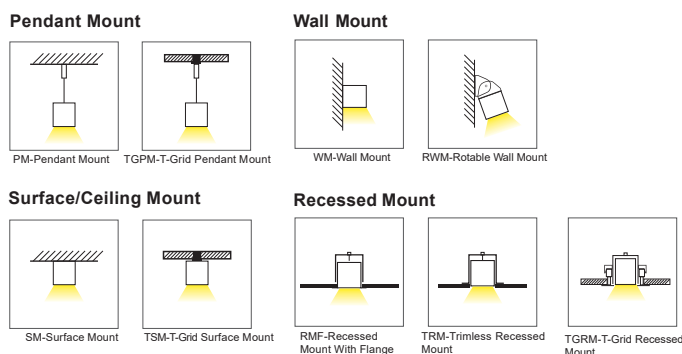


Quotations: [quotes@jademar.com](mailto:quotes@jademar.com)  
To place an order: [orders@jademar.com](mailto:orders@jademar.com)  
Tel: (305) 640.0465 | Fax: (305) 640.0468  
**WWW.JADEMAR.COM**



Jademar Lighting has prepared the information contained in this document with due care. However, Jademar Lighting does not warrant or represent that the information is free from errors or omission. While the information is considered to be true and correct at the date of publication, changes in circumstances after that date may impact on its accuracy. The information may change without notice and Jademar Lighting is not liable for the accuracy of any information printed and stored or interpreted or used.

Revised 08/2026

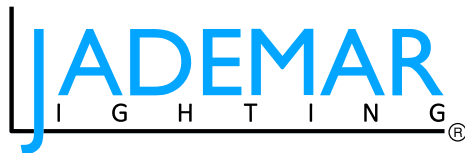

## SPECIFICATION SUBMITTAL DETAIL

|                    |  |       |
|--------------------|--|-------|
| Project Name/Type: |  | Date: |
| Catalog/Part #:    |  |       |

### JADIL-SL SERIES 24", 48", 72" & 96" ARCHITECTURAL SLIM DESIGN DIRECT/INDIRECT CCT SELECTABLE, LINEAR LUMINAIRE SINGLE RUN Ordering Information / Example: JADIL-SL-DI-S4-40W-7030-CS-FL-D-BMWO-DH-WH-PMK4-WH-2C-EM8

| JADIL-SL           | Light Distribution | Length - Wattage                                                     | Indirect/Direct Ratio                                                                                                            | Input Voltage                           | CCT                                                                                             | Lens Type                                                                                              | CRI                                  | Dimming                                                                                                                                    |
|--------------------|--------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| JADIL-SL           | D Direct           | S2-15W 24"-15W<br>S4-30W 48"-30W<br>S6-45W 72"-45W<br>S8-60W 96"-60W |                                                                                                                                  | Blank 120-277V (Standard)<br>H 277-480V | CS Selectable 30K/35K/40K<br>27K Static 27K<br>TW Tunable White 27K-65K<br>RGB Red, Blue, Green | FL Flat Diffused Lens<br>LL Louver Lens<br>ASY Wall Wash/Grazer<br>HL Honeycomb Lens<br>BL Baffle Lens | Blank 80 CRI (Standard)<br>90 90 CRI | D 0-10V Internal Dimming Driver (Standard)<br>2CHD 2 Channel Driver (Unavailable for CCT selectable)<br>DALI Dali<br>1PD 1% Dimming Driver |
| DI Direct/Indirect |                    | S2-20W 24"-20W<br>S4-40W 48"-40W<br>S6-60W 72"-60W<br>S8-80W 96"-80W | 7030 I-70% / D-30%<br>6040 I-60% / D-40%<br>5050 I-50% / D-50%<br>4060 I-40% / D-60%<br>3070 I-30% / D-70%<br>0100 I-0% / D-100% |                                         |                                                                                                 |                                                                                                        |                                      |                                                                                                                                            |

\* Special order features may cost more and may come extend lead times.

\* Max 98W

Specify the set CCT on the order (Example: Set CCT @ 2700K)

| Controls Options                                                                                                                                                                            | Profile Color                                                                | Mounting Kit Options                                                                                                                                                                                                                                                                                                                                                                                                                          | Wiring Options                                                                                                                                                             | Other Options                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BMWO-DH Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Daylight Harvesting Sensor) | WH White<br>BK Black<br>SV Silver<br>CC Custom profile<br>* Input RAL number | PMK-4-xx 4FT Pendant Mount Kit<br>CMK-2 2FT Ceiling/Surface Mount Kit<br>RMK-2 2FT Trimless Recessed Mount Kit<br>TRMK-2 2FT T-Grid Recessed Mount Kit<br>RFMK-2 2FT Recessed With Flange Mount Kit<br>WMK-2 2FT Wall Mount Kit<br>RWMK-2 2FT Rotatable Wall Mount Kit<br>PMK-TC15/16-4 4FTT-Grid Pendant Mount Kit for 9/16"<br>TSMK-TC9/16-4 4FTT-Grid Surface Mount Kit for 9/16"<br>TSMK-TC15/16-4 4FTT-Grid Surface Mount Kit for 15/16" | 2C 2 Circuits/2 Drivers for Static CCT Only<br>2CHD 2 Channel Driver for Static CCT Only<br>DWS Dedicated power feed (Generator/UPS) in an emergency only<br>downlight lit | Blank Not BAA/BABA<br>EM8 Factory Installed 8W EM Pack (90 Minutes) 4FT<br>EM15 Factory Installed 15W EM Pack (90 Minutes) 4FT<br>BAA Buy American Act<br>BABA Build America, Buy America |

\* xx represents canopy color (Specify: WH / BK / SV)  
\* 4FT is standard (Replace the 4 with the desired length if different)

#### FIELD INSTALLED OPTIONS

|         |                                                  |
|---------|--------------------------------------------------|
| BMWO-RC | Remote Control For Bi-Level Microwave Occ Sensor |
| EM8     | Self-Diagnostic Li-Ion EM pack 8W, 90 minutes    |
| EM15    | Self-Diagnostic Li-Ion EM pack 15W, 90 minutes   |

#### SINGLE RUN

[1] 24", 48" 72", or 96" Single Run Module  
(for Continuous Run options, see the following pages)

#### LUMEN PERFORMANCE AND ELECTRICAL DATA

| Model Number            | JADIL-SL-DI-S2-15W       |       |      |        |      |       |      | JADIL-SL-DI-S4-30W       |      |      |      |      |      |      |
|-------------------------|--------------------------|-------|------|--------|------|-------|------|--------------------------|------|------|------|------|------|------|
| Size                    | 2FT (24" x 2.87 x 1.77") |       |      |        |      |       |      | 4FT (48" x 2.87 x 1.77") |      |      |      |      |      |      |
| Light Distribution      | DIRECT                   |       |      |        |      |       |      | DIRECT                   |      |      |      |      |      |      |
| Selectable Lumen Output | A                        | B     | C    | D      | E    | F     | G    | A                        | B    | C    | D    | E    | F    | G    |
|                         | 100%                     | 70%   | 60%  | 50%    | 40%  | 30%   | 0%   | 100%                     | 70%  | 60%  | 50%  | 40%  | 30%  | 0%   |
|                         | 15W                      | 10.5W | 9W   | 7.85W  | 6W   | 4.5W  | 0W   | 30W                      | 21W  | 18W  | 15W  | 12W  | 9W   | 0W   |
|                         | 1950                     | 1365  | 1170 | 1020.5 | 780  | 585   | OFF  | 3900                     | 2730 | 2340 | 1950 | 1560 | 1170 | OFF  |
| Model Number            | JADIL-SL-D-S6-45W        |       |      |        |      |       |      | JADIL-SL-D-S8-60W        |      |      |      |      |      |      |
| Size                    | 6FT (72" x 2.87 x 1.77") |       |      |        |      |       |      | 8FT (96" x 2.87 x 1.77") |      |      |      |      |      |      |
| Light Distribution      | DIRECT                   |       |      |        |      |       |      | DIRECT                   |      |      |      |      |      |      |
| Selectable Lumen Output | A                        | B     | C    | D      | E    | F     | G    | A                        | B    | C    | D    | E    | F    | G    |
|                         | 100%                     | 70%   | 60%  | 50%    | 40%  | 30%   | 0%   | 100%                     | 70%  | 60%  | 50%  | 40%  | 30%  | 0%   |
|                         | 45W                      | 31.5W | 27W  | 22.5W  | 18W  | 13.5W | 0W   | 60W                      | 42W  | 36W  | 30W  | 24W  | 18W  | 0W   |
|                         | 5850                     | 4095  | 3510 | 2925   | 2340 | 1755  | OFF  | 7800                     | 5460 | 4680 | 3900 | 3120 | 2340 | OFF  |
| Model Number            | JADIL-SL-DI-S2-20W       |       |      |        |      |       |      | JADIL-SL-DI-S4-40W       |      |      |      |      |      |      |
| Size                    | 2FT (24" x 2.87 x 1.77") |       |      |        |      |       |      | 4FT (48" x 2.87 x 1.77") |      |      |      |      |      |      |
| Light Distribution      | DIRECT/INDIRECT          |       |      |        |      |       |      | DIRECT/INDIRECT          |      |      |      |      |      |      |
| Lumen %                 | A                        | B     | C    | D      | E    | F     | G    | A                        | B    | C    | D    | E    | F    | G    |
|                         | 100%                     | 0%    | 70%  | 30%    | 60%  | 40%   | 50%  | 100%                     | 0%   | 70%  | 30%  | 60%  | 40%  | 50%  |
| Lumen Output            | 1950                     | OFF   | 1820 | 780    | 1560 | 1040  | 1300 | 3900                     | OFF  | 3640 | 1560 | 3120 | 2080 | 2600 |
|                         | 1950                     | OFF   | 1820 | 780    | 1560 | 1040  | 1300 | 3900                     | OFF  | 3640 | 1560 | 3120 | 2080 | 2600 |
| Model Number            | JADIL-SL-DI-S6-60W       |       |      |        |      |       |      | JADIL-SL-DI-S8-80W       |      |      |      |      |      |      |
| Size                    | 6FT (72" x 2.87 x 1.77") |       |      |        |      |       |      | 8FT (96" x 2.87 x 1.77") |      |      |      |      |      |      |
| Light Distribution      | DIRECT/INDIRECT          |       |      |        |      |       |      | DIRECT/INDIRECT          |      |      |      |      |      |      |
| Lumen %                 | A                        | B     | C    | D      | E    | F     | G    | A                        | B    | C    | D    | E    | F    | G    |
|                         | 100%                     | 0%    | 70%  | 30%    | 60%  | 40%   | 50%  | 100%                     | 0%   | 70%  | 30%  | 60%  | 40%  | 50%  |
| Lumen Output            | 5850                     | OFF   | 5460 | 2340   | 4680 | 3120  | 3900 | 7800                     | OFF  | 7280 | 3120 | 6240 | 4160 | 5200 |
|                         | 5850                     | OFF   | 5460 | 2340   | 4680 | 3120  | 3900 | 7800                     | OFF  | 7280 | 3120 | 6240 | 4160 | 5200 |




Quotations: quotes@jademar.com  
To place an order: orders@jademar.com  
Tel: (305) 640.0465 | Fax: (305) 640.0468  
[WWW.JADEMAR.COM](http://WWW.JADEMAR.COM)



Jademar Lighting has prepared the information contained in this document with due care. However, Jademar Lighting does not warrant or represent that the information is free from errors or omission. While the information is considered to be true and correct at the date of publication, changes in circumstances after that date may impact on its accuracy. The information may change without notice and Jademar Lighting is not liable for the accuracy of any information printed and stored or interpreted or used.

Revised 08/2026



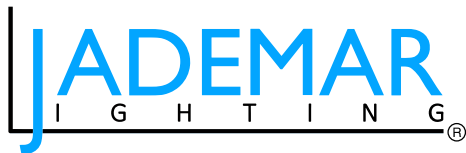

## SPECIFICATION SUBMITTAL DETAIL

|                    |  |       |
|--------------------|--|-------|
| Project Name/Type: |  | Date: |
| Catalog/Part #:    |  |       |

### JADIL-SL SERIES 24", 48", 72" & 96" ARCHITECTURAL SLIM DESIGN DIRECT/INDIRECT CCT SELECTABLE, LINEAR LUMINAIRE CONTINUOUS RUN Ordering Information / Example: JADIL-SL-DI-C4-40W-7030-CS-FL-D-BMWO-DH-ST-WH-PMK4-WH-PMK4-WH-2C-EM8

| Product Series     | Light Distribution | Length - Wattage                                                     | Indirect/Direct Ratio                                                                                                            | Input Voltage                           | CCT                                                                                             | Lens Type                                                                                              | CRI                                  | Dimming                                                                                                                                    | Controls Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------|--------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| JADIL-SL           | D Direct           | C2-15W 24"-15W<br>C4-30W 48"-30W<br>C6-45W 72"-45W<br>C8-60W 96"-60W |                                                                                                                                  | Blank 120-277V (Standard)<br>H 277-480V | CS Selectable 35K/40K/50K<br>27K Static 27K<br>TW Tunable White 27K-65K<br>RGB Red, Blue, Green | FL Flat Diffused Lens<br>LL Louver Lens<br>ASY Wall Wash/Grazer<br>HL Honeycomb Lens<br>BL Baffle Lens | Blank 80 CRI (Standard)<br>90 90 CRI | D 0-10V Internal Dimming Driver (Standard)<br>2CHD 2 Channel Driver (Unavailable for CCT Selectable)<br>DALI DALI<br>1PD 1% Dimming Driver | BMWO-DH Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Daylight Harvesting Sensor)<br>BMWO-BT-SA Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Bluetooth Controller w/Smart App)<br>SR-NLC-MWS Silvalir Microwave Sensor Integral Magnet Mount<br>CB-NLC-MWS Casambi Microwave Sensor Integral Magnet Mount<br>BN-NLC-MWS Bubblynet Microwave Sensor Integral Magnet Mount<br>SR-NLC-FC Silvalir Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input<br>CB-NLC-FC Casambi Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input<br>BN-NLC-FC Bubblynet Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input |
| DI Direct/Indirect |                    | C2-20W 24"-20W<br>C4-40W 48"-40W<br>C6-60W 72"-60W<br>C8-80W 96"-80W | 7030 1-70% / D-30%<br>6040 1-60% / D-40%<br>5050 1-50% / D-50%<br>4060 1-40% / D-60%<br>3070 1-30% / D-70%<br>0100 1-0% / D-100% |                                         |                                                                                                 |                                                                                                        |                                      |                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

Specify the Ratio for Direct/Indirect Models

Specify the set CCT on the order (Example: Set CCT @ 2700K)

| Module Type       | Profile Color     | Starter Module Mounting Options                        | Middle/End Modules Mounting Options                    | Wiring Options                                                | Other Options                                       |
|-------------------|-------------------|--------------------------------------------------------|--------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------|
| ST Starter Module | WH White          | PMK-4 4FT Pendant Mount Kit                            | PMK-4 4FT Pendant Mount Kit                            | 2C 2 Circuits/2 Drivers for Static CCT Only                   | Blank Not BAA/BABA                                  |
| MD Middle Module  | BK Black          | CMK-2 2FT Ceiling/Surface Mount Kit                    | CMK-2 2FT Ceiling/Surface Mount Kit                    | 2CHD 2 Channel Driver for Static CCT Only                     | EM8 Factory Installed 8W EM Pack (90 Minutes) 4FT   |
| EN End Module     | SV Silver         | RMK-2 2FT Trimless Recessed Mount Kit                  | RMK-2 2FT Trimless Recessed Mount Kit                  | DWS Dedicated power feed (Generator/UPS) in an emergency only | EM15 Factory Installed 15W EM Pack (90 Minutes) 4FT |
|                   | CC Custom Profile | TRMK-2 2FT T-Grid Recessed Mount Kit                   | TRMK-2 2FT T-Grid Recessed Mount Kit                   |                                                               | BAA Buy American Act                                |
|                   |                   | RFMK-2 2FT Recessed With Flange Mount Kit              | RFMK-2 2FT Recessed With Flange Mount Kit              |                                                               | BABA Build America                                  |
|                   |                   | WMK-2 2FT Wall Mount Kit                               | WMK-2 2FT Wall Mount Kit                               |                                                               |                                                     |
|                   |                   | RWMK-2 2FT Rotatable Wall Mount Kit                    | RWMK-2 2FT Rotatable Wall Mount Kit                    |                                                               |                                                     |
|                   |                   | PMK-TC9 4FT T-Grid Pendant Mount Kit for 9/16"         | PMK-TC9 4FT T-Grid Pendant Mount Kit for 9/16"         |                                                               |                                                     |
|                   |                   | PMK-TC15/16-4 4FT T-Grid Surface Mount Kit for 15/16"  | PMK-TC15/16-4 4FT T-Grid Surface Mount Kit for 15/16"  |                                                               |                                                     |
|                   |                   | TSMK-TC9/16-4 4FT T-Grid Surface Mount Kit for 9/16"   | TSMK-TC9/16-4 4FT T-Grid Surface Mount Kit for 9/16"   |                                                               |                                                     |
|                   |                   | TSMK-TC15/16-4 4FT T-Grid Surface Mount Kit for 15/16" | TSMK-TC15/16-4 4FT T-Grid Surface Mount Kit for 15/16" |                                                               |                                                     |

xx represents canopy color (Specify: WH / BK / SV)


4FT is standard (Replace the 4 with the desired length if different)

xx represents canopy color (Specify: WH / BK / SV)

4FT is standard (Replace the 4 with the desired length if different)

### STRAIGHT CONNECTION

ANY COMBINATION OF MODULES CAN BE CONNECTED. NO CONNECTORS ARE REQUIRED FOR STRAIGHT CONNECTION BETWEEN TWO LINEAR LUMINAIRES.

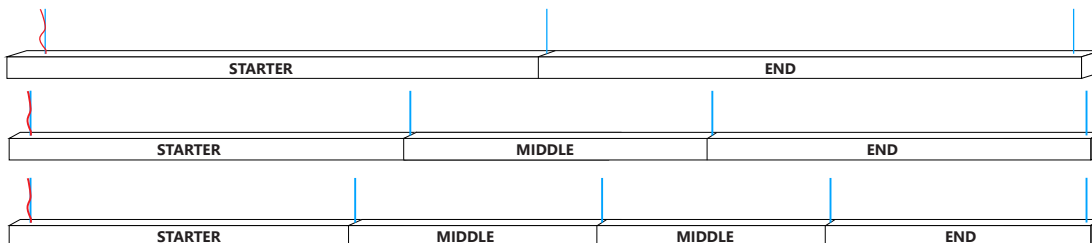

### OPTIONAL ACCESSORIES FOR CONTINUOUS RUN SYSTEM

|                    |                                                                                                                                         |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| JADIL-CS-XC-XX     | X Connector - Lit connector with CCT selectable built in 35K/40K/50K. Please fill the XX with one of the frame color options: -WH/BK/SV |
| JADIL-CS-TC-XX     | T Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                    |
| JADIL-CS-LC-XX     | L Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                    |
| JADIL-CS-YC-XX     | Y Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                    |
| JADIL-CS-VC-XX     | V Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                    |
| JADIL-CS-FLEX-LENS | Lens roll up to 82ft long                                                                                                               |

### FIELD INSTALLED OPTIONS

|         |                                                  |
|---------|--------------------------------------------------|
| BMWO-RC | Remote Control For Bi-Level Microwave Occ Sensor |
| EM8     | Self-Diagnostic Li-ion EM pack 8W, 90 minutes    |
| EM15    | Self-Diagnostic Li-ion EM pack 15W, 90 minutes   |

### WIRING OPTIONS

|         |                                                                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| DWRC    | Dedicated wire-power feed run for continuous runs from generator/UPS (Uninterrupted power supply) build with 2 drivers. In an emergency downlight only. |
| DWRCIEM | Dedicated wire-power feed run for continuous runs for internal EM pack. In an emergency up/down will lit.                                               |

### MAXIMUM LUMINAIRE QUANTITY PER POWER DROP

| Length | Power | Voltage | Quantity | Voltage | Quantity |
|--------|-------|---------|----------|---------|----------|
| 24"    | 15W   | 120V    | 33pcs    | 277V    | 76pcs    |
| 24"    | 20W   | 120V    | 25pcs    | 277V    | 57pcs    |
| 48"    | 30W   | 120V    | 16pcs    | 277V    | 38pcs    |
| 48"    | 40W   | 120V    | 12pcs    | 277V    | 28pcs    |

| Length | Power | Voltage | Quantity | Voltage | Quantity |
|--------|-------|---------|----------|---------|----------|
| 72"    | 45W   | 120V    | 11pcs    | 277V    | 25pcs    |
| 72"    | 60W   | 120V    | 8pcs     | 277V    | 19pcs    |
| 96"    | 60W   | 120V    | 8pcs     | 277V    | 19pcs    |
| 96"    | 80W   | 120V    | 6pcs     | 277V    | 14pcs    |



Quotations: quotes@jademar.com  
To place an order: orders@jademar.com  
Tel: (305) 640.0465 | Fax: (305) 640.0468  
**WWW.JADEMAR.COM**



Jademar Lighting has prepared the information contained in this document with due care. However, Jademar Lighting does not warrant or represent that the information is free from errors or omission. While the information is considered to be true and correct at the date of publication, changes in circumstances after that date may impact on its accuracy. The information may change without notice and Jademar Lighting is not liable for the accuracy of any information printed and stored or interpreted or used.

Revised 08/2026

## SPECIFICATION SUBMITTAL DETAIL

|                    |  |       |
|--------------------|--|-------|
| Project Name/Type: |  | Date: |
| Catalog/Part #:    |  |       |

### JADIL-SL SERIES 24", 48", 72" & 96" ARCHITECTURAL SLIM DESIGN DIRECT/INDIRECT CCT SELECTABLE, LINEAR LUMINAIRE CONTINUOUS RUN Ordering Information / Example: JADIL-SL-DI-C4-40W-7030-CS-FL-D-BMWO-DH-ST-WH-PMK4-WH-PMK4-WH-2C-EM8

| Product Series     | Light Distribution | Length - Wattage                                                     | Indirect/Direct Ratio                                                                                                            | Input Voltage                           | CCT                                                                                             | Lens Type                                                                                              | CRI                                  | Dimming                                                                                                                               | Controls Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------|--------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| JADIL-SL           | D Direct           | C2-15W 24"-15W<br>C4-30W 48"-30W<br>C6-45W 72"-45W<br>C8-60W 96"-60W | 7030 1-70% / D-30%<br>6040 1-60% / D-40%<br>5050 1-50% / D-50%<br>4060 1-40% / D-60%<br>3070 1-30% / D-70%<br>0100 1-0% / D-100% | Blank 120-277V (Standard)<br>H 277-480V | CS Selectable 35K/40K/50K<br>27K Static 27K<br>TW Tunable White 27K-65K<br>RGB Red, Blue, Green | FL Flat Diffused Lens<br>LL Louver Lens<br>ASV Wall Wash/Grazer<br>HL Honeycomb Lens<br>BL Baffle Lens | Blank 80 CRI (Standard)<br>90 90 CRI | D 0-10V Internal Dimming Driver (Standard)<br>2CHD 2 Channel Driver (Unavailable for CCT Selectable)<br>DALI<br>1PD 1% Dimming Driver | BMWO-DH Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Daylight Harvesting Sensor)<br>BMWO-BT-SA Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Bluetooth Controller w/Smart App)<br>SR-NLC-MWS Silavir Microwave Sensor Integral Magnet Mount<br>CB-NLC-MWS Casambi Microwave Sensor Integral Magnet Mount<br>BN-NLC-MWS Bubblynet Microwave Sensor Integral Magnet Mount<br>SR-NLC-FC Silavir Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input<br>CB-NLC-FC Casambi Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input<br>BN-NLC-FC Bubblynet Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input |
| DI Direct/Indirect |                    | C2-20W 24"-20W<br>C4-40W 48"-40W<br>C6-60W 72"-60W<br>C8-80W 96"-80W |                                                                                                                                  |                                         |                                                                                                 |                                                                                                        |                                      |                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

Specify the Ratio for Direct/Indirect Models

Specify the set CCT on the order (Example: Set CCT @ 2700K)

\* Special order features may cost more and may come extend lead times.

\* Max 98W

| Module Type       | Profile Color                                                          | Starter Module Mounting Options                       | Middle/End Modules Mounting Options                   | Wiring Options                                                | Other Options                                       |
|-------------------|------------------------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------|
| ST Starter Module | WH White                                                               | PMK4-xx 4FT Pendant Mount Kit                         | PMK4-xx 4FT Pendant Mount Kit                         | 2C 2 Circuits/2 Drivers for Static CCT Only                   | Blank Not BAA/BABA                                  |
| MD Middle Module  | BK Black                                                               | CMK-2 2FT Ceiling/Surface Mount Kit                   | CMK-2 2FT Ceiling/Surface Mount Kit                   | 2CHD 2 Channel Driver for Static CCT Only                     | EM8 Factory Installed 8W EM Pack (90 Minutes) 4FT   |
| EN End Module     | SV Silver                                                              | RMK-2 2FT Trimless Recessed Mount Kit                 | RMK-2 2FT Trimless Recessed Mount Kit                 | DWS Dedicated power feed (Generator/UPS) in an emergency only | EM15 Factory Installed 15W EM Pack (90 Minutes) 4FT |
|                   | CC Custom Profile                                                      | TRMK-2 2FT Grid Recessed Mount Kit                    | TRMK-2 2FT Grid Recessed Mount Kit                    |                                                               | BAA Buy American Act                                |
|                   | * Input RAL number                                                     | RFMK-2 2FT Recessed With Flange Mount Kit             | RFMK-2 2FT Recessed With Flange Mount Kit             |                                                               | BABA Build America, Buy America                     |
|                   | * Special order features may cost more and may come extend lead times. | WMK-2 2FT Wall Mount Kit                              | WMK-2 2FT Wall Mount Kit                              |                                                               |                                                     |
|                   |                                                                        | RWMK-2 2FT Rotatable Wall Mount Kit                   | RWMK-2 2FT Rotatable Wall Mount Kit                   |                                                               |                                                     |
|                   |                                                                        | PMK-TC3 4FTT Grid Pendant Mount Kit for 9/16"         | PMK-TC3 4FTT Grid Pendant Mount Kit for 9/16"         |                                                               | * Selected SKU's Only                               |
|                   |                                                                        | PMK-TC15/16-4 4FTT Grid Pendant Mount Kit for 15/16"  | PMK-TC15/16-4 4FTT Grid Pendant Mount Kit for 15/16"  |                                                               |                                                     |
|                   |                                                                        | TSMK-TC9/16-4 4FTT Grid Surface Mount Kit for 9/16"   | TSMK-TC9/16-4 4FTT Grid Surface Mount Kit for 9/16"   |                                                               |                                                     |
|                   |                                                                        | TSMK-TC15/16-4 4FTT Grid Surface Mount Kit for 15/16" | TSMK-TC15/16-4 4FTT Grid Surface Mount Kit for 15/16" |                                                               |                                                     |

\*xx represents canopy color (Specify: WH / BK / SV)

\*4FT is standard (Replace the 4 with the desired length if different)

\*xx represents canopy color (Specify: WH / BK / SV)

\*4FT is standard (Replace the 4 with the desired length if different)

### OPTIONAL ACCESSORIES FOR CONTINUOUS RUN SYSTEM

|                    |                                                                                                                                        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| JADIL-CS-XC-XX     | X Connector - Lit connector with CCT selectable built in 35K/40K/50K Please fill the XX with one of the frame color options: -WH/BK/SV |
| JADIL-CS-TC-XX     | T Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                   |
| JADIL-CS-LC-XX     | L Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                   |
| JADIL-CS-YC-XX     | Y Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                   |
| JADIL-CS-VC-XX     | V Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                   |
| JADIL-CS-FLEX-LENS | Lens roll up to 82ft long                                                                                                              |



JADIL-SL-LC  
90° L-SHAPED  
LIT CONNECTOR

#### SQUARE DESIGN

[4] 24", 48", 72" or 96" Middle Modules  
[4] L Connectors



None-powered  
Canopy/Aircraft cable  
Height: 3/16"  
Diameter: 4 3/4"



Powered  
Canopy/Aircraft cable & Power cord  
Height: 3/16"  
Diameter: 4 3/4"

Note: Canopies with driver inside size could be 12" to 16" in diameter with depth from 2" to 3". Please consult sales team for more information.

### FIELD INSTALLED OPTIONS


|         |                                                  |
|---------|--------------------------------------------------|
| BMWO-RC | Remote Control For Bi-Level Microwave Occ Sensor |
| EM8     | Self-Diagnostic Li-ion EM pack 8W, 90 minutes    |
| EM15    | Self-Diagnostic Li-ion EM pack 15W, 90 minutes   |

### WIRING OPTIONS

|         |                                                                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| DWRC    | Dedicated wire-power feed run for continuous runs from generator/UPS (Uninterrupted power supply) build with 2 drivers. In an emergency downlight only. |
| DWRCIEM | Dedicated wire-power feed run for continuous runs for internal EM pack. In an emergency up/down will lit.                                               |

#### RECTANGLE DESIGN

[2] 24" or 48" Middle Module  
[2] 48" or 96" Middle Modules  
[4] L Connectors



THE CONNECTORS ARE SEAMLESS CONTINUOUS LIT CONNECTORS WITH STATE-OF-THE-ART AUTO-TUNING CCT AND LUMEN OUTPUT THAT ADJUSTS DIRECTLY FROM THE CONNECTED LEADER MODULES.

NOTE: UPLIGHT IS NOT AVAILABLE IN ANY CONNECTOR.

### MAXIMUM LUMINAIRE QUANTITY PER POWER DROP

| Length | Power | Voltage | Quantity | Voltage | Quantity |
|--------|-------|---------|----------|---------|----------|
| 24"    | 15W   | 120V    | 33pcs    | 277V    | 76pcs    |
| 24"    | 20W   | 120V    | 25pcs    | 277V    | 57pcs    |
| 48"    | 30W   | 120V    | 16pcs    | 277V    | 38pcs    |
| 48"    | 40W   | 120V    | 12pcs    | 277V    | 28pcs    |

| Length | Power | Voltage | Quantity | Voltage | Quantity |
|--------|-------|---------|----------|---------|----------|
| 72"    | 45W   | 120V    | 11pcs    | 277V    | 25pcs    |
| 72"    | 60W   | 120V    | 8pcs     | 277V    | 19pcs    |
| 96"    | 60W   | 120V    | 8pcs     | 277V    | 19pcs    |
| 96"    | 80W   | 120V    | 6pcs     | 277V    | 14pcs    |



|                    |  |       |
|--------------------|--|-------|
| Project Name/Type: |  | Date: |
| Catalog/Part #:    |  |       |

### JADIL-SL SERIES 24", 48", 72" & 96" ARCHITECTURAL SLIM DESIGN DIRECT/INDIRECT CCT SELECTABLE, LINEAR LUMINAIRE

CONTINUOUS RUN Ordering Information / Example: JADIL-SL-DI-C4-40W-7030-CS-FL-D-BMWO-DH-ST-WH-PMK4-WH-PMK4-WH-2C-EM8

| Product Series | Light Distribution | Length - Wattage                                                     | Indirect/Direct Ratio                                                                                                            | Input Voltage                           | CCT                                                                                          | Lens Type                                                                                             | CRI                                  | Dimming                                                                                                                                    | Controls Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------|--------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| JADIL-SL       | D Direct           | C2-15W 24"-15W<br>C4-30W 48"-30W<br>C6-45W 72"-45W<br>C8-60W 96"-60W | 7030 1-70% / D-30%<br>6040 1-60% / D-40%<br>5050 1-50% / D-50%<br>4060 1-40% / D-60%<br>3070 1-30% / D-70%<br>0100 1-0% / D-100% | Blank 120-277V (Standard)<br>H 277-480V | CS Selectable 35K/40K/50K<br>27K Static 27K<br>Tunable White 27K-65K<br>RGB Red, Blue, Green | FL Flat Diffused Lens<br>LL Lower Lens<br>ASV Wall Wash/Grazer<br>HL Honeycomb Lens<br>BL Baffle Lens | Blank 80 CRI (Standard)<br>90 90 CRI | D 0-10V Internal Dimming Driver (Standard)<br>2CHD 2 Channel Driver (Unavailable for CCT Selectable)<br>DALI DALI<br>1PD 1% Dimming Driver | BMWO-DH Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Daylight Harvesting Sensor)<br>BMWO-BT-SA Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Bluetooth Controller w/Smart App)<br>SR-NLC-MWS Silavir Microwave Sensor Integral Magnet Mount<br>CB-NLC-MWS Casambi Microwave Sensor Integral Magnet Mount<br>BN-NLC-MWS Bubblynet Microwave Sensor Integral Magnet Mount<br>SR-NLC-FC Silavir Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input<br>CB-NLC-FC Casambi Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input<br>BN-NLC-FC Bubblynet Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input |

Specify the Ratio for Direct/Indirect Models

Specify the set CCT on the order (Example: Set CCT @ 2700K)

| Module Type       | Profile Color     | Starter Module Mounting Options                       | Middle/End Modules Mounting Options                   | Wiring Options                                                | Other Options                                       |
|-------------------|-------------------|-------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------|
| ST Starter Module | WH White          | PMK-4-xx 4FT Pendant Mount Kit                        | PMK-4-xx 4FT Pendant Mount Kit                        | 2C 2 Circuits/2 Drivers for Static CCT Only                   | Blank Not BAA/BABA                                  |
| MD Middle Module  | BK Black          | CMK-2 2FT Ceiling/Surface Mount Kit                   | CMK-2 2FT Ceiling/Surface Mount Kit                   | 2CHD 2 Channel Driver for Static CCT Only                     | EM8 Factory Installed 8W EM Pack (90 Minutes) 4FT   |
| EN End Module     | SV Silver         | RMK-2 2FT Trimless Recessed Mount Kit                 | RMK-2 2FT Trimless Recessed Mount Kit                 | DWS Dedicated power feed (Generator/UPS) in an emergency only | EM15 Factory Installed 15W EM Pack (90 Minutes) 4FT |
|                   | CC Custom Profile | RFMK-2 2FT Recessed With Flange Mount Kit             | RFMK-2 2FT Recessed With Flange Mount Kit             |                                                               | BAA Buy American Act                                |
|                   |                   | WMK-2 2FT Wall Mount Kit                              | WMK-2 2FT Wall Mount Kit                              |                                                               | BABA Build America, Buy America                     |
|                   |                   | RWMK-2 2FT Rotatable Wall Mount Kit                   | RWMK-2 2FT Rotatable Wall Mount Kit                   |                                                               |                                                     |
|                   |                   | PMK-TC9 4FTT-Grid Pendant Mount Kit for 9/16"         | PMK-TC9 4FTT-Grid Pendant Mount Kit for 9/16"         |                                                               |                                                     |
|                   |                   | PMK-TC15/16-4 4FTT-Grid Surface Mount Kit for 15/16"  | PMK-TC15/16-4 4FTT-Grid Surface Mount Kit for 15/16"  |                                                               |                                                     |
|                   |                   | TSMK-TC9/16-4 4FTT-Grid Surface Mount Kit for 9/16"   | TSMK-TC9/16-4 4FTT-Grid Surface Mount Kit for 9/16"   |                                                               |                                                     |
|                   |                   | TSMK-TC15/16-4 4FTT-Grid Surface Mount Kit for 15/16" | TSMK-TC15/16-4 4FTT-Grid Surface Mount Kit for 15/16" |                                                               |                                                     |

xx represents canopy color (Specify: WH / BK / SV)

4FT is standard (Replace the 4 with the desired length if different)

xx represents canopy color (Specify: WH / BK / SV)

4FT is standard (Replace the 4 with the desired length if different)

### OPTIONAL ACCESSORIES FOR CONTINUOUS RUN SYSTEM

|                    |                                                                                                                                         |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| JADIL-CS-XC-XX     | X Connector - Lit connector with CCT selectable built in 35K/40K/50K. Please fill the XX with one of the frame color options: -WH/BK/SV |
| JADIL-CS-TC-XX     | T Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                    |
| JADIL-CS-LC-XX     | L Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                    |
| JADIL-CS-YC-XX     | Y Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                    |
| JADIL-CS-VC-XX     | V Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                    |
| JADIL-CS-FLEX-LENS | Lens roll up to 82ft long                                                                                                               |



THE CONNECTORS ARE SEAMLESS CONTINUOUS LIT CONNECTORS WITH STATE-OF-THE-ART AUTO-TUNING CCT AND LUMEN OUTPUT THAT ADJUSTS DIRECTLY FROM THE CONNECTED LEADER MODULES.


NOTE: UPLIGHT IS NOT AVAILABLE IN ANY CONNECTOR.

### FIELD INSTALLED OPTIONS

|         |                                                  |
|---------|--------------------------------------------------|
| BMWO-RC | Remote Control For Bi-Level Microwave Occ Sensor |
| EM8     | Self-Diagnostic Li-ion EM pack 8W, 90 minutes    |
| EM15    | Self-Diagnostic Li-ion EM pack 15W, 90 minutes   |


### WIRING OPTIONS

|         |                                                                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| DWRC    | Dedicated wire-power feed run for continuous runs from generator/UPS (Uninterrupted power supply) build with 2 drivers. In an emergency downlight only. |
| DWRCIEM | Dedicated wire-power feed run for continuous runs for internal EM pack. In an emergency up/down will lit.                                               |

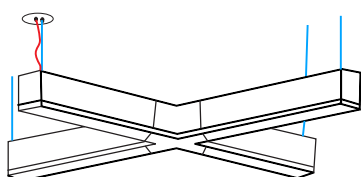


#### X DESIGN DESIGN:

- [2] 48" or 96" Starter Module
- [1] X Connector

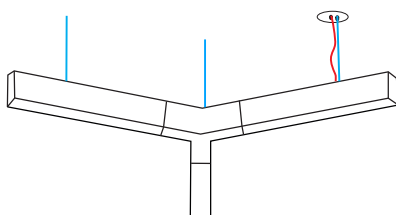

#### Y DESIGN DESIGN:


- [3] 24", 48" or 96" Starter Module
- [1] Y Connector

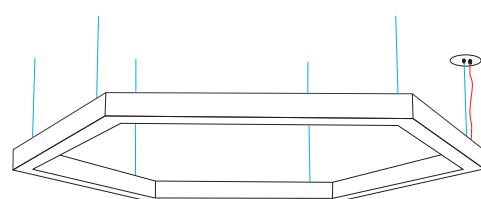

#### HEXAGON DESIGN:

- [6] 24", 48", 72" or 96" Middle Module
- [6] V Connectors



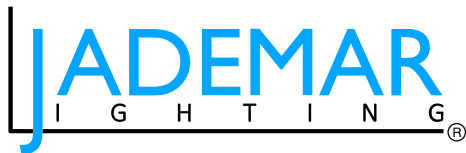

## SPECIFICATION SUBMITTAL DETAIL

|                    |  |       |
|--------------------|--|-------|
| Project Name/Type: |  | Date: |
| Catalog/Part #:    |  |       |

### JADIL-SL SERIES 24", 48", 72" & 96" ARCHITECTURAL SLIM DESIGN DIRECT/INDIRECT CCT SELECTABLE, LINEAR LUMINAIRE CONTINUOUS RUN Ordering Information / Example: JADIL-SL-DI-C4-40W-7030-CS-FL-D-BMWO-DH-ST-WH-PMK4-WH-PMK4-WH-2C-EM8

| Product Series | Light Distribution | Length - Wattage                                                     | Indirect/Direct Ratio                                                                                                            | Input Voltage                           | CCT                                                                                             | Lens Type                                                                                             | CRI                                  | Dimming                                                                                                                               | Controls Options                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------|--------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| JADIL-SL       | D Direct           | C2-15W 24"-15W<br>C4-30W 48"-30W<br>C6-45W 72"-45W<br>C8-60W 96"-60W | 7030 1-70% / D-30%<br>6040 1-60% / D-40%<br>5050 1-50% / D-50%<br>4060 1-40% / D-60%<br>3070 1-30% / D-70%<br>0100 1-0% / D-100% | Blank 120-277V (Standard)<br>H 277-480V | CS Selectable 35K/40K/50K<br>27K Static 27K<br>TW Tunable White 27K-65K<br>RGB Red, Blue, Green | FL Flat Diffused Lens<br>LL Lower Lens<br>ASV Wall Wash/Grazer<br>HL Honeycomb Lens<br>BL Baffle Lens | Blank 80 CRI (Standard)<br>90 90 CRI | D 0-10V Internal Dimming Driver (Standard)<br>2CHD 2 Channel Driver (Unavailable for CCT Selectable)<br>DALI<br>1PD 1% Dimming Driver | BMWO-DH Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Daylight Harvesting Sensor)<br>BMWO-BT-SA Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Bluetooth Controller w/Smart App)<br>SR-NLC-MWS Silair Microwave Sensor Integral Magnet Mount<br>CB-NLC-MWS Casambi Microwave Sensor Integral Magnet Mount<br>BN-NLC-MWS Bubblynet Microwave Sensor Integral Magnet Mount<br>SR-NLC-FC Silair Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input<br>CB-NLC-FC Casambi Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input<br>BN-NLC-FC Bubblynet Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input |
| JADIL-SL       | DI Direct/Indirect | C2-20W 24"-20W<br>C4-40W 48"-40W<br>C6-60W 72"-60W<br>C8-80W 96"-80W |                                                                                                                                  |                                         |                                                                                                 |                                                                                                       |                                      |                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

Specify the Ratio for Direct/Indirect Models

Specify the set CCT on the order (Example: Set CCT @ 2700K)

\* Special order features may cost more and may come extend lead times.

\* Max 98W

| Module Type       | Profile Color                     | Starter Module Mounting Options                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Middle/End Modules Mounting Options                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Wiring Options                                                                                                                                                             | Other Options                                                                                                                                                                             |
|-------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ST Starter Module | WH White<br>BK Black<br>SV Silver | PMK-4-xx 4FT Pendant Mount Kit<br>CMK-2 2FT Ceiling/Surface Mount Kit<br>RMK-2 2FT Trimless Recessed Mount Kit<br>TRMK-2 2FT-Grid Recessed Mount Kit<br>RFMK-2 2FT Recessed With Flange Mount Kit<br>WMK-2 2FT Wall Mount Kit<br>RWK-2 2FT Rotatable Wall Mount Kit<br>PMK-TC9 4FTT-Grid Pendant Mount Kit for 9/16"<br>PMK-TC15/16-4 4FTT-Grid Pendant Mount Kit for 15/16"<br>TSMK-TC9/16-4 4FTT-Grid Surface Mount Kit for 9/16"<br>TSMK-TC15/16-4 4FTT-Grid Surface Mount Kit for 15/16" | PMK-4-xx 4FT Pendant Mount Kit<br>CMK-2 2FT Ceiling/Surface Mount Kit<br>RMK-2 2FT Trimless Recessed Mount Kit<br>TRMK-2 2FT-Grid Recessed Mount Kit<br>RFMK-2 2FT Recessed With Flange Mount Kit<br>WMK-2 2FT Wall Mount Kit<br>RWK-2 2FT Rotatable Wall Mount Kit<br>PMK-TC9 4FTT-Grid Pendant Mount Kit for 9/16"<br>PMK-TC15/16-4 4FTT-Grid Pendant Mount Kit for 15/16"<br>TSMK-TC9/16-4 4FTT-Grid Surface Mount Kit for 9/16"<br>TSMK-TC15/16-4 4FTT-Grid Surface Mount Kit for 15/16" | 2C 2 Circuits/2 Drivers for Static CCT Only<br>2CHD 2 Channel Driver for Static CCT Only<br>DWS Dedicated power feed (Generator/UPS) in an emergency only<br>downlight lit | Blank Not BAA/BABA<br>EM8 Factory Installed 8W EM Pack (90 Minutes) 4FT<br>EM15 Factory Installed 15W EM Pack (90 Minutes) 4FT<br>BAA Buy American Act<br>BABA Build America, Buy America |

xx represents canopy color (Specify: WH / BK / SV)

4FT is standard (Replace the 4 with the desired length if different)

xx represents canopy color (Specify: WH / BK / SV)

4FT is standard (Replace the 4 with the desired length if different)

### OPTIONAL ACCESSORIES FOR CONTINUOUS RUN SYSTEM

|                    |                                                                                                                                        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| JADIL-CS-XC-XX     | X Connector - Lit connector with CCT selectable built in 35K/40K/50K Please fill the XX with one of the frame color options: -WH/BK/SV |
| JADIL-CS-TC-XX     | T Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                   |
| JADIL-CS-LC-XX     | L Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                   |
| JADIL-CS-YC-XX     | Y Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                   |
| JADIL-CS-VC-XX     | V Connector - Lit connector with CCT selectable built in 35K/40K/50K                                                                   |
| JADIL-CS-FLEX-LENS | Lens roll up to 82ft long                                                                                                              |

### WIRING OPTIONS

|         |                                                                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| DWRC    | Dedicated wire-power feed run for continuous runs from generator/UPS (Uninterrupted power supply) build with 2 drivers. In an emergency downlight only. |
| DWRCIEM | Dedicated wire-power feed run for continuous runs for internal EM pack. In an emergency up/down will lit.                                               |

### FIELD INSTALLED OPTIONS

|         |                                                  |
|---------|--------------------------------------------------|
| BMWO-RC | Remote Control For Bi-Level Microwave Occ Sensor |
| EM8     | Self-Diagnostic Li-ion EM pack 8W, 90 minutes    |
| EM15    | Self-Diagnostic Li-ion EM pack 15W, 90 minutes   |

THE CONNECTORS ARE SEAMLESS CONTINUOUS LIT CONNECTORS WITH STATE-OF-THE-ART AUTO-TUNING CCT AND LUMEN OUTPUT THAT ADJUSTS DIRECTLY FROM THE CONNECTED LEADER MODULES.


NOTE: UPLIGHT IS NOT AVAILABLE IN ANY CONNECTOR.



### MAXIMUM LUMINAIRE QUANTITY PER POWER DROP

| Length | Power | Voltage | Quantity | Voltage | Quantity |
|--------|-------|---------|----------|---------|----------|
| 24"    | 15W   | 120V    | 33pcs    | 277V    | 76pcs    |
| 24"    | 20W   | 120V    | 25pcs    | 277V    | 57pcs    |
| 48"    | 30W   | 120V    | 16pcs    | 277V    | 38pcs    |
| 48"    | 40W   | 120V    | 12pcs    | 277V    | 28pcs    |

| Length | Power | Voltage | Quantity | Voltage | Quantity |
|--------|-------|---------|----------|---------|----------|
| 72"    | 45W   | 120V    | 11pcs    | 277V    | 25pcs    |
| 72"    | 60W   | 120V    | 8pcs     | 277V    | 19pcs    |
| 96"    | 60W   | 120V    | 8pcs     | 277V    | 19pcs    |
| 96"    | 80W   | 120V    | 6pcs     | 277V    | 14pcs    |

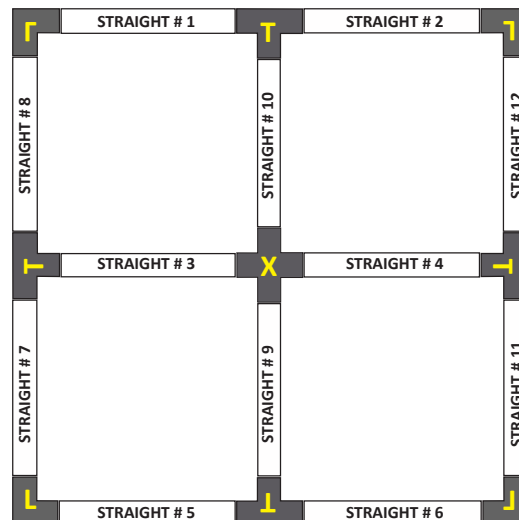

COMPLEX CONNECTION DESIGN  
[12] 24", 48", 72", or 96" Middle Modules  
[4] L [4] T and [1] X Connectors



Quotations: quotes@jademar.com  
To place an order: orders@jademar.com  
Tel: (305) 640.0465 | Fax: (305) 640.0468  
**WWW.JADEMAR.COM**



Jademar Lighting has prepared the information contained in this document with due care. However, Jademar Lighting does not warrant or represent that the information is free from errors or omission. While the information is considered to be true and correct at the date of publication, changes in circumstances after that date may impact on its accuracy. The information may change without notice and Jademar Lighting is not liable for the accuracy of any information printed and stored or interpreted or used.

Revised 08/2026

### LUMEN PERFORMANCE

#### DIRECT/DOWN



2FT, 4FT, 6FT, 8FT

#### 2 FEET 15W-Diffused Lens

| CCT   | A<br>15W 100% | B<br>10.5W 70% | C<br>9W 60% | D<br>7.5W 50% | E<br>6W 40% | F<br>4.5W 30% | G<br>0W 0% | CRI   | Dimming<br>Depth |
|-------|---------------|----------------|-------------|---------------|-------------|---------------|------------|-------|------------------|
| 3000K | 1905LM        | 1365LM         | 1170LM      | 975LM         | 780LM       | 585LM         | OFF        | 80/90 | 10%              |
| 3500K | 1950LM        | 1365LM         | 1170LM      | 975LM         | 780LM       | 585LM         | OFF        | 80/90 | 10%              |
| 4000K | 1920LM        | 1365LM         | 1170LM      | 975LM         | 780LM       | 585LM         | OFF        | 80/90 | 10%              |

#### 4 FEET 30W-Diffused Lens

| CCT   | A<br>30W 100% | B<br>21W 70% | C<br>18W 60% | D<br>15W 50% | E<br>12W 40% | F<br>9W 30% | G<br>0W 0% | CRI   | Dimming<br>Depth |
|-------|---------------|--------------|--------------|--------------|--------------|-------------|------------|-------|------------------|
| 3000K | 3810LM        | 2730LM       | 2340LM       | 1950LM       | 1560LM       | 1170LM      | OFF        | 80/90 | 10%              |
| 3500K | 3900LM        | 2730LM       | 2340LM       | 1950LM       | 1560LM       | 1170LM      | OFF        | 80/90 | 10%              |
| 4000K | 3840LM        | 2730LM       | 2340LM       | 1950LM       | 1560LM       | 1170LM      | OFF        | 80/90 | 10%              |

#### 6 FEET 45W-Diffused Lens

| CCT   | A<br>45W 100% | B<br>31.5W 70% | C<br>27W 60% | D<br>22.5W 50% | E<br>18W 40% | F<br>13.5W 30% | G<br>0W 0% | CRI   | Dimming<br>Depth |
|-------|---------------|----------------|--------------|----------------|--------------|----------------|------------|-------|------------------|
| 3000K | 5715LM        | 4095LM         | 3510LM       | 2925LM         | 2340LM       | 1755LM         | OFF        | 80/90 | 10%              |
| 3500K | 5850LM        | 4095LM         | 3510LM       | 2925LM         | 2340LM       | 1755LM         | OFF        | 80/90 | 10%              |
| 4000K | 5760LM        | 4095LM         | 3510LM       | 2925LM         | 2340LM       | 1755LM         | OFF        | 80/90 | 10%              |

#### 8 FEET 60W-Diffused Lens

| CCT   | A<br>60W 100% | B<br>42W 70% | C<br>36W 60% | D<br>30W 50% | E<br>24W 40% | F<br>18W 30% | G<br>0W 0% | CRI   | Dimming<br>Depth |
|-------|---------------|--------------|--------------|--------------|--------------|--------------|------------|-------|------------------|
| 3000K | 7620LM        | 5460LM       | 4680LM       | 3900LM       | 3120LM       | 2340LM       | OFF        | 80/90 | 10%              |
| 3500K | 7800LM        | 5460LM       | 4680LM       | 3900LM       | 3120LM       | 2340LM       | OFF        | 80/90 | 10%              |
| 4000K | 7680LM        | 5460LM       | 4680LM       | 3900LM       | 3120LM       | 2340LM       | OFF        | 80/90 | 10%              |





### LUMEN PERFORMANCE

#### DIRECT/INDIRECT



2FT, 4FT, 6FT



8FT

#### 2 FEET 20W-Diffused Lens

| CCT   | A           |             | B          |              | C          |              | D          |              | E          |              | F          |              | G         |               | CRI   | Dimming Depth |
|-------|-------------|-------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|-----------|---------------|-------|---------------|
|       | DIRECT 100% | INDIRECT 0% | DIRECT 70% | INDIRECT 30% | DIRECT 60% | INDIRECT 40% | DIRECT 50% | INDIRECT 50% | DIRECT 40% | INDIRECT 60% | DIRECT 30% | INDIRECT 70% | DIRECT 0% | INDIRECT 100% |       |               |
| 3000K | 1905LM      | OFF         | 1820LM     | 780LM        | 1560LM     | 1040LM       | 1300LM     | 1300LM       | 1040LM     | 1560LM       | 780LM      | 1820LM       | OFF       | 1905LM        | 80/90 | 10%           |
| 3500K | 1950LM      | OFF         | 1820LM     | 780LM        | 1560LM     | 1040LM       | 1300LM     | 1300LM       | 1040LM     | 1560LM       | 780LM      | 1820LM       | OFF       | 1950LM        | 80/90 | 10%           |
| 4000K | 1920LM      | OFF         | 1820LM     | 780LM        | 1560LM     | 1040LM       | 1300LM     | 1300LM       | 1040LM     | 1560LM       | 780LM      | 1820LM       | OFF       | 1920LM        | 80/90 | 10%           |

#### 4 FEET 40W-Diffused Lens

| CCT   | A           |             | B          |              | C          |              | D          |              | E          |              | F          |              | G         |               | CRI   | Dimming Depth |
|-------|-------------|-------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|-----------|---------------|-------|---------------|
|       | DIRECT 100% | INDIRECT 0% | DIRECT 70% | INDIRECT 30% | DIRECT 60% | INDIRECT 40% | DIRECT 50% | INDIRECT 50% | DIRECT 40% | INDIRECT 60% | DIRECT 30% | INDIRECT 70% | DIRECT 0% | INDIRECT 100% |       |               |
| 3000K | 3810LM      | OFF         | 3640LM     | 1560LM       | 3120LM     | 2080LM       | 2600LM     | 2600LM       | 2080LM     | 3120LM       | 1560LM     | 3640LM       | OFF       | 3810LM        | 80/90 | 10%           |
| 3500K | 3900LM      | OFF         | 3640LM     | 1560LM       | 3120LM     | 2080LM       | 2600LM     | 2600LM       | 2080LM     | 3120LM       | 1560LM     | 3640LM       | OFF       | 3900LM        | 80/90 | 10%           |
| 4000K | 3840LM      | OFF         | 3640LM     | 1560LM       | 3120LM     | 2080LM       | 2600LM     | 2600LM       | 2080LM     | 3120LM       | 1560LM     | 3640LM       | OFF       | 3840LM        | 80/90 | 10%           |

#### 6 FEET 60W-Diffused Lens

| CCT   | A           |             | B          |              | C          |              | D          |              | E          |              | F          |              | G         |               | CRI   | Dimming Depth |
|-------|-------------|-------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|-----------|---------------|-------|---------------|
|       | DIRECT 100% | INDIRECT 0% | DIRECT 70% | INDIRECT 30% | DIRECT 60% | INDIRECT 40% | DIRECT 50% | INDIRECT 50% | DIRECT 40% | INDIRECT 60% | DIRECT 30% | INDIRECT 70% | DIRECT 0% | INDIRECT 100% |       |               |
| 3000K | 5710LM      | OFF         | 5460LM     | 2340LM       | 4680LM     | 3120LM       | 3900LM     | 3900LM       | 3120LM     | 4680LM       | 2340LM     | 5460LM       | OFF       | 5710LM        | 80/90 | 10%           |
| 3500K | 5850LM      | OFF         | 5460LM     | 2340LM       | 4680LM     | 3120LM       | 3900LM     | 3900LM       | 3120LM     | 4680LM       | 2340LM     | 5460LM       | OFF       | 5850LM        | 80/90 | 10%           |
| 4000K | 5760LM      | OFF         | 5460LM     | 2340LM       | 4680LM     | 3120LM       | 3900LM     | 3900LM       | 3120LM     | 4680LM       | 2340LM     | 5460LM       | OFF       | 5760LM        | 80/90 | 10%           |

#### 8 FEET 80W-Diffused Lens

| CCT   | A           |             | B          |              | C          |              | D          |              | E          |              | F          |              | G         |               | CRI   | Dimming Depth |
|-------|-------------|-------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|-----------|---------------|-------|---------------|
|       | DIRECT 100% | INDIRECT 0% | DIRECT 70% | INDIRECT 30% | DIRECT 60% | INDIRECT 40% | DIRECT 50% | INDIRECT 50% | DIRECT 40% | INDIRECT 60% | DIRECT 30% | INDIRECT 70% | DIRECT 0% | INDIRECT 100% |       |               |
| 3000K | 7620LM      | OFF         | 7280LM     | 3120LM       | 6240LM     | 4160LM       | 5200LM     | 5200LM       | 4160LM     | 6240LM       | 3120LM     | 7280LM       | OFF       | 7620LM        | 80/90 | 10%           |
| 3500K | 7800LM      | OFF         | 7280LM     | 3120LM       | 6240LM     | 4160LM       | 5200LM     | 5200LM       | 4160LM     | 6240LM       | 3120LM     | 7280LM       | OFF       | 7800LM        | 80/90 | 10%           |
| 4000K | 7680LM      | OFF         | 7280LM     | 3120LM       | 6240LM     | 4160LM       | 5200LM     | 5200LM       | 4160LM     | 6240LM       | 3120LM     | 7280LM       | OFF       | 7680LM        | 80/90 | 10%           |



### LUMEN PERFORMANCE

#### DIRECT/DOWN



2FT, 4FT, 6FT, 8FT

#### 2 FEET 15W-Louver Lens

| CCT   | A<br>15W 100% | B<br>10.5W 70% | C<br>9W 60% | D<br>7.5W 50% | E<br>6W 40% | F<br>4.5W 30% | G<br>0W 0% | CRI   | Dimming<br>Depth |
|-------|---------------|----------------|-------------|---------------|-------------|---------------|------------|-------|------------------|
| 3000K | 1905LM        | 1365LM         | 1170LM      | 975LM         | 780LM       | 585LM         | OFF        | 80/90 | 10%              |
| 3500K | 1950LM        | 1365LM         | 1170LM      | 975LM         | 780LM       | 585LM         | OFF        | 80/90 | 10%              |
| 4000K | 1920LM        | 1365LM         | 1170LM      | 975LM         | 780LM       | 585LM         | OFF        | 80/90 | 10%              |

#### 4 FEET 30W-Louver Lens

| CCT   | A<br>30W 100% | B<br>21W 70% | C<br>18W 60% | D<br>15W 50% | E<br>12W 40% | F<br>9W 30% | G<br>0W 0% | CRI   | Dimming<br>Depth |
|-------|---------------|--------------|--------------|--------------|--------------|-------------|------------|-------|------------------|
| 3000K | 3810LM        | 2730LM       | 2340LM       | 1950LM       | 1560LM       | 1170LM      | OFF        | 80/90 | 10%              |
| 3500K | 3900LM        | 2730LM       | 2340LM       | 1950LM       | 1560LM       | 1170LM      | OFF        | 80/90 | 10%              |
| 4000K | 3840LM        | 2730LM       | 2340LM       | 1950LM       | 1560LM       | 1170LM      | OFF        | 80/90 | 10%              |

#### 6 FEET 45W-Louver Lens

| CCT   | A<br>45W 100% | B<br>31.5W 70% | C<br>27W 60% | D<br>22.5W 50% | E<br>18W 40% | F<br>13.5W 30% | G<br>0W 0% | CRI   | Dimming<br>Depth |
|-------|---------------|----------------|--------------|----------------|--------------|----------------|------------|-------|------------------|
| 3000K | 5715LM        | 4095LM         | 3510LM       | 2925LM         | 2340LM       | 1755LM         | OFF        | 80/90 | 10%              |
| 3500K | 5850LM        | 4095LM         | 3510LM       | 2925LM         | 2340LM       | 1755LM         | OFF        | 80/90 | 10%              |
| 4000K | 5760LM        | 4095LM         | 3510LM       | 2925LM         | 2340LM       | 1755LM         | OFF        | 80/90 | 10%              |

#### 8 FEET 60W-Louver Lens

| CCT   | A<br>60W 100% | B<br>42W 70% | C<br>36W 60% | D<br>30W 50% | E<br>24W 40% | F<br>18W 30% | G<br>0W 0% | CRI   | Dimming<br>Depth |
|-------|---------------|--------------|--------------|--------------|--------------|--------------|------------|-------|------------------|
| 3000K | 7620LM        | 5460LM       | 4680LM       | 3900LM       | 3120LM       | 2340LM       | OFF        | 80/90 | 10%              |
| 3500K | 7800LM        | 5460LM       | 4680LM       | 3900LM       | 3120LM       | 2340LM       | OFF        | 80/90 | 10%              |
| 4000K | 7680LM        | 5460LM       | 4680LM       | 3900LM       | 3120LM       | 2340LM       | OFF        | 80/90 | 10%              |



### LUMEN PERFORMANCE

#### DIRECT/INDIRECT



2FT, 4FT, 6FT



8FT

#### 2 FEET 20W-Louver Lens

| CCT   | A           |             | B          |              | C          |              | D          |              | E          |              | F          |              | G         |               | CRI   | Dimming Depth |
|-------|-------------|-------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|-----------|---------------|-------|---------------|
|       | DIRECT 100% | INDIRECT 0% | DIRECT 70% | INDIRECT 30% | DIRECT 60% | INDIRECT 40% | DIRECT 50% | INDIRECT 50% | DIRECT 40% | INDIRECT 60% | DIRECT 30% | INDIRECT 70% | DIRECT 0% | INDIRECT 100% |       |               |
| 3000K | 1905LM      | OFF         | 1820LM     | 780LM        | 1560LM     | 1040LM       | 1300LM     | 1300LM       | 1040LM     | 1560LM       | 780LM      | 1820LM       | OFF       | 1905LM        | 80/90 | 10%           |
| 3500K | 1950LM      | OFF         | 1820LM     | 780LM        | 1560LM     | 1040LM       | 1300LM     | 1300LM       | 1040LM     | 1560LM       | 780LM      | 1820LM       | OFF       | 1950LM        | 80/90 | 10%           |
| 4000K | 1920LM      | OFF         | 1820LM     | 780LM        | 1560LM     | 1040LM       | 1300LM     | 1300LM       | 1040LM     | 1560LM       | 780LM      | 1820LM       | OFF       | 1920LM        | 80/90 | 10%           |

#### 4 FEET 40W-Louver Lens

| CCT   | A           |             | B          |              | C          |              | D          |              | E          |              | F          |              | G         |               | CRI   | Dimming Depth |
|-------|-------------|-------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|-----------|---------------|-------|---------------|
|       | DIRECT 100% | INDIRECT 0% | DIRECT 70% | INDIRECT 30% | DIRECT 60% | INDIRECT 40% | DIRECT 50% | INDIRECT 50% | DIRECT 40% | INDIRECT 60% | DIRECT 30% | INDIRECT 70% | DIRECT 0% | INDIRECT 100% |       |               |
| 3000K | 3810LM      | OFF         | 3640LM     | 1560LM       | 3120LM     | 2080LM       | 2600LM     | 2600LM       | 2080LM     | 3120LM       | 1560LM     | 3640LM       | OFF       | 3810LM        | 80/90 | 10%           |
| 3500K | 3900LM      | OFF         | 3640LM     | 1560LM       | 3120LM     | 2080LM       | 2600LM     | 2600LM       | 2080LM     | 3120LM       | 1560LM     | 3640LM       | OFF       | 3900LM        | 80/90 | 10%           |
| 4000K | 3840LM      | OFF         | 3640LM     | 1560LM       | 3120LM     | 2080LM       | 2600LM     | 2600LM       | 2080LM     | 3120LM       | 1560LM     | 3640LM       | OFF       | 3840LM        | 80/90 | 10%           |

#### 6 FEET 60W-Louver Lens


| CCT   | A           |             | B          |              | C          |              | D          |              | E          |              | F          |              | G         |               | CRI   | Dimming Depth |
|-------|-------------|-------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|-----------|---------------|-------|---------------|
|       | DIRECT 100% | INDIRECT 0% | DIRECT 70% | INDIRECT 30% | DIRECT 60% | INDIRECT 40% | DIRECT 50% | INDIRECT 50% | DIRECT 40% | INDIRECT 60% | DIRECT 30% | INDIRECT 70% | DIRECT 0% | INDIRECT 100% |       |               |
| 3000K | 5710LM      | OFF         | 5460LM     | 2340LM       | 4680LM     | 3120LM       | 3900LM     | 3900LM       | 3120LM     | 4680LM       | 2340LM     | 5460LM       | OFF       | 5710LM        | 80/90 | 10%           |
| 3500K | 5850LM      | OFF         | 5460LM     | 2340LM       | 4680LM     | 3120LM       | 3900LM     | 3900LM       | 3120LM     | 4680LM       | 2340LM     | 5460LM       | OFF       | 5850LM        | 80/90 | 10%           |
| 4000K | 5760LM      | OFF         | 5460LM     | 2340LM       | 4680LM     | 3120LM       | 3900LM     | 3900LM       | 3120LM     | 4680LM       | 2340LM     | 5460LM       | OFF       | 5760LM        | 80/90 | 10%           |

#### 8 FEET 80W-Louver Lens

| CCT   | A           |             | B          |              | C          |              | D          |              | E          |              | F          |              | G         |               | CRI   | Dimming Depth |
|-------|-------------|-------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|-----------|---------------|-------|---------------|
|       | DIRECT 100% | INDIRECT 0% | DIRECT 70% | INDIRECT 30% | DIRECT 60% | INDIRECT 40% | DIRECT 50% | INDIRECT 50% | DIRECT 40% | INDIRECT 60% | DIRECT 30% | INDIRECT 70% | DIRECT 0% | INDIRECT 100% |       |               |
| 3000K | 7620LM      | OFF         | 7280LM     | 3120LM       | 6240LM     | 4160LM       | 5200LM     | 5200LM       | 4160LM     | 6240LM       | 3120LM     | 7280LM       | OFF       | 7620LM        | 80/90 | 10%           |
| 3500K | 7800LM      | OFF         | 7280LM     | 3120LM       | 6240LM     | 4160LM       | 5200LM     | 5200LM       | 4160LM     | 6240LM       | 3120LM     | 7280LM       | OFF       | 7800LM        | 80/90 | 10%           |
| 4000K | 7680LM      | OFF         | 7280LM     | 3120LM       | 6240LM     | 4160LM       | 5200LM     | 5200LM       | 4160LM     | 6240LM       | 3120LM     | 7280LM       | OFF       | 7680LM        | 80/90 | 10%           |




### PRODUCT DIMENSIONS

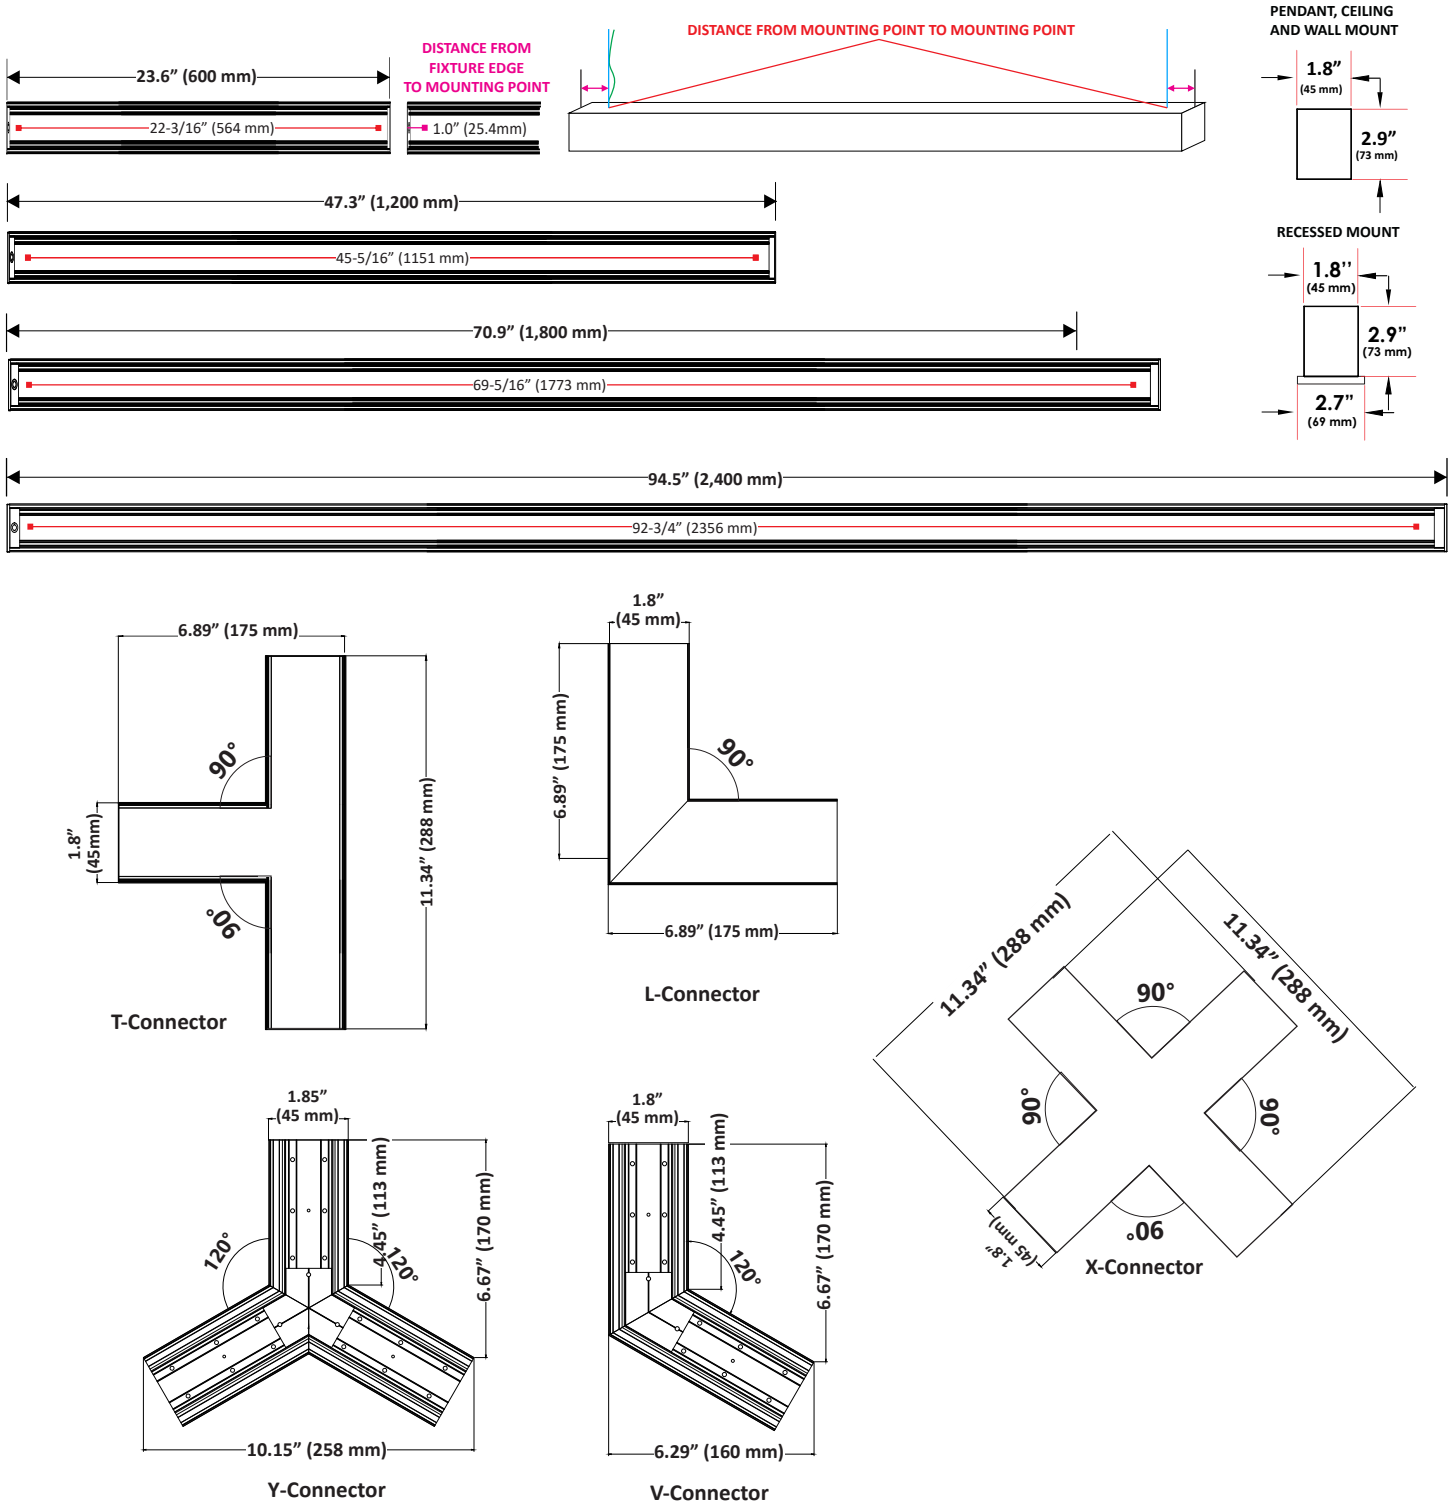

**CROSS SECTIONS**

**DIRECT LIGHT  
CROSS SECTION**

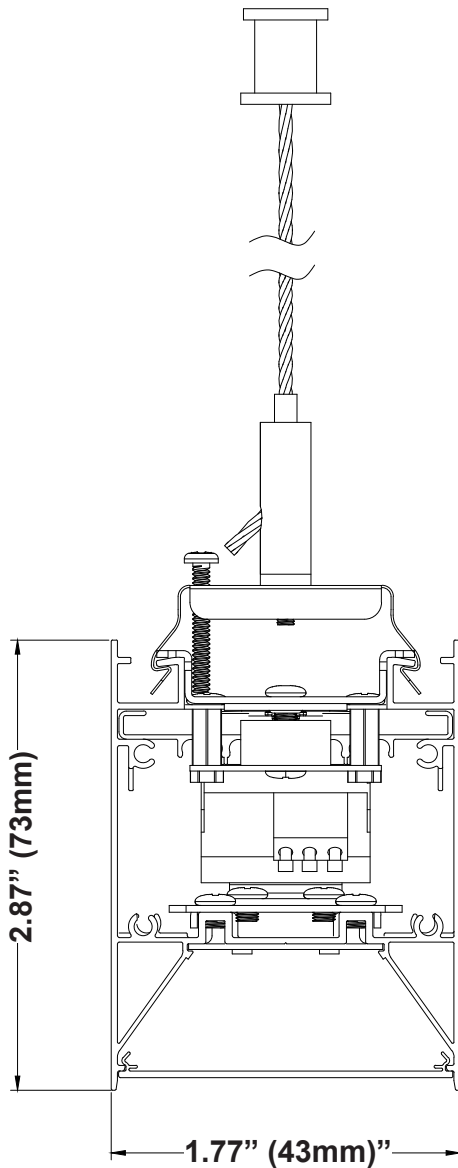

**DIRECT/INDIRECT LIGHT  
CROSS SECTION**

