

JCLNR-MP SERIES



WARNING BEFORE YOU BEGIN READ THESE INSTRUCTIONS COMPLETELY AND CAREFULLY.




- Read instructions carefully before installing.
- Disconnect the power supply before installing or maintenance.
- Make sure the wires have been properly connected before powering on the device.
- Ensure the product has enough space for heat dissipation.
- Ensure the luminaries are never covered by any heat insulation mat or slim layer material at anytime.
- Storage Conditions: Cool & dry conditions.
- Switch off before installation.
- Switch on only after complete installation and examination of the circuit.
- Product modification and improper installation are not valid for warranty.


RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

1.0 INSTALLATION INSTRUCTIONS


1. take down the silicon plugs from the frame.




2. Use a screwdriver to remove the six screws from the holes.




3. Get down the safety cable on the front cover and disconnect the DC connector.

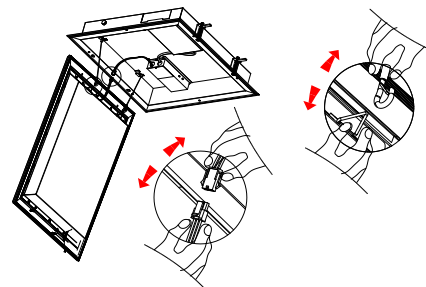


4. Recessed mounting the fixture into the opened hole on ceiling.

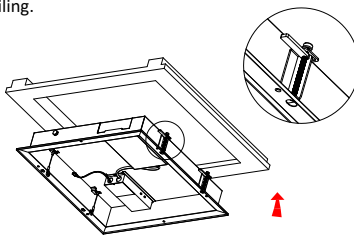


5. Reinstall the safety cable and connect DC connectors.

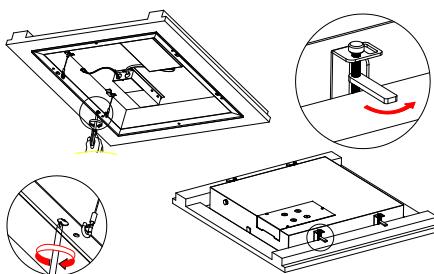


6. Tighten screws to install front cover to backplate.

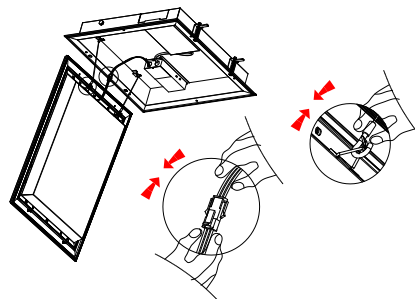


7. Tighten screws to install front cover to backplate.

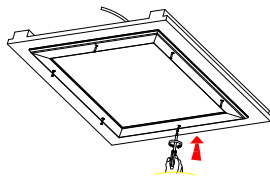

8. Move back the silicon plugs.

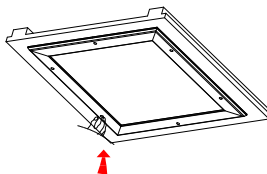

9. Wire the fixture and then power on.

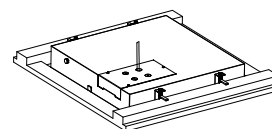

Live wire : L
Neutral wire: N
Ground wire: ⚡
DIM+: L1
DIM-: L2

