

# JEM-WP SERIES

## MR-16 WET LOCATION SEMI-RECESSED POLYCARBONATE EMERGENCY LIGHT



### ILLUMINATION

- Two fully adjustable, semi-recessed ultra bright, 7.2 watt
- MR-16 halogen lamp heads standard.
- High performance MR16 halogen lamps with smooth metallized reflector and glass lens for optimal light distribution.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical connections.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.


### OPTIONS

- HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications.
- CW: Optional internal heater and battery blanket for extreme cold temperature applications, (-25°C – 50°C MR-16 halogen) (-25°C – 40°C LED).
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- LED: 3.3W high performance MR-16 base LED lamps for increased center-to-center spacing.
- CEC: Certified to CEC under Title 20 Regulations.
- PLED: 5.0W high performance MR-16 base LED lamps for premium center-to-center spacing.

### WARRANTY AND LISTINGS

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (20°C – 40°C).

### PRODUCT DIMENSIONS

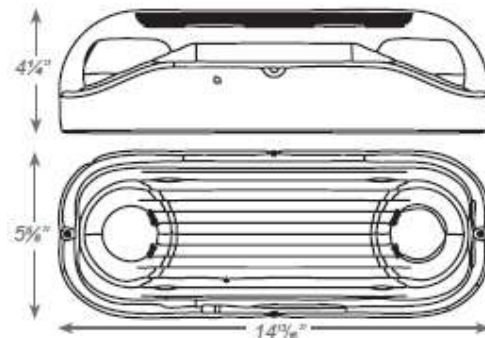

### ORDERING INFORMATION

Product Series	Housing Color	Battery	Options
JEM-WP	Blank (Gray) BK (Black)	Blank (AC Only) EM (Battery Backup Cold Weather Standard)	HTR (Internal Heater) CW (Internal Heater with Battery Blanket) LED (3.3W High Lumen White LED Lamps) PLED (5.0W High Lumen White LED Lamps) CEC (Title 20 Compliant)



Miami, FL USA - info@jademar.com  
T: 305.640.0465 - F: 305.640.0468  
**WWW.JADEMAR.COM**



Information contained herein is subject to change without notice.  
Values are nominal.  
Revised 08/2022