

SPECIFICATION SUBMITTAL DETAIL

Project Name/Type:		Date:
Catalog/Part #:		

LED EXIT & EMERGENCY COMBINATION UNIT WITH ADJUSTABLE OPTICS



ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1.0 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized ref lector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED adjustable optics for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes.
- EZ snap-out Chevron directional indicators.

ORDERING INFORMATION

For Example: **JESC-AO-SF-R-WH-RC-SDT**

Product Series	No of Faces	Letter Color	Housing Color	Remote Capabilities	Other Options
JESC-AO	SF (Single Face) DF (Double Face)	R (Red) G (Green)	WH (White) BK (Black)	RC = Remote Capable (Standard)	SDT (Self Diagnostic) CST (Custom Wording)

FIELD INSTALLED OPTIONS

JEM-RH-1	Single Head Emergency Light
JEM-RH-2	Double Head Emergency Light


OPTIONS

- RC: Remote capacity of up to 3.0 watts.
- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- Custom: Signs available with requested "special" wording.

WARRANTY AND LISTINGS

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

PRODUCT DIMENSIONS

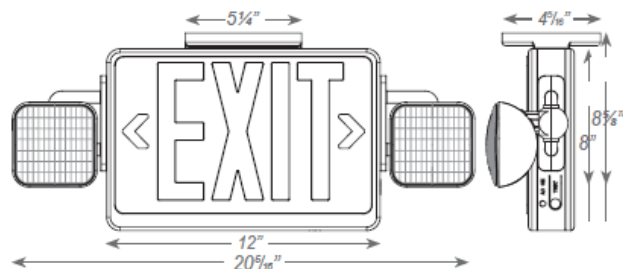

Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Values are nominal.
Revised 05/2022