

JFMD SERIES FLUSH MOUNT DECORATIVE LUMINAIRE

PRODUCT DESCRIPTION

Introducing the **JFMD Flush Mount Decorative Luminaire**: The Perfect Blend of Elegance and Performance!

Illuminate your space with the JFMD Flush Mount Decorative Luminaire, a stylish and versatile lighting solution designed to enhance any environment. Crafted with precision using die-formed cold-rolled steel housing, this pendant-type luminaire is built to last, ensuring durability and reliability for years to come.

STANDARD FEATURES

Construction and Materials

- Die-formed Cold-rolled Steel
- Finish Option: Satin Nickel, Rubbed Bronze

Optical System

- Shade: High Transmission Acrylic Create Excellent Light Distribution and Uniformity

Electrical System

- LED Driver: 120V Triac Dimming Type or 120V-277V, 0-10V Dimming Type
- Min. Dimming Level: 3%
- High Power Factor (> 0.98), Low THD (< 10%)

Lamp

- LED Type: Built-in
- LM80, TM21 : 60,000 hours Rating
- LED CRI > 90 per JA8 Standard
- Flicker Free: Meets JA10 Standard

Certifications and Compliance

- ETL/cETL Listed, CEC Listed Meets T24 JA8

Warranty: 5 Years Warranty on Driver and LED Module



TruBlu
SILVAIR

CASAMBI

PERFORMANCE SUMMARY

Input Power:	11W/ 18W/ 24W/ 30W/ 35W
Efficacy:	100 lm/W
CCT:	3000K
CRI:	>90
Input Voltage:	120V & 120-277VAC
Dimming:	0-10V Dimming Standard/Triac Dimming
Construction:	Die-formed Cold-Rolled Steel Housing
Surge Protection:	4kV Standard
Lifetime Based on TM21:	L80 @ ≥ 60,000 Hrs
Warranty:	5 Year Limited

MOUNTING OPTIONS




SINGLE PENDANT MOUNT



TRIPLE PENDANT MOUNT


PRODUCT DIMENSIONS

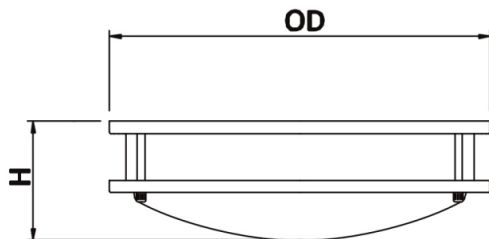


Model	OD X H	Model	OD X H
JFMD-10-11W-120V	10.4" x 4.2"	JFMD-14-24W	14.5" X 4.6"
JFMD-10-18W-120V	10.4" x 4.2"	JFMD-16-30W	16.0" X 4.9"
JFMD-12-18W-120V	11.8" x 4.2"	JFMD-18-35W	17.8" X 4.9"



Quotations: quotes@jademar.com
To place an order: orders@jademar.com
Tel: (305) 640.0465 | Fax: (305) 640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Revised 09/2024

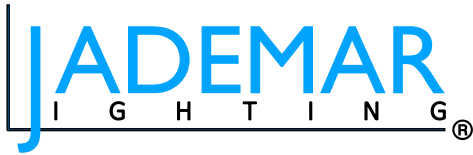

SPECIFICATION SUBMITTAL DETAIL

PROJECT NAME:	
MODEL NUMBER:	
DATE:	

JFMD SERIES FLUSH MOUNT DECORATIVE LUMINAIRE

ORDERING INFORMATION / EXAMPLE: **JFMD-10-11W-120-30K-TRI-SR-NLC-BZ-SPM**

JFMD			30K				
Product Series	Diameter/Wattage	Input Voltage	CCT	Dimming	Control Options	Housing Colors	Mounting Options
JFMD	10-11W 10-18W 12-18W 14-24W 16-30W 18-35W	120 120VAC Blank 120-277VAC	30K 3000K	Blank TRI 0-10V Dimming TRIAC Dimming	CB-NLC CASAMBI Bluetooth Control System SR-NLC DLC Listed SIG Certified Silvair BLE Mesh Network TruBlu Bluetooth Lighting	SN Satin Nickel BZ Rubbed Bronze	Blank Flush Ceiling Mount SPM Single Pendant Mount TPM Triple Pendant Mount

LUMEN PERFORMANCE AND ELECTRICAL DATA

Product Number	JFMD-10-11W	JFMD-10-18W	JFMD-12-18W	JFMD-14-24W	JFMD-16-30W	JFMD-18-35W
Maximum Dimensions	ø10"x4.2"		11.8" x 4.2"	14.5" X 4.6"	16.0" X 4.9"	17.8" X 4.9"
Wattage	11W	18W	18W	24W	30W	35W
Nominal Efficacy (lm/W)	77	67	73	87	82	86
Lumen Output (lm)	850	1,200	1,310	2,000	2,300	3,000
Input Voltage	120V			120-277V		
CCT	3000K					
CRI	>90					
THD	<10%					
Power Factor	>0.98					
Dimming	0-10V Dimming Standard/Triac Dimming					
Controls Options	CASAMBI Bluetooth Network Lighting Control System and SR-NLC DLC Listed SIG Certified Silvair BLE Mesh Network - TruBlu Bluetooth Lighting Control System					
Construction	Die-formed Cold-Rolled Steel Housing					
LED L70 Lifetime (TM21 Calculated)	L80 @ ≥60,000 Hrs					
Certifications	ETL/cETL Listed, CEC Listed Meets T24 JA8					
Limited Warranty	5 Yrs Warranty					



Quotations: quotes@jademar.com
To place an order: orders@jademar.com
Tel: (305) 640.0465 | Fax: (305) 640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Revised 09/2024