



### FLEXIBLE TRIMLESS RECESSED PROFILE

*This product cut to order but not factory installed/assembled/made, due to the product nature LED strip must be installed after the aluminium flex set in the ceiling/wall*


#### STANDARD FEATURES

- Non-yellowing silicon diffuser comes with excellent glare control.
- Lens comes with max length of 164 feet.
- With trimless recessed frame design, luminaire will integrate perfectly with ceiling or wall.
- Extruded AL6063-T5 aluminum profile.
- 75cm/30" diameter minimum bend

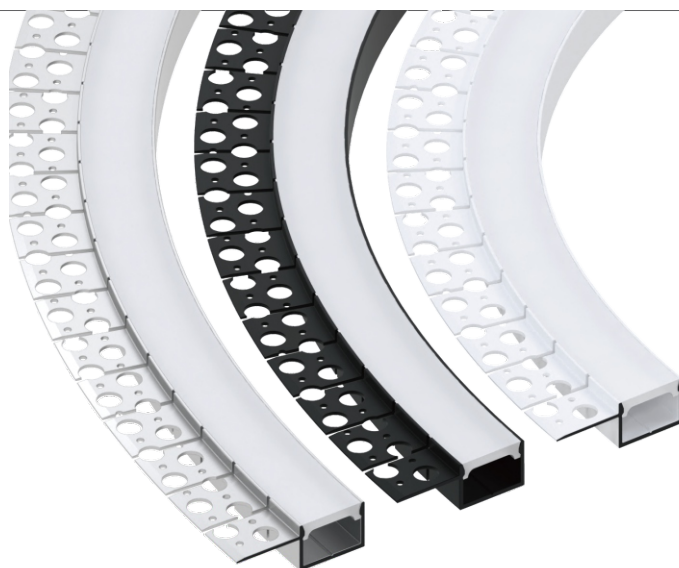


TRIMLESS RECESSED

### INSTALLATION

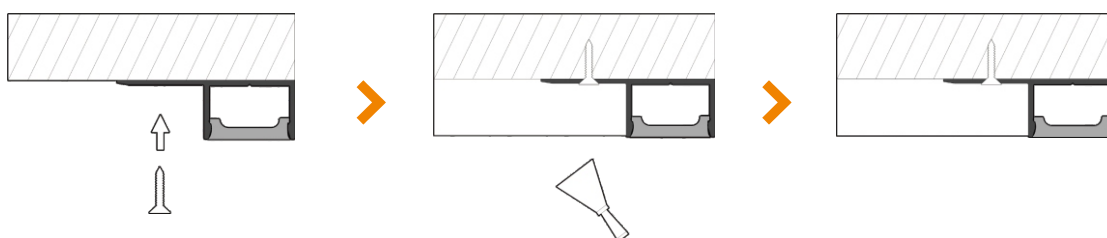

### DIMENSION

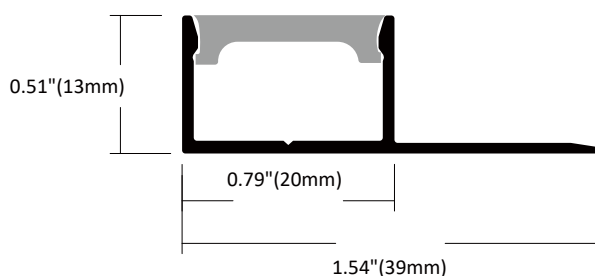

### APPLICATION



### SPECIFICATION AND SUBMITTAL SHEET

|                       |  |                |  |
|-----------------------|--|----------------|--|
| PROJECT NAME:         |  | REP AGENCY:    |  |
| LOCATION:             |  | APPROVAL BY:   |  |
| SPECIFYING ARCHITECT: |  | DATE:          |  |
| CONTACT NAME:         |  | CONTACT EMAIL: |  |

#### STEP 1

**SELECT PROFILE TYPE** ORDERING EXAMPLE: **JIL-FLEX-L877-FA-9.8FT-300L-DL**

|                |   |                   |   |                          |   |                                          |
|----------------|---|-------------------|---|--------------------------|---|------------------------------------------|
| JIL-FLEX-L877  | - | FA                | - |                          | - |                                          |
| PROFILE SERIES |   | ASSEMBLY          |   | LENGTH                   |   | LUMEN/FT                                 |
| JIL-FLEX-L877  |   | FA Field Assembly |   | XXFT* Specify the Length |   | xL Replace "x" with the desired lumen/ft |

Matches with 20mm or less width JS Stripes.

This product cut to order but not factory installed/assembled/  
made, due to the product nature LED strip must be installed  
after the aluminium flex set in the ceiling/wall

\* Replace XX with desired  
value of FT. Max single  
piece length 328 Ft

|                   |   |               |
|-------------------|---|---------------|
| DL                | - |               |
| DIFFUSER TYPE     |   | IP PROTECTION |
| DL Diffused Lens* |   | Blank IP20    |

\* Lens & End caps comes with the extrusion as the  
standard accessories. For the seamless longer lens  
please refer to DNP. Max length is 164Ft

#### STEP 2

**SELECT A DRIVER (REQUIRED)**  
Refer to driver brochure [online](#)

#### STEP 3

**SELECT CONTROL OPTIONS**  
Refer to control options page [online](#).

**SILVAIR CASAMBI**

### SIDE BENDING LED STRIP OPTIONS

| Part #                 | Product Description                                                                   |
|------------------------|---------------------------------------------------------------------------------------|
| JS-PRO-DS8160-24V-15MM | Pro Series LED Strip, 27K/30K/35K/40K/50K/65K, 15mm, 6.8W/ft, 24VDC                   |
| JDS8320-15MM           | Pro Series LED Strip, TW (Tuneable white) 15mm, 6.4W/ft, 24VDC                        |
| JDA168RGB-15MM         | Pro Series LED Strip, RGB, 15mm, 6.8W/ft, 24VDC                                       |
| JDMA120RGB-15MM        | Pro Series LED Strip, DMX512 RGB, 15mm, 8.40W/ft, 24VDC                               |
| CABLE CONNECTORS       | 2 PIN / 3 PIN / 4 PIN / 5 PIN Electrical Connector; 22AWG IP65 Male/Female Connectors |



