



FLEXIBLE TRIMLESS RECESSED PROFILE

This product cut to order but not factory installed/assembled/made, due to the product nature LED strip must be installed after the aluminium flex set in the ceiling/wall


STANDARD FEATURES

- Non-yellowing silicon diffuser comes with excellent glare control.
- Lens comes with max length of 164 feet.
- With trimless recessed frame design, luminaire will integrate perfectly with ceiling or wall.
- Extruded AL6063-T5 aluminum profile.
- 75cm/30" diameter minimum bend

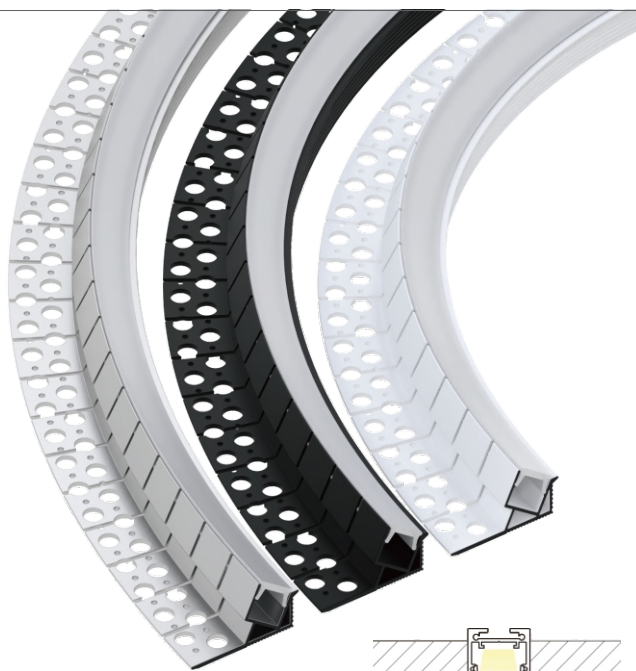


TRIMLESS RECESSED


INSTALLATION

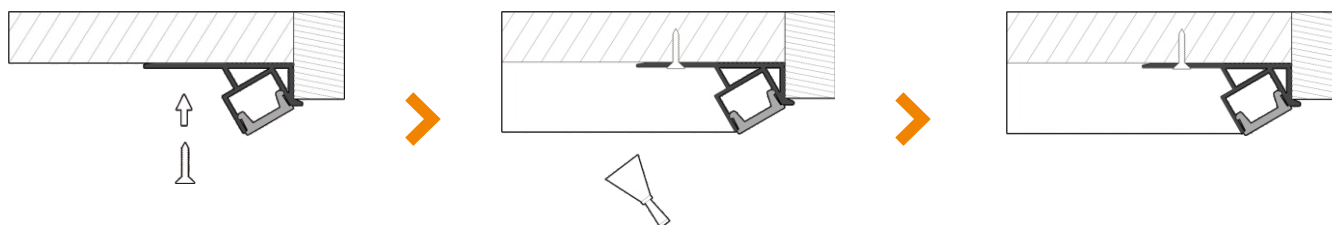

DIMENSION

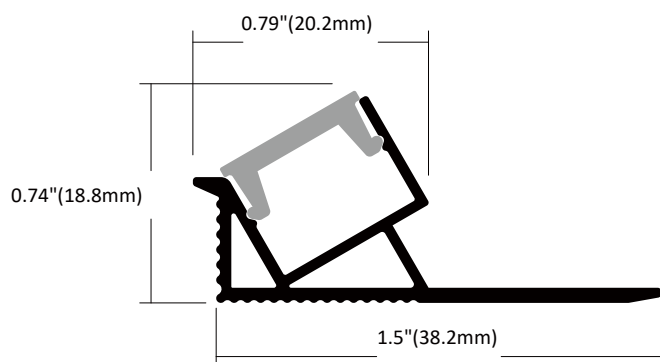

APPLICATION

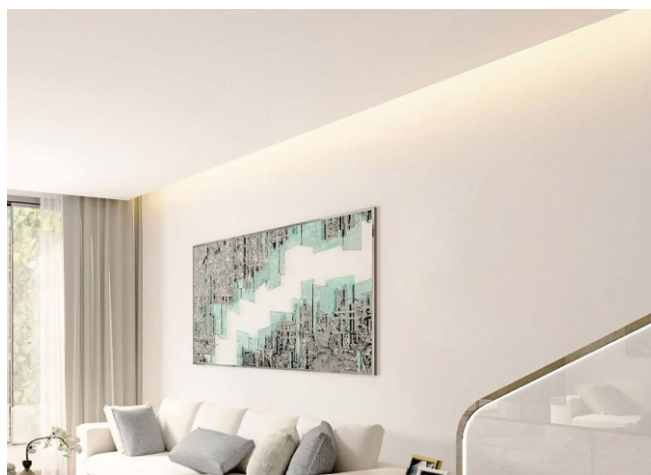

SPECIFICATION AND SUBMITTAL SHEET

PROJECT NAME:		REP AGENCY:	
LOCATION:		APPROVAL BY:	
SPECIFYING ARCHITECT:		DATE:	
CONTACT NAME:		CONTACT EMAIL:	

STEP 1

SELECT PROFILE TYPE ORDERING EXAMPLE: **JIL-FLEX-L885-FA-9.8FT-300L-DL**

JIL-FLEX-L885	-	FA	-		-	
PROFILE SERIES		ASSEMBLY		LENGTH		LUMEN/FT
JIL-FLEX-L885		FA Field Assembly		XXFT* Specify the Length		xL Replace "x" with the desired lumen/ft

Matches with 24.3mm or less width JS Stripes.

This product cut to order but not factory installed/assembled/
made, due to the product nature LED strip must be installed
after the aluminium flex set in the ceiling/wall

* Replace XX with desired
value of FT. Max single
piece length 328 Ft

DL	-	
DIFFUSER TYPE		IP PROTECTION
DL Diffused Lens*		Blank IP20

* Lens & End caps comes with the extrusion as the
standard accessories. For the seamless longer lens
please refer to DNP. Max length is 164Ft

STEP 2

SELECT A DRIVER (REQUIRED)

Refer to driver brochure [online](#)

STEP 3

SELECT CONTROL OPTIONS

Refer to control options page [online](#).

SILVAIR CASAMBI

SIDE BENDING LED STRIP OPTIONS

Part #	Product Description
JS-PRO-DS8160-24V-15MM	Pro Series LED Strip, 27K/30K/35K/40K/50K/65K, 15mm, 6.8W/ft, 24VDC
JDS8320-15MM	Pro Series LED Strip, TW (Tuneable white) 15mm, 6.4W/ft, 24VDC
JDA168RGB-15MM	Pro Series LED Strip, RGB, 15mm, 6.8W/ft, 24VDC
JDMA120RGB-15MM	Pro Series LED Strip, DMX512 RGB, 15mm, 8.40W/ft, 24VDC
CABLE CONNECTORS	2 PIN / 3 PIN / 4 PIN / 5 PIN Electrical Connector; 22AWG IP65 Male/Female Connectors



A large grid of graph paper, consisting of 20 columns and 15 rows of squares. In the top right corner, there is a scale bar labeled "1FT" with a vertical line segment indicating the height of one square.