


JNNR40

Design Ideas

for commercial projects

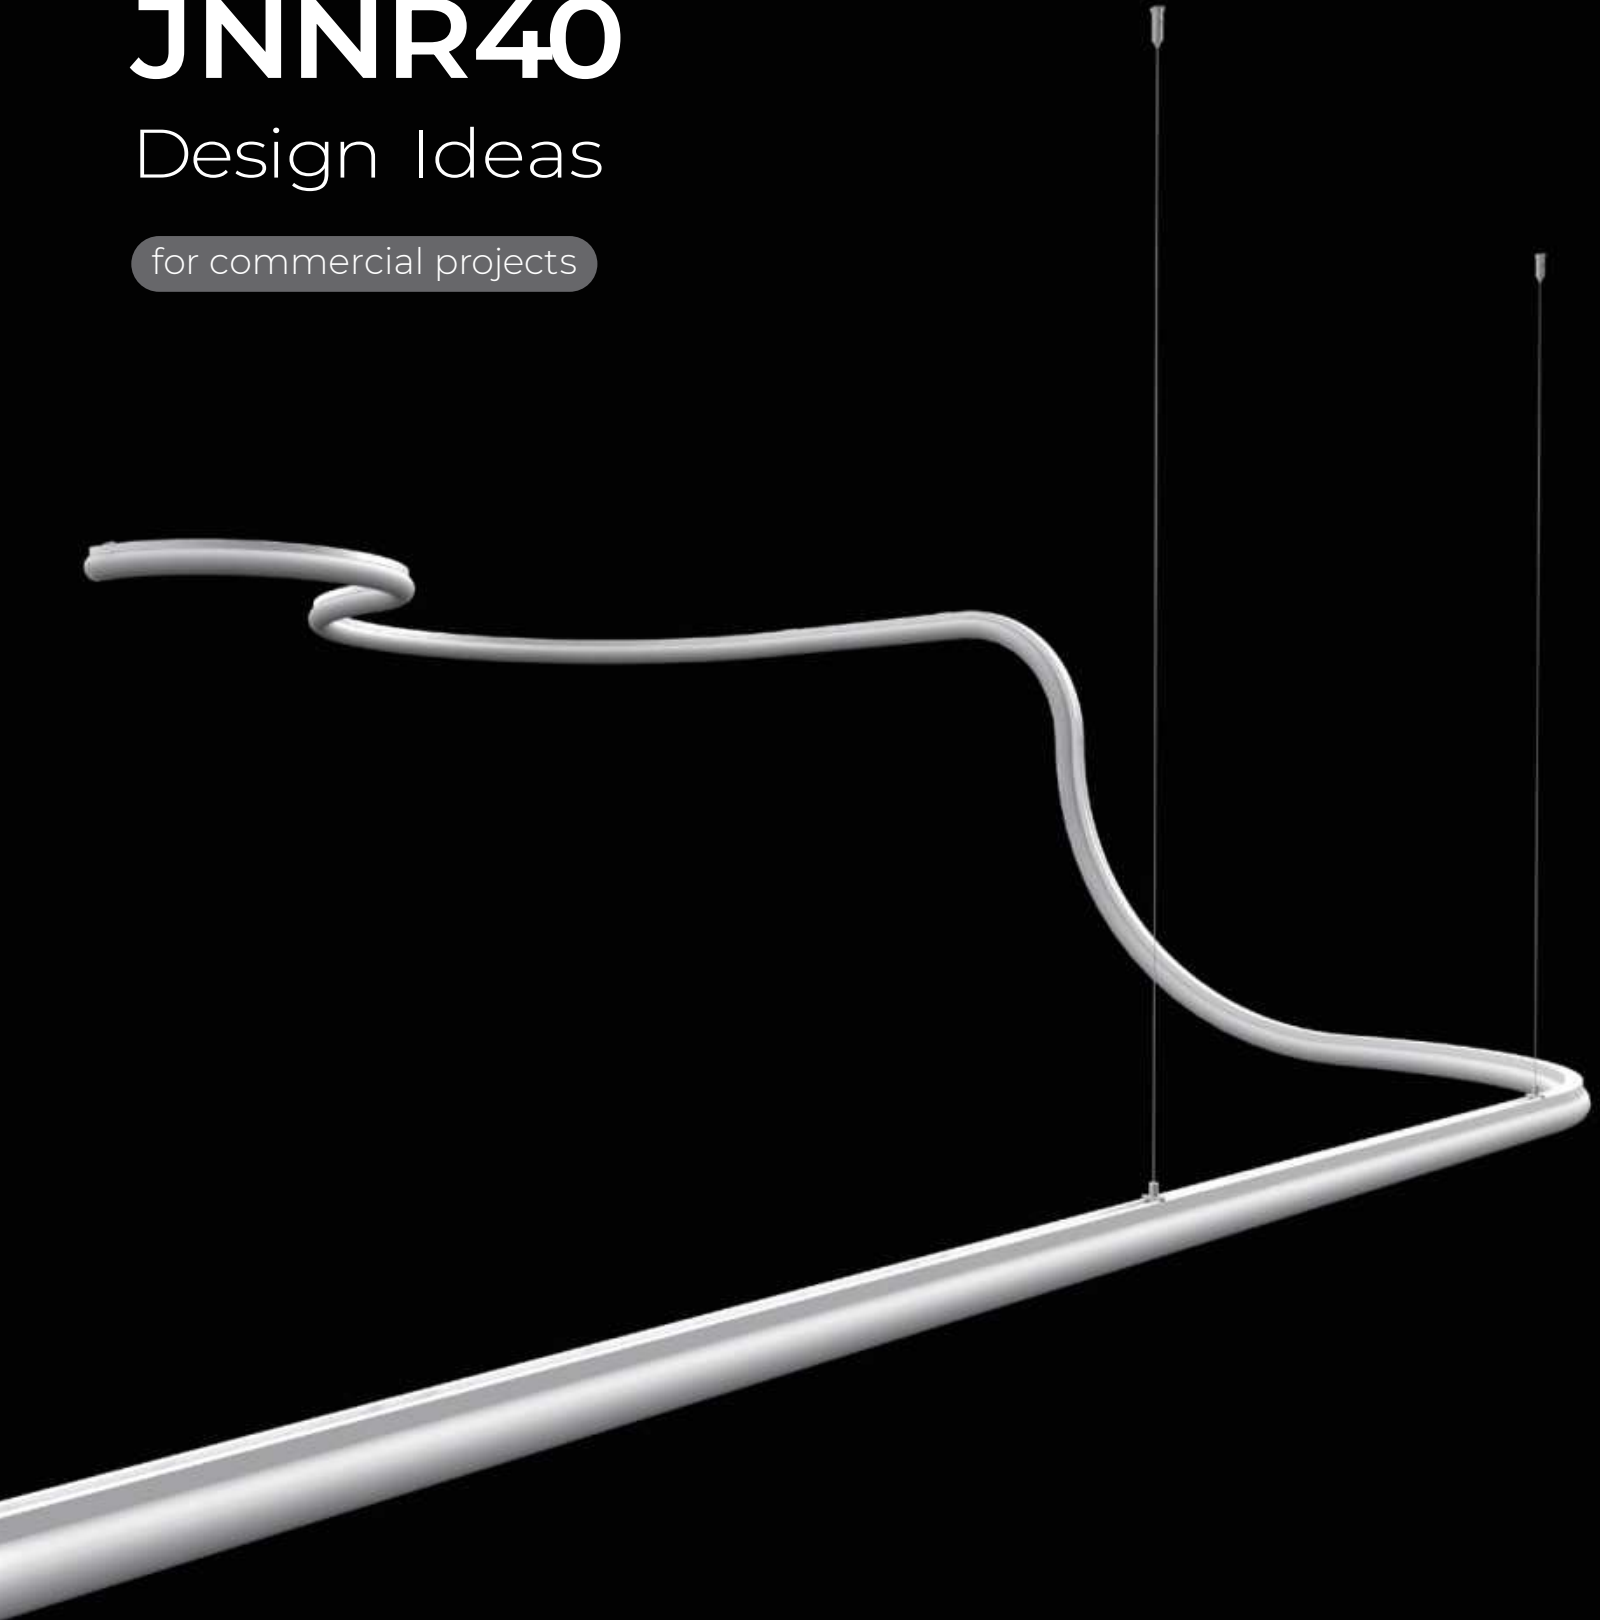

PREFACE

Welcome to this Design Ideas manual.

This manual aims to assist designers in comprehending the physical characteristics of the product and the photoelectric parameters of the neon light body. By providing this information, we hope to enhance designers' design considerations and inspire creative case studies.

For more information on optional configurations for the product and its accessories, please refer to the manual. These configurations expand the possibilities of your designs.

We eagerly anticipate collaborating with you to develop even more innovative accessories, simplifying the design process.

Wearable System

Side Bend 120°

- $\phi = 0.5\text{m}$
- $\phi = 1\text{m}$
- $\phi = 1.5\text{m}$



Side Bend 45°

- $\phi = 0.5\text{m}$
- $\phi = 1\text{m}$
- $\phi = 1.5\text{m}$



Side Bend 90°

- $\phi = 0.5\text{m}$
- $\phi = 1\text{m}$
- $\phi = 1.5\text{m}$



Ceiling-mounted installation kit



Line

- $L = 0.5\text{m}$
- $L = 1\text{m}$



Side Bend 180°

- $\phi = 0.5\text{m}$
- $\phi = 1\text{m}$
- $\phi = 1.5\text{m}$



Inward Bend 90°

- $\phi = 0.5\text{m}$
- $\phi = 1\text{m}$



Outward Bend 90°


- $\phi = 0.5\text{m}$
- $\phi = 1\text{m}$



Splicing components



Lifting Kit

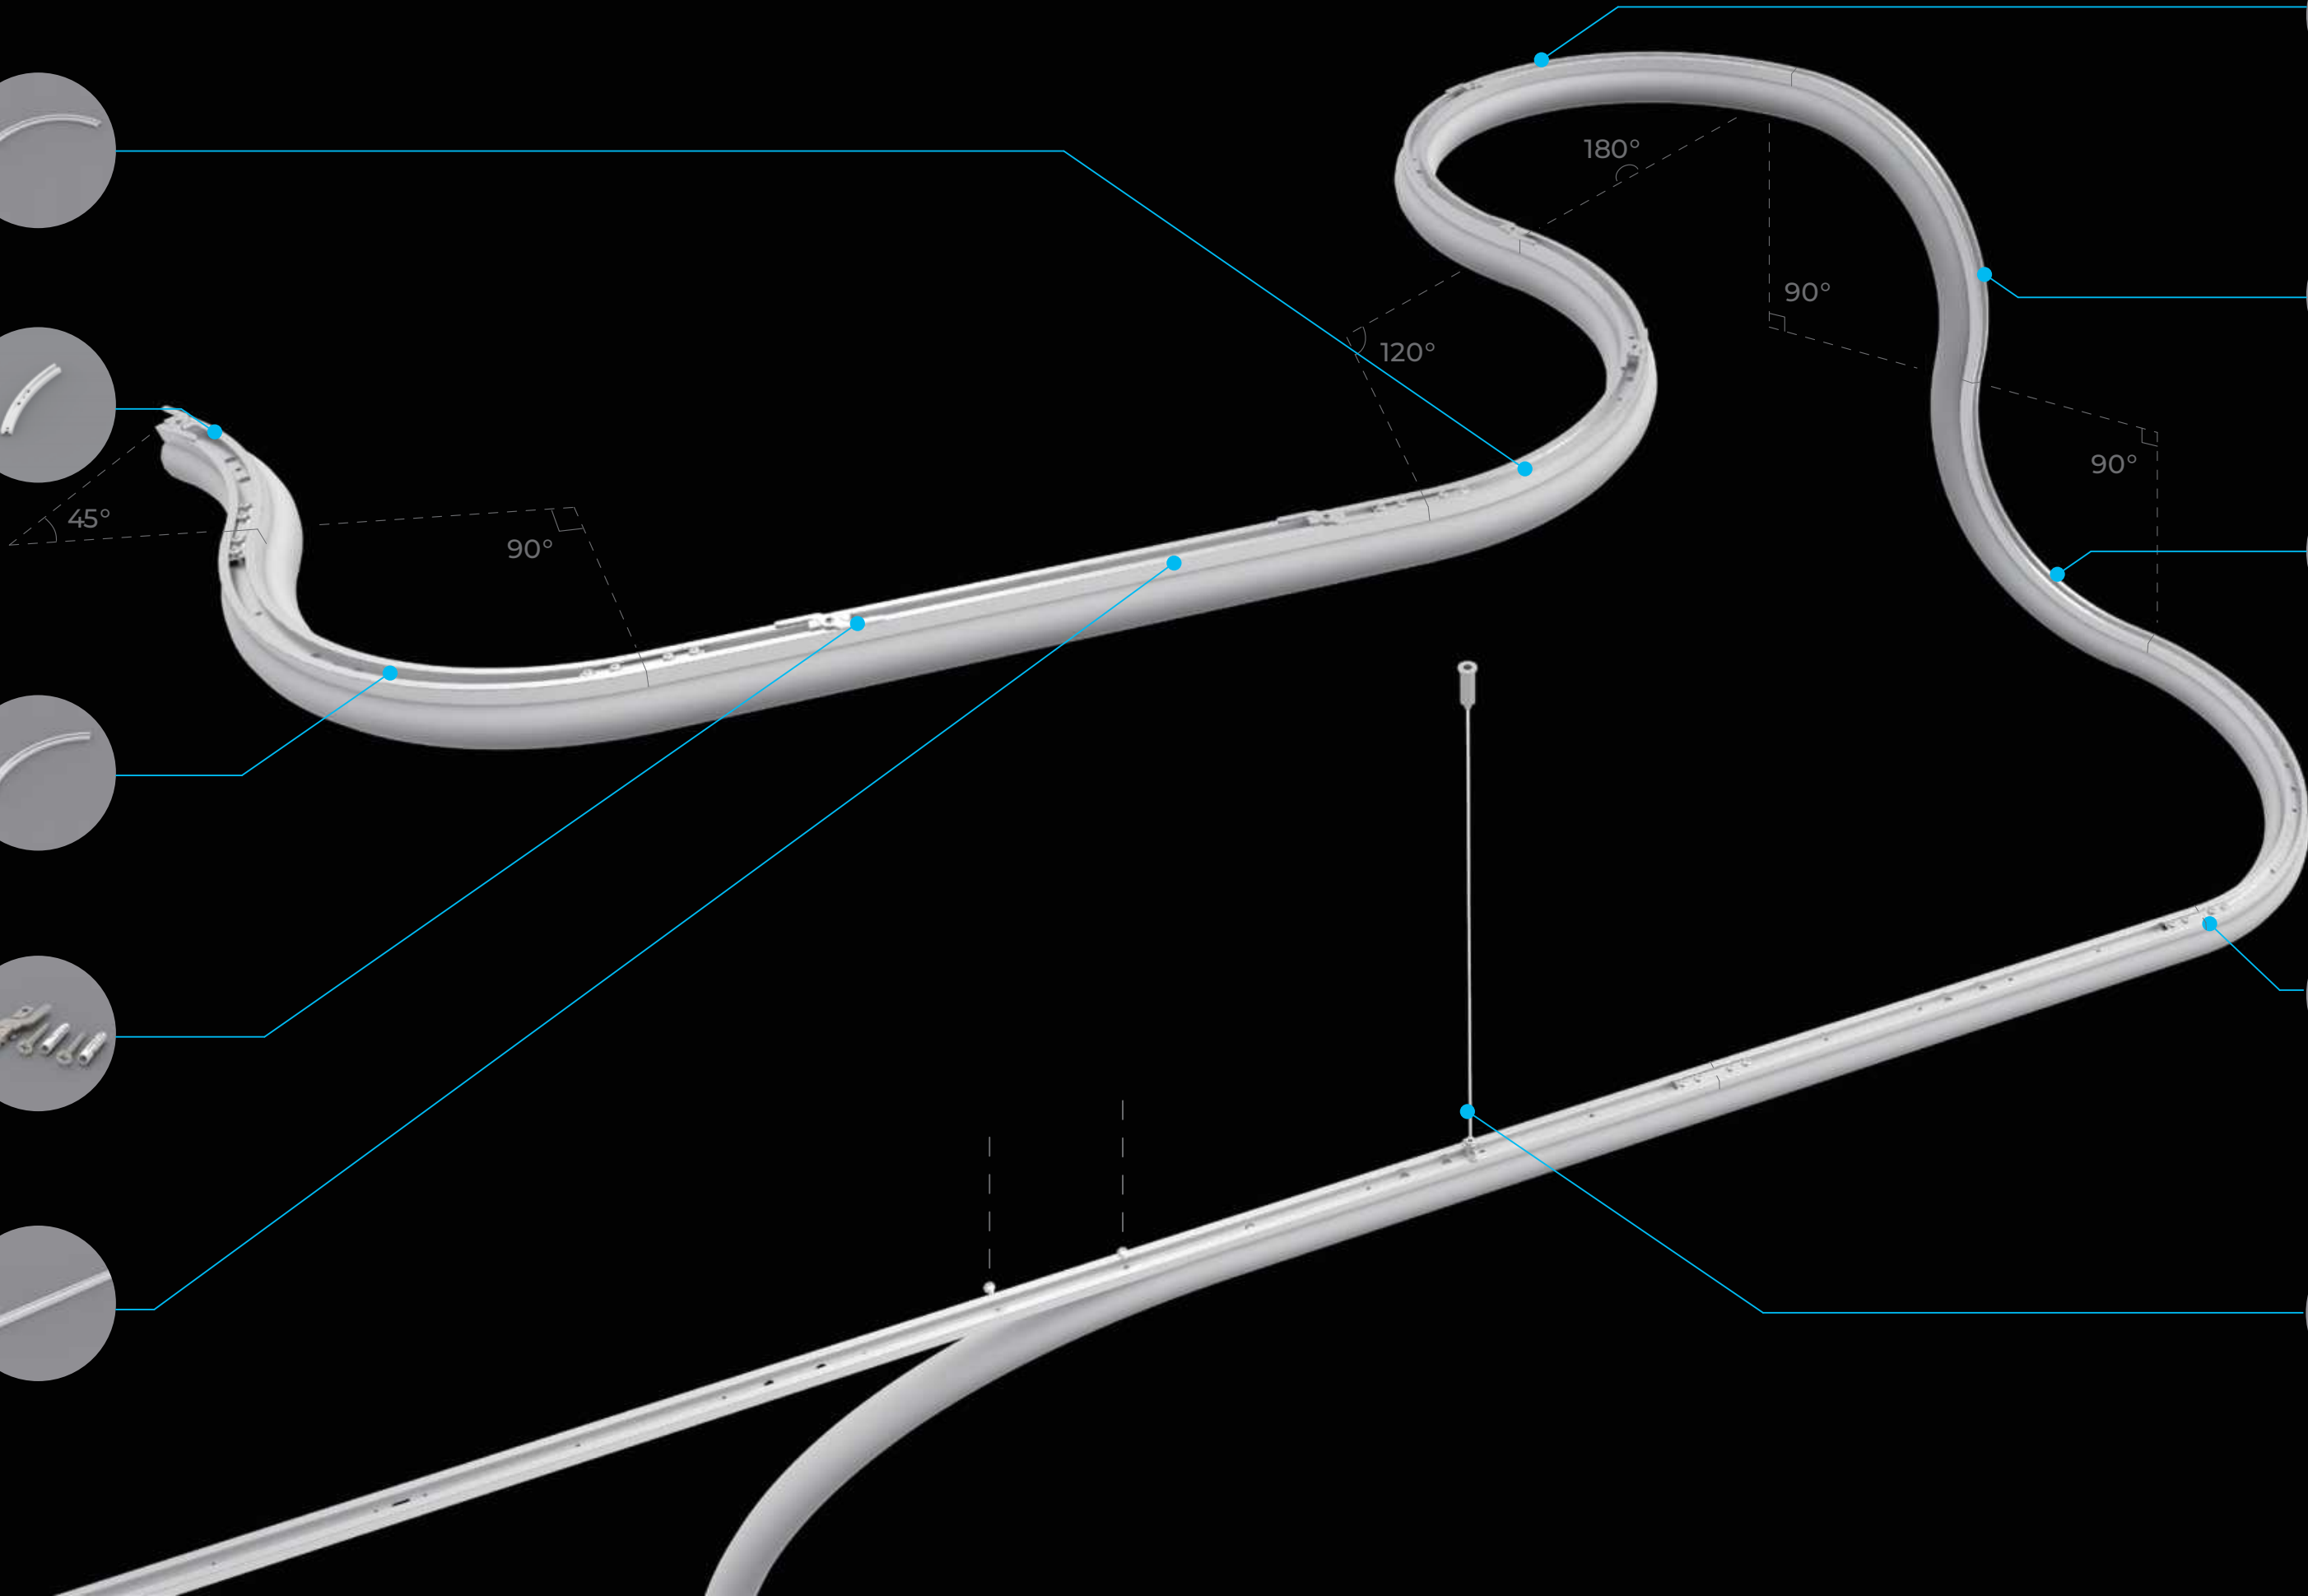

Accessories list

Side bend

Outward bend

Inward bend

Line Profile

$\phi = 0.5\text{ m}$	AS-NNR40WS45-05 L = 0.196 m	AS-NNR40WS90-05 L = 0.392 m	AS-NNR40WS120-05 L = 0.523 m	AS-NNR40WS180-05 L = 0.785 m
$\phi = 1\text{ m}$	AS-NNR40WS45-10 L = 0.392 m	AS-NNR40WS90-10 L = 0.785 m	AS-NNR40WS120-10 L = 1.046 m	AS-NNR40WS180-10 L = 1.57 m
$\phi = 1.5\text{ m}$	AS-NNR40WS45-15 L = 0.588 m	AS-NNR40WS90-15 L = 1.177 m	AS-NNR40WS120-15 L = 1.57 m	AS-NNR40WS180-15 L = 2.355 m

AS-NNR40WO90-05 L = 0.392 m	AS-NNR40WI90-05 L = 0.392 m	AS-NNR40WL0-05 L = 0.5 m
AS-NNR40WO90-10 L = 0.785 m	AS-NNR40WI90-10 L = 0.785 m	AS-NNR40WL0-10 L = 1 m

Installation Accessories

AS-NNR40A3-25 Splicing components	AS-NNR40A1-25 Ceiling-mounted installation kit	AS-NNR40A2-25 Lifting Kit	Screw kit
---	--	---	----------------------------------

Basic Modules


Line



Curve



Geometry

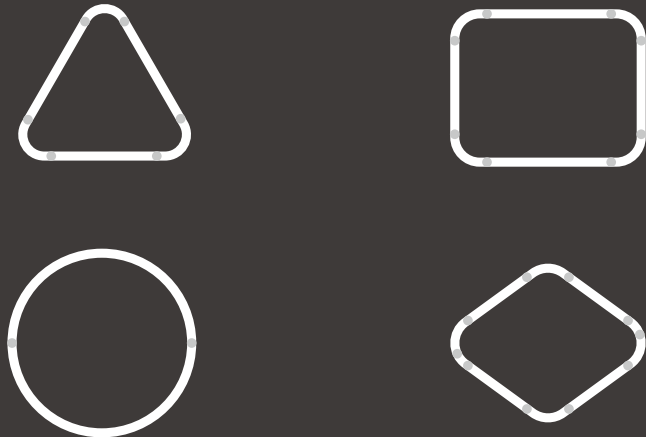

Letter



3D



** This page only provides design thinking. You can come up with even more creative designs.





Line

Applications

360 NEON · JNNR40

Application:	Line Application
Installation:	Hoisting Mounted
Profile Length:	2m
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m

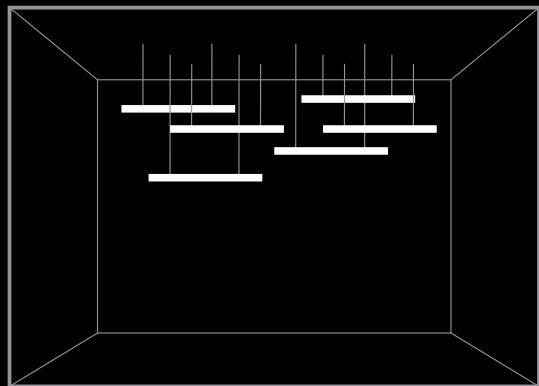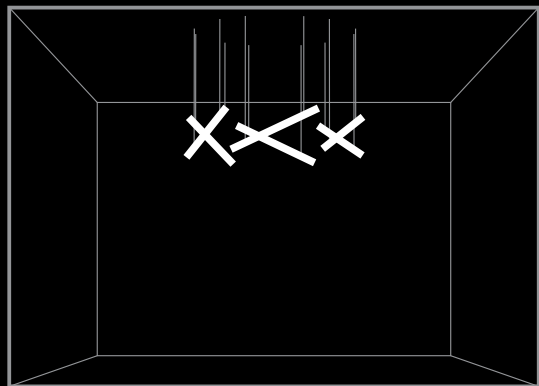

Profile & Neon: 5m (Max)





Line

Applications

360 NEON · JNNR40

Application:	Line Application
Installation:	Ceiling Mounted
Profile Length:	1m / 0.5m
CCT:	3000K
Voltage:	24V
Power:	18W/m
Luminous Flux:	2052 LM/m

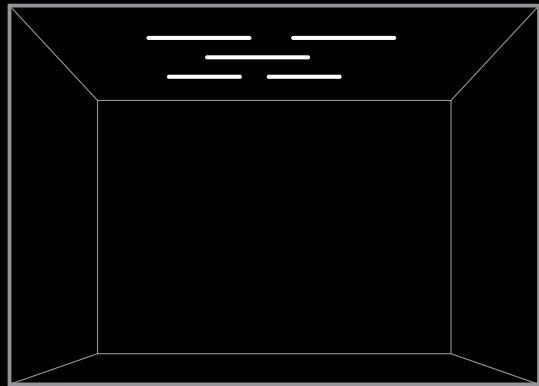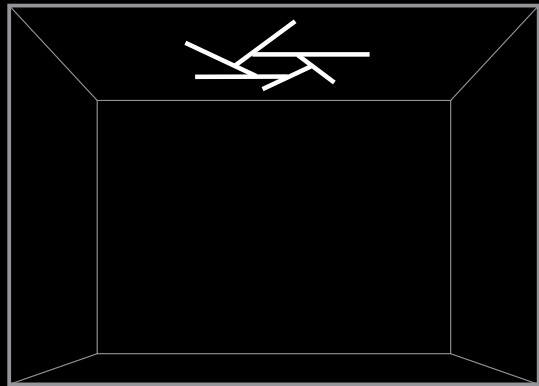





Profile & Neon: 5m (Max)



Curved Applications

360 NEON · JNNR40

Application:	Curve Application
Installation:	Ceiling Mounted
Profile Length:	L=2.355m
CCT:	3000K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2090 LM/m

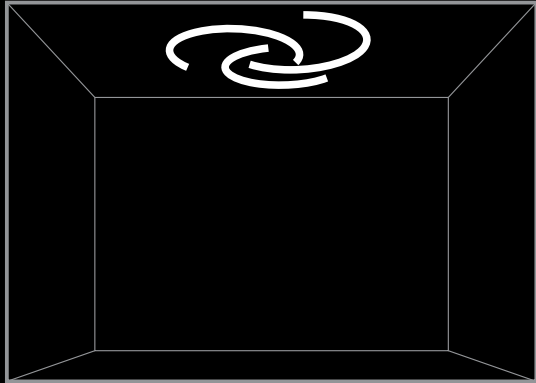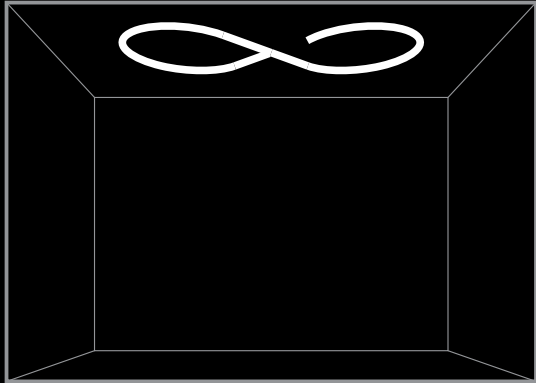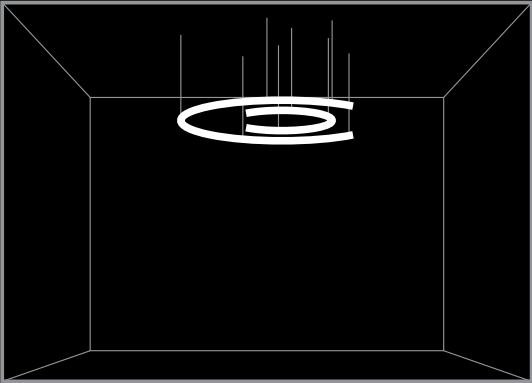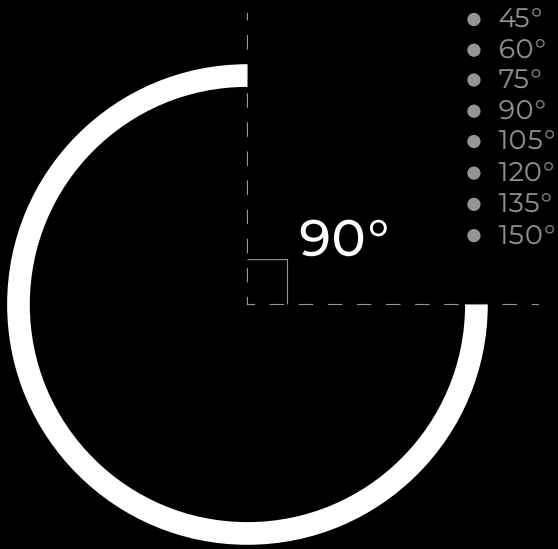

Profile & Neon





φ 0.5m
φ 1m
φ 1.5m



Curved Applications

360 NEON · JNNR40

Application:	Curve Application
Installation:	Hoisting Mounted
Profile Length:	LA=2.1m LB=1.05m
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m

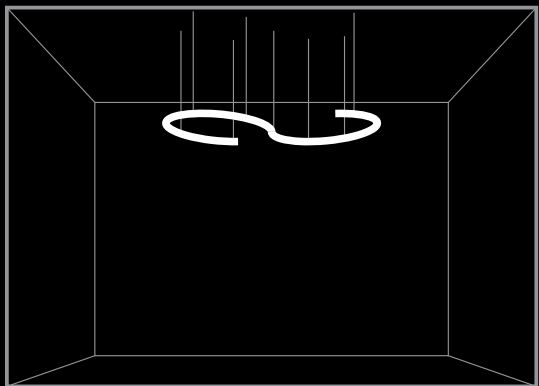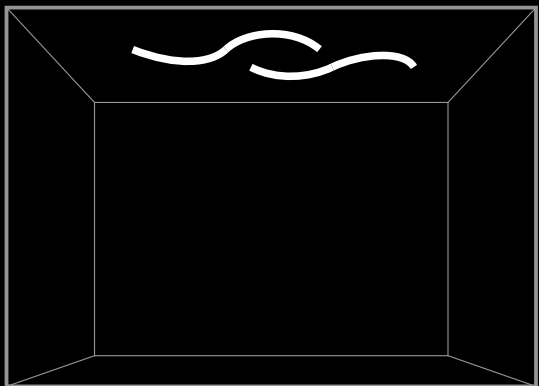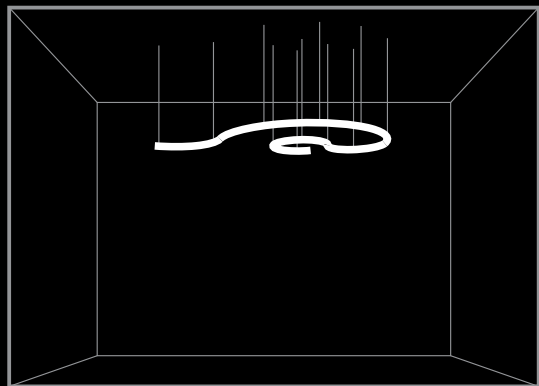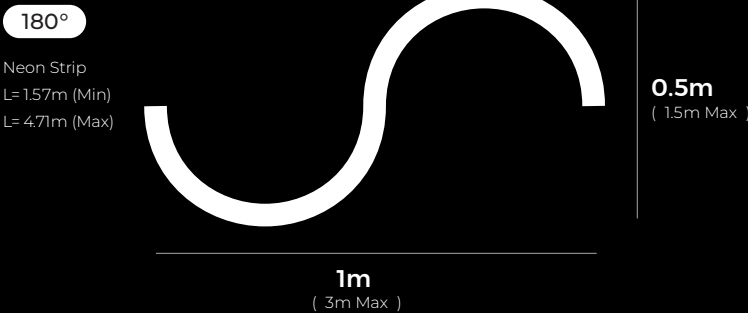







Geometry

Applications

360 NEON · JNNR40

Application:	Geometry Application
Installation:	Hoisting
Profile Length:	L=3.14m
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m

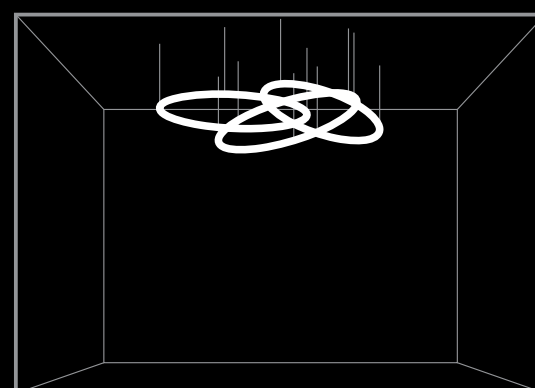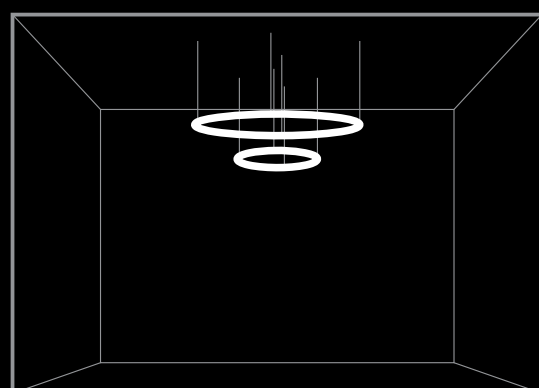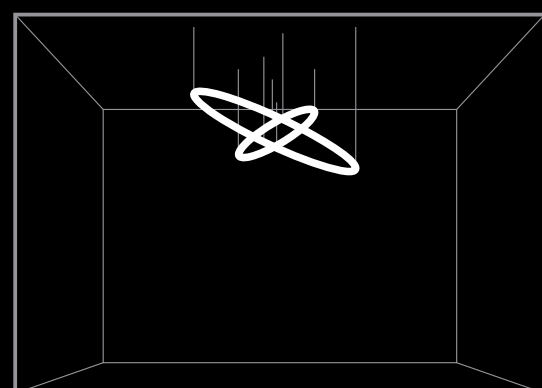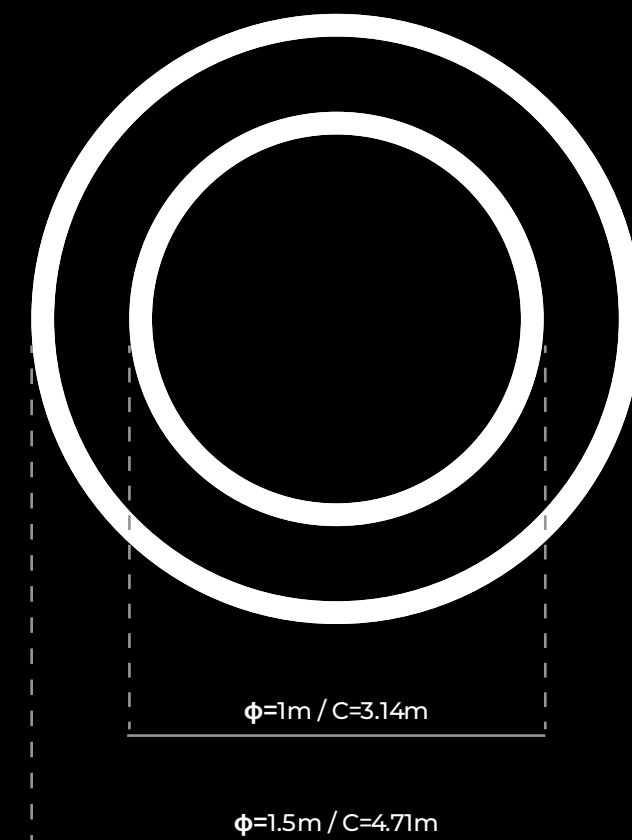




Geometry



Applications

360 NEON · NNR40

Application:	Geometry Application
Installation:	Hoisting
Profile Length:	L=7.14m
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m

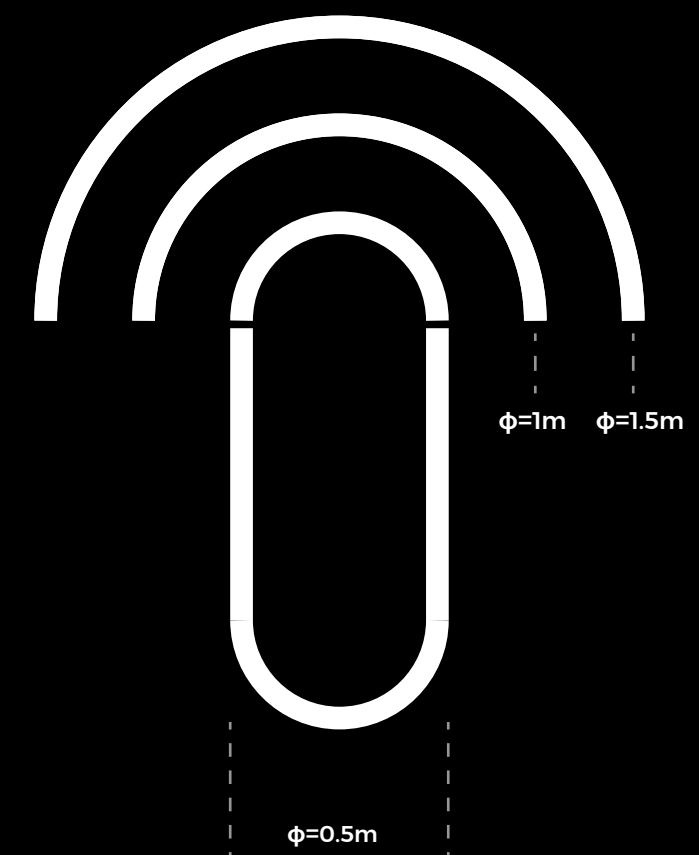

Profile & Neon: 2.57m(Min)



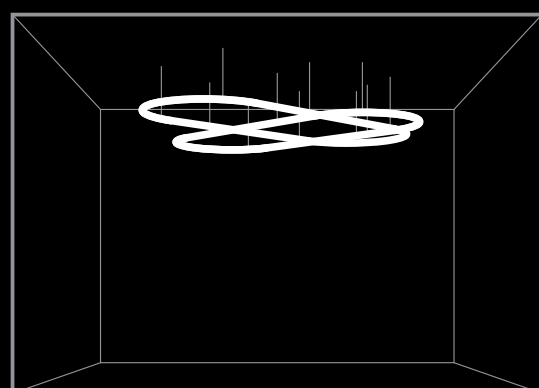
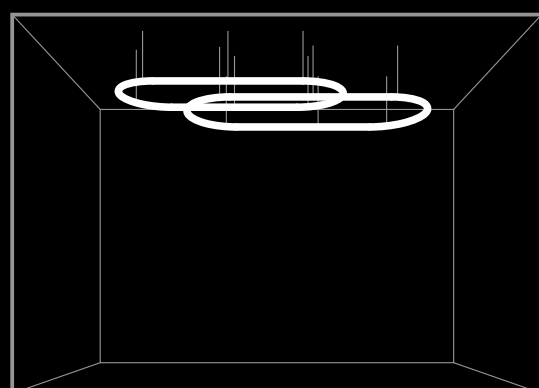




Geometry Applications

360 NEON · JNNR40

Application:	Geometry Application
Installation:	Hoisting
Profile Length:	L=7.57m
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m

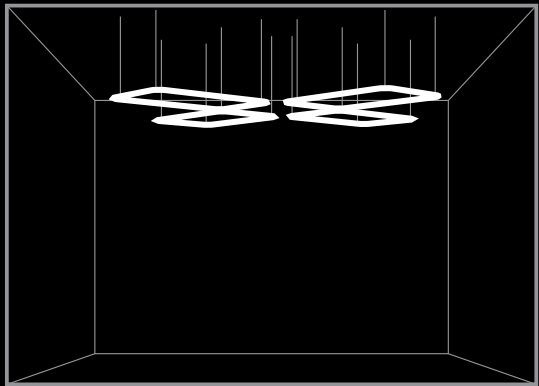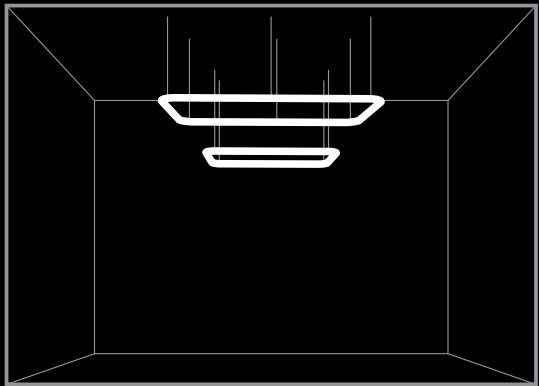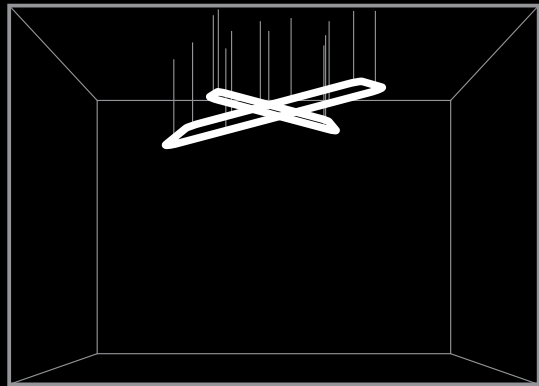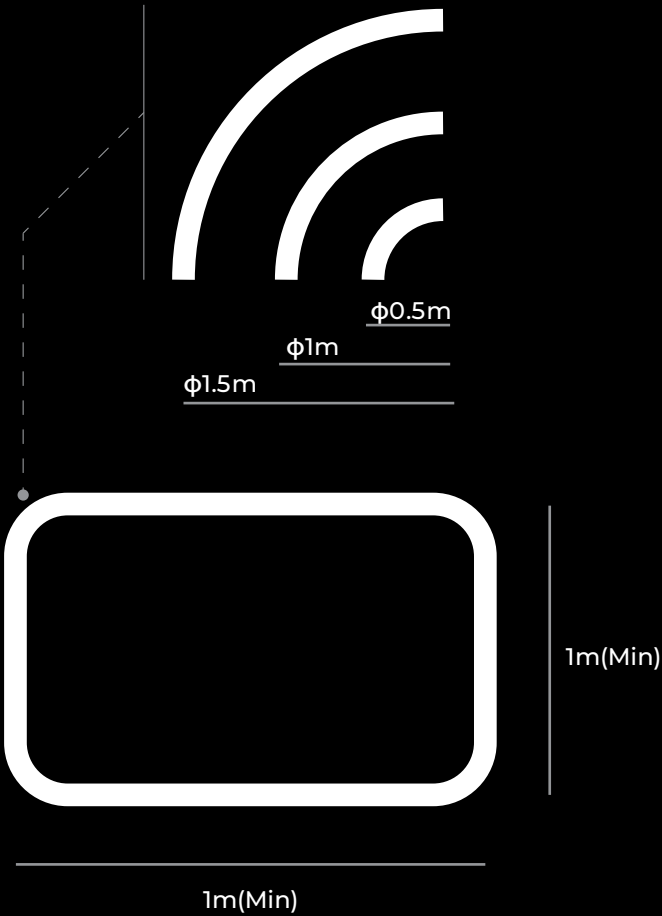

Profile & Neon: 3.57m(Min)






Geometry

Applications

360 NEON · JNNR40

Application:	Geometry Application
Installation:	Hoisting
Profile Length:	L=4.57m
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m

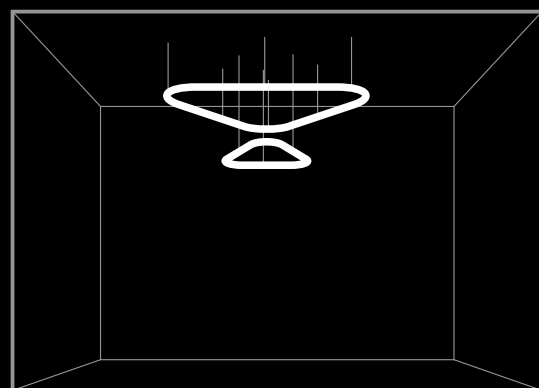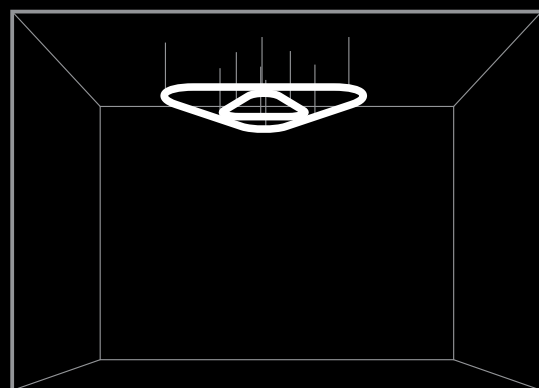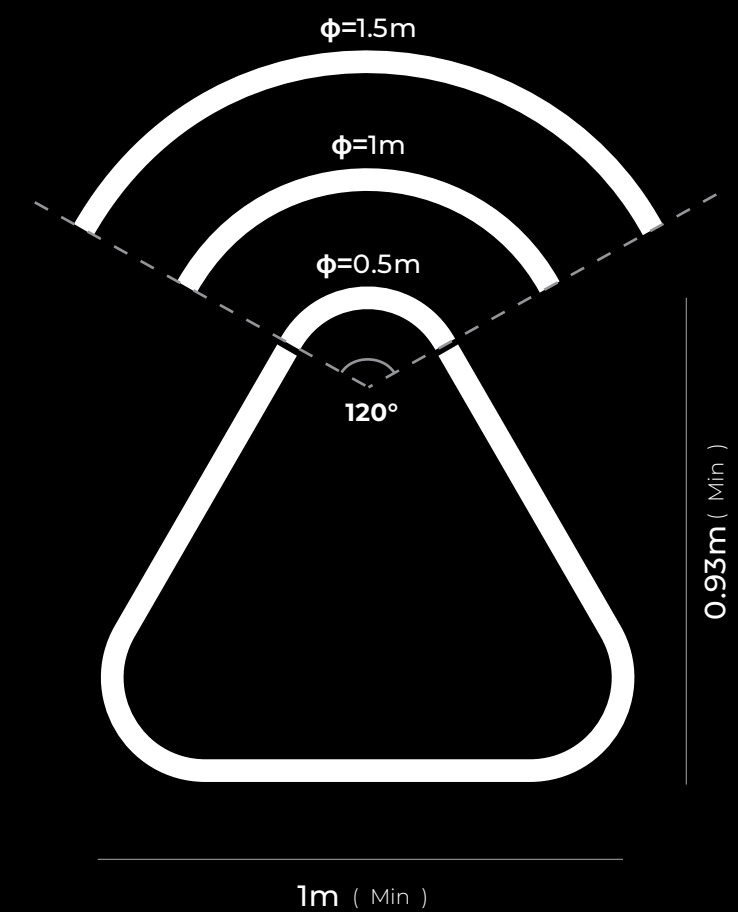

Profile & Neon: 3.07m(Min)




Geometry

Applications

360 NEON · JNNR40


Application:	Geometry Application
Installation:	Ceiling
Profile Length:	L=8.18m
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m

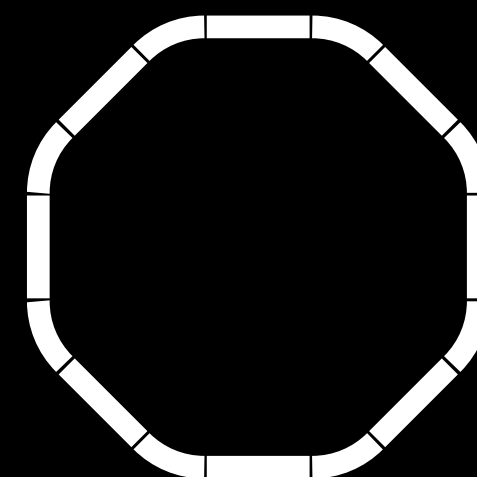

1.7m (Min)
(3.91m Max)

1.7m (Min)
(3.91m Max)

Profile & Neon: 5.57m(Min)

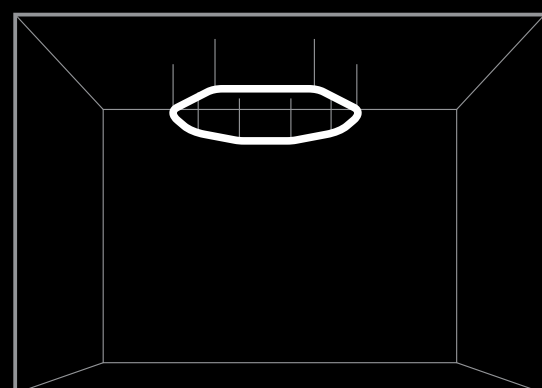




Geometry

Applications

360 NEON · JNNR40


Application:	Geometry Application
Installation:	Ceiling
Profile Length:	L=5.09m
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m

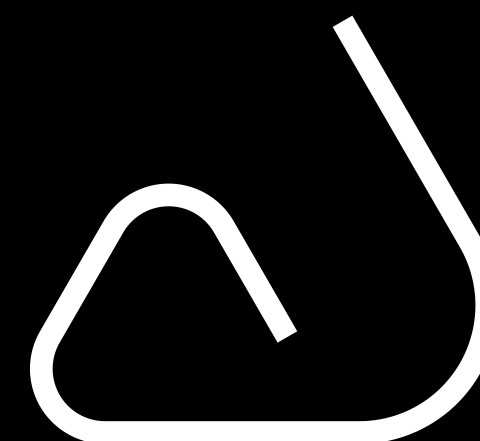

1.61m (Min)
(2.86m Max)

1.75m (Min)
(3.25m Max)

Profile & Neon: 5.09m(Min)
10.14m(Max)

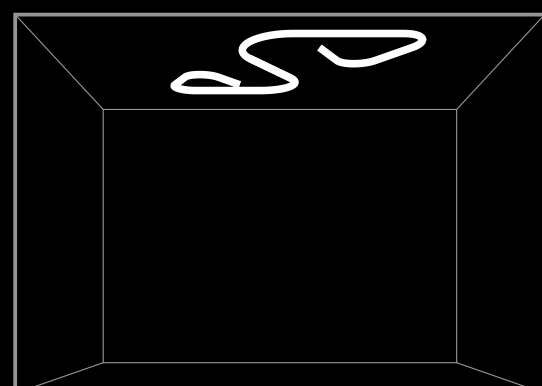




Word Applications

360 NEON · JNNR40

Application:	Word Application
Installation:	wall mounted
Profile Length:	"2"=3.96m
	"0"=4.11m
	"5"=4.35m
CCT:	4200K
Voltage:	24V
Power:	15 W/m
Luminous Flux:	1310 LM/m


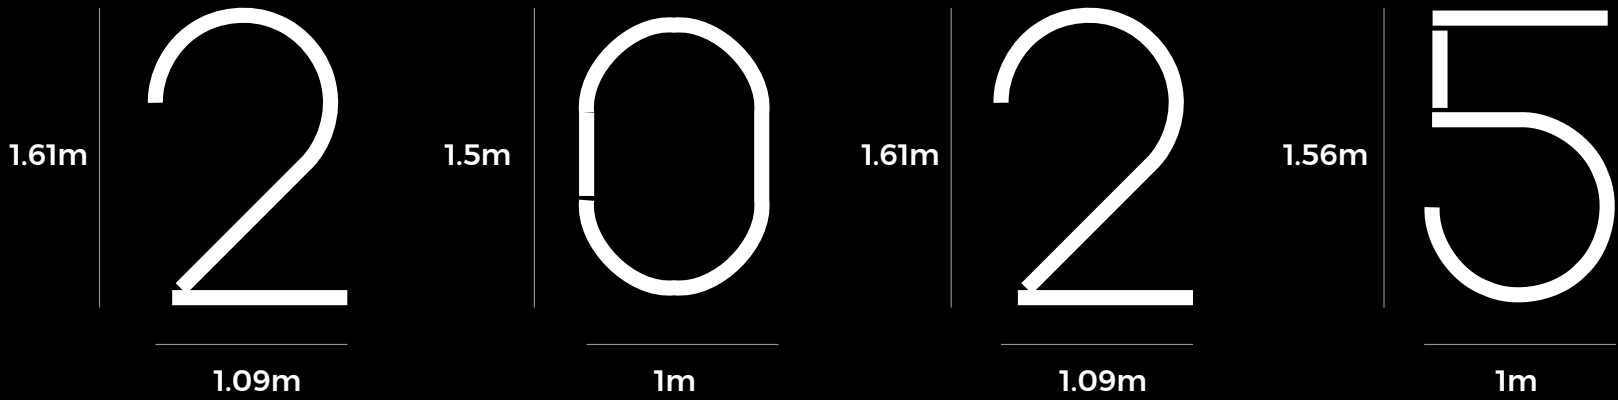




3D Applications

360 NEON · JNNR40

Application:	3D Application
Installation:	Hoisting
Profile Length:	L=7.28m
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m

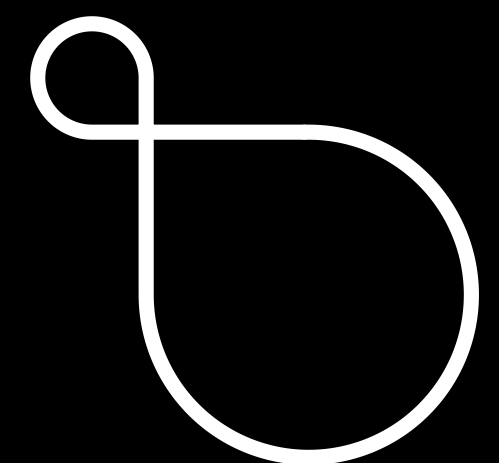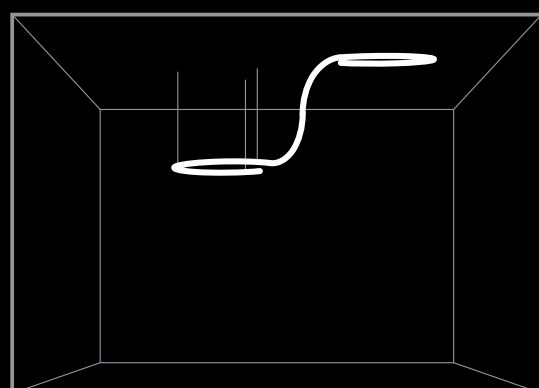

2m (Min)

2m (Min)

Profile & Neon : 7.28m(Min)


3D Applications

360 NEON · JNNR40

Application:	3D Application
Installation:	Hoisting & Ceiling
Profile Length:	L=19.1m(5m*4)
CCT:	4200K
Voltage:	24V
Power:	18 W/m
Luminous Flux:	2105 LM/m



1.5m

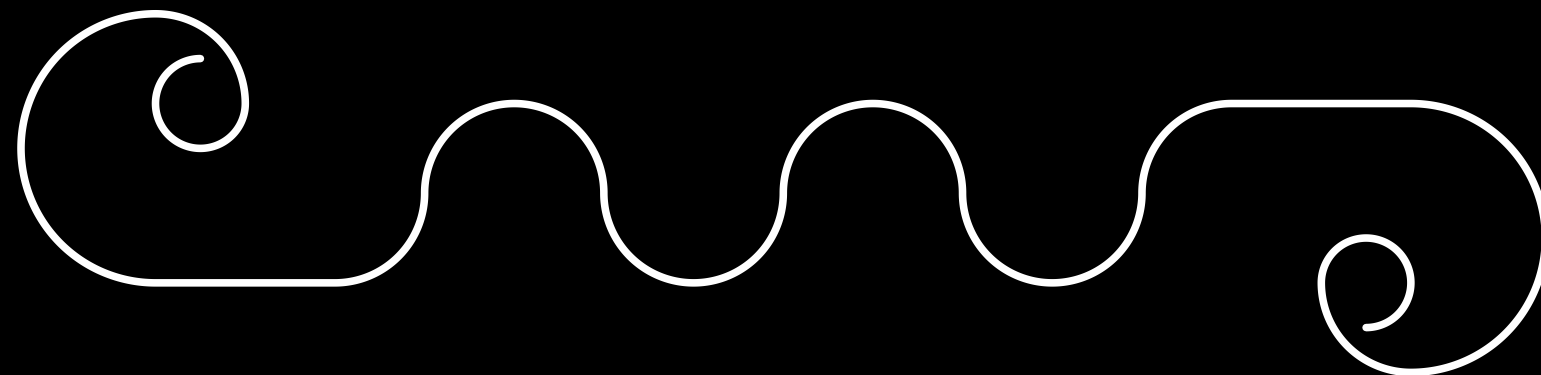

8.5m (Min)

1.5m