

JWA SERIES



WRAPAROUND LUMINAIRE

PRODUCT FEATURES

- Premium quality with post painted housing
- Excellent glare control with diffused lens
- 80 CRI standard / 90 CRI option available upon request
- 2700K and 3000K options available upon request
- Tunable white 2700K-6500K via Bluetooth controls available upon request
- High efficiency reliable driver supports 10 Yr warranty
- 0-10V Dim standard
- 120-277V input voltage
- Surface mount
- Linkable cable with quick connect available upon request
- 10 Yr Limited warranty

PRODUCT DIMENSIONS

	Dimensions	Weight	Pcs/Unit
2'	24.5" x 7.1" x 2.8"	4.45lbs	4
4'	47.7" x 7.1" x 2.8"	7.94lbs	

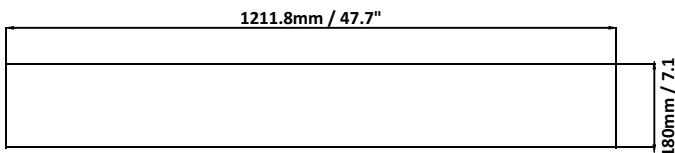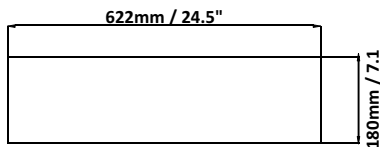

APPLICATIONS

- Retail
- Office
- Classroom
- Workshop
- Garage
- Hallway
- Staircase

PERFORMANCE SUMMARY

Input Power	40W
Input Voltage	120-277VAC
CCT	3500K / 4000K / 5000K
Lumen Output	5,372
Driver Efficacy	>90%
Dimming	0-10V Dimming
CRI	>80 Standard
Working Temperature	20°C - +50°C (68°F - + 122°F)
Certifications & Compliance	UL, FCC, CE, RoHS
Mounting	Surface Mounted
Lifetime Based on TM21	>139,000Hrs
Limited Warranty	10 Years

CERTIFICATIONS & COMPLIANCE



Miami, FL USA - info@jademar.com
 T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
 Values are nominal.
 Revised 06/2022

SPECIFICATION SUBMITTAL DETAIL

Project Name/Type:		Date:	
Catalog/Part #:			

JWA SERIES WRAPAROUND LUMINAIRE ORDERING INFORMATION / Example: JWA-4-40W-50K-D-WH

Product Series	Length	Wattage	CRI	CCT	Input Voltage	Controls & Dimming	Finish
JWA	2 (2 Ft)* *Special Order 4 (4 Ft) Standard	40W	Blank (80 CRI) Standard	35K (3500K) 40K (4000K) 50K (5000K)	Blank (120-277V)	D (0-10V Dimming) BMW0 (Bi-Level Microwave Occ. Sensor)	WH (White)

LUMEN PERFORMANCE & ELECTRICAL DATA

Model #	JWA-4-40W
Wattage	40W
Average Efficacy, lm/W	134
Average Lumens, lm	5,372
CCT Available	3500K, 4000K, 5000K
Driver Efficacy	>90%
Power Factor	>0.98
CRI	>80
Voltage	120-277V
Operating Temp	20°C - +50°C (68°F - + 122°F)
Mounting Options	Surface Mounting (Standard)
Certifications & Compliance	UL, FCC, CE, RoHS
Lifetime Based on TM21	L70 139,000Hrs
Warranty	10 Yrs

PHOTOMETRY

JWA-4-40W

