


JWA-CPS SERIES

CCT & POWER SELECTABLE WRAPAROUND LUMINAIRE

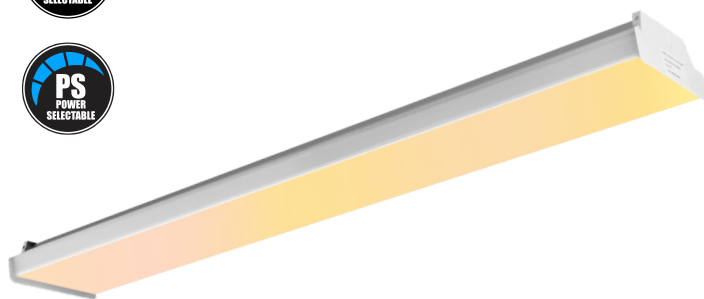



PRODUCT FEATURES

- CCT Selectable standard: 35K/40K/50K
- Power selectable standard: 30W/35W/40W
- 2700K and 3000K options available upon request
- Tunable white 2700K-6500K via Bluetooth controls available upon request
- Premium quality with post painted housing
- Excellent glare control with diffused lens
- 80 CRI standard / 90 CRI option available upon request
- High efficiency reliable driver supports 10 Yr warranty
- 0-10V Dim standard
- 120-277V Input voltage
- Surface mount
- Linkable cable with quick connect available upon request
- 10 Yr Limited warranty

CCT & POWER SELECTION

The JWA-CPS Luminaire can adjust the power and color temperature of the whole lamp, which is convenient and fast. The power and color temperature can be selected according to the actual needs of customers.

For example, if you want 35W power and 4000K color temperature, you need to shift the dial code switch to the middle position of the switch. JWA-CPS greatly meets the needs of customers.

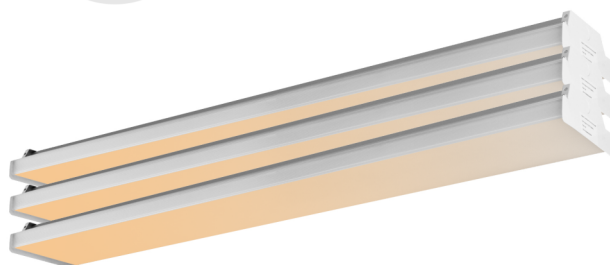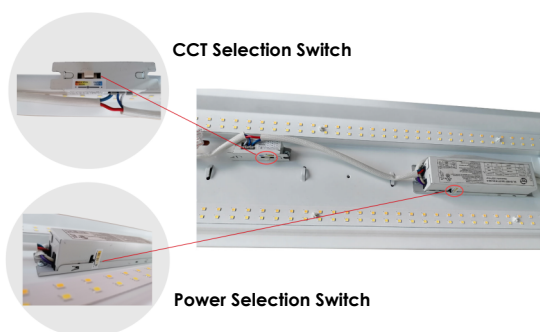


PERFORMANCE SUMMARY

Primary Input Power	40W (40W/35W/30W)
Efficacy, lm/W	134 lm/W on Average
CCT Selectable	3500K / 4000K / 5000K
CRI	>80 Standard
Input Voltage	120-277VAC
Dimming	0-10V Dimming
Working Temperature	20°C - +50°C (68°F - + 122°F)
Certifications & Compliance	UL, FCC, CE, RoHS
Lifetime Based on TM21	L70 139,000Hrs / L80 114,000Hrs / L90 102,000Hrs
Limited Warranty	10 Years

CERTIFICATIONS & COMPLIANCE




PRODUCT DIMENSIONS

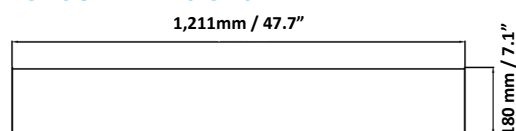

APPLICATIONS

- Retail
- Office
- Classroom
- Workshop
- Garage
- Hallway
- Staircase

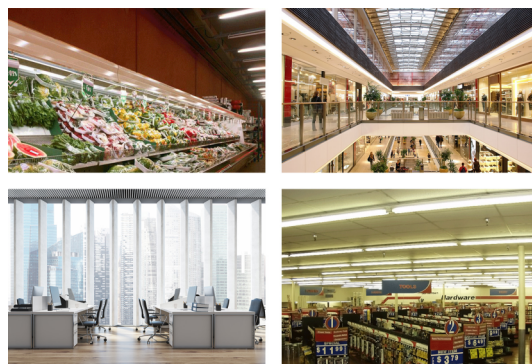



SPECIFICATION SUBMITTAL DETAIL

Project Name/Type:		Date:	
Catalog/Part #:			

JWA-CPS SERIES CCT & POWER SELECTABLE WRAPAROUND LUMINAIRE

ORDERING INFORMATION / Example: **JWA-CPS-4-40W-BMWO-EM8-WH-LINK6-ST/EN**

JWA-CPS	-	4	-		-	40W	-		-	
Product Series		Length		Input Voltage		Wattage		CRI		CCT
JWA-CPS		4 4 Ft (Standard)		Blank 120-277V		40W Power Selectable (40W/35W/30W)		Blank 80 CRI (Standard)		Blank CCT Selectable (3500K/4000K/5000K)


	-		-	WH	-	
Control Options		EM Pack Option		Finish		Other Options
BMWO	Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order	EM8 8W Emergency Battery Pack Internal EM15 15W Emergency Battery Pack Internal		WH White		LINK6-ST/EN 6FT One linkable with male/female quick connect LINK6-MD 6FT Middle with both end wire linkable with male/female quick connect
BMWO-DH	Factory setting for this sensor options is: 50% dim, 20 minutes delay then off. For different factory settings, description must be noted on the order (Daylight harvesting)					
SR-NLC-MWS	Silvair Microwave Sensor Integral Magnet Mount					
CB-NLC-MWS	Casambi Microwave Sensor Integral Magnet Mount					
BN-NLC-MWS	Bubblynet Microwave Sensor Integral Magnet Mount					
SR-NLC-FC	Silvair Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input					
CB-NLC-FC	Casambi Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input					
BN-NLC-FC	Bubblynet Fixture Controller, 12-24VDC, 0-10 Volt Dimming with sensor input					

LUMEN PERFORMANCE & ELECTRICAL DATA

Model #	JWA-CPS-40W		
Wattage	40W	35W	30W
Average Efficacy, lm/W	5,240	4,690	4,110
Average Lumens, lm	131	134	137
Driver Efficacy	>90%		
Power Factor	>0.98		
CRI	>80		
Voltage	120-277V		
Operating Temp	20°C - +50°C (68°F - +122°F)		
Mounting Options	Surface Mounting (Standard)		
Certifications & Compliance	UL, FCC, CE, RoHS		
Lifetime Based on TM21	L70 139,000Hrs / L80 114,000Hrs / L90 102,000Hrs		
Warranty	10 Yrs		

PHOTOMETRY

JWA-CPS-40W

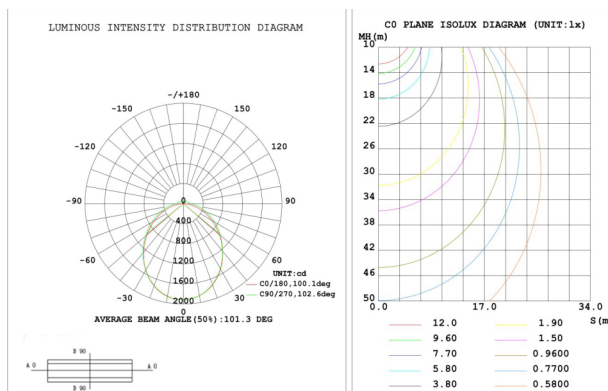

Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Values are nominal.
Revised 05/2025