

JWP-R SERIES

VANDAL/IMPACT RESISTANT ROTATING WALL PACK



PRODUCT DESCRIPTION

The Jademar JWP-R Series of rotating wall packs angle the light exactly where you need it, eliminating the guess work of which lighting fixture to buy. This fixture allows for the light to easily rotate and pushes it away from the wall, pulls the light downward, or finds the perfect balance of light distribution between the two.


The JWP-R Series has an efficacy of 135 lm/W, and is available in multiple color temperatures ranging from 3000K to 5000K.

The long lasting life and IP65 rating make this wall pack an excellent choice for multiple applications.

PRODUCT FEATURES

- Input Voltage Range: 100-277VAC
- Frequency: 50/60Hz
- Power Factor: >0.9
- Max THD: <15%
- Efficacy: 135 lm/W
- Color Rendering Index (CRI): >70
- Color Temperature (CCT): 3000K / 4000K / 5000K
- Lens Materials: Optical Polycarbonate with Glare Reduction
- Housing: Die Casting Aluminum
- Finish Colors: Black - Standard / Brown - Special Order
- IP Rating: IP65 Rated
- Certification: cULus Listed
- Lifetime based on TM21: L70 @ 167,000 Hrs. / L80 @ 142,000 Hrs. / L90 @ 116,000 Hrs.
- Warranty: 5 Years

DIMENSIONS

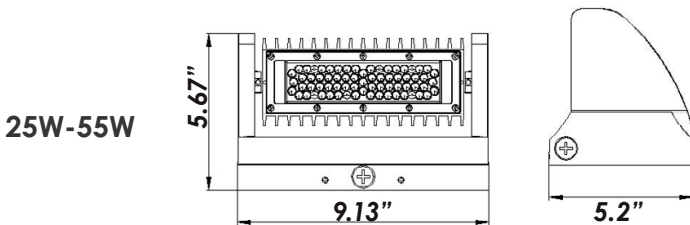

PERFORMANCE SUMMARY


Sizes	25W / 40W / 55W: 9.14" x 5.40 x 5.20" 60W / 80W / 120W: 9.14" x 8.86" x 5.20"
Input Power	25W / 40W / 55W / 60W / 80W / 120W
Efficacy	135 lm/W
CCT	3000K / 4000K / 5000K
Input Voltage	100-277VAC
Ingress Protection	IP65 Rated
CRI	>70
Lifetime Based on TM21	L70 @ 167,000 Hrs. / L80 @ 142,000 Hrs. / L90 @ 116,000 Hrs.
Limited Warranty	5 Years

CERTIFICATIONS & COMPLIANCE



APPLICATION


- Entrance and Courtyard Lighting
- Industrial and Outdoor Landscape Lighting
- Office Buildings and Hotels

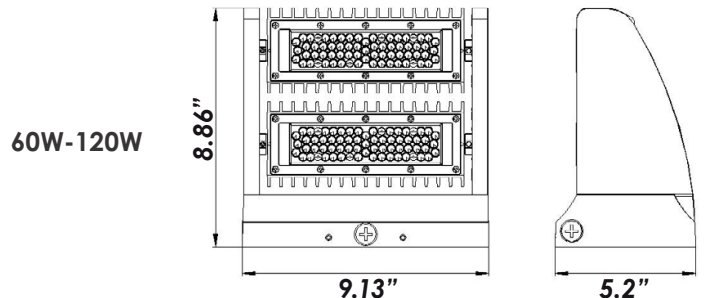

Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Values are nominal.
Revised 10/2022

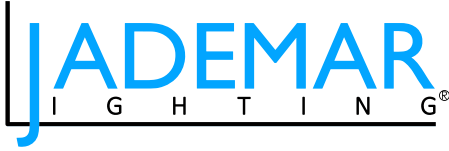

SPECIFICATION SUBMITTAL DETAIL

Project Name/Type:		Date:
Catalog/Part #:		

JWP-R VANDAL/IMPACT RESISTANT ROTATING WALL PACK SERIES

ORDERING INFORMATION / EXAMPLE: **JWP-R-25W-40K-BK**

Product Series	Wattage	Input Voltage	CCT	CRI	Finish
JWP-R	25W 40W 55W 60W 80W 120W	Blank (100-277VAC)	30K (3000K) 40K (4000K) 50K (5000K)	Blank (70 CRI) Standard	BK (Black) Standard BR (Brown) Special Order

FIELD INSTALLED OPTIONS

EM8	8W Emergency Battery Pack
EM15	15W Emergency Battery Pack
EM20	20W Emergency Battery Pack
PC	Photocell

ELECTRICAL AND PERFORMANCE DATA TABLE

Product Number	JWP-R-25W	JWP-R-40W	JWP-R-55W	JWP-R-60W	JWP-R-80W	JWP-R-120W
Maximum Dimensions	5.67" x 9.13" x 5.2"			8.86" x 9.13" x 5.2"		
Nominal Watts	24.27W	39.14W	55.50W	59.78W	79.18W	113.34W
Nominal Efficacy	135 lm/W					
Lumen Output (lm)	3400	5200	7200	8100	10800	15600
Input Voltage	100-277VAC 50/60Hz					
CRI	>70					
THD @ 120VAC	<20%					
Power Factor	>0.90					
Ingress Protection	IP65 Rated					
CCT	3000K / 4000K / 5000K					
Construction	Die Cast Aluminum Alloy (Black or Brown Finish)					
Beam Angle / Field Angle	60-Degree					
Lifetime based on TM21	L70 @ 167,000 Hrs. / L80 @ 142,000 Hrs. / L90 @ 116,000 Hrs.					
Ambient Working Temp	-20°C to +45°C (-4°F ~ +113°F)					
Certifications	cULus Rated					
Limited Warranty	5 Years					



Miami, FL USA - info@jademar.com
 T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
 Values are nominal.
 Revised 10/2022