

HOUSING APPEARANCE VARIES BY WATTAGE
SEE SPECIFICATION SECTIONS



PRL SERIES

DOB ROADWAY LIGHT

PRODUCT DESCRIPTION

The **PRL DOB Roadway Light** Series uses AC DOB (Driver-on-board) LED light technology, distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. The PRL Series is the better alternative for traditional street and area lighting with quick payback and improved performance.

CONSTRUCTION & MATERIALS

- Tool-less entry, Designed with 1-10V dimming capabilities
- Controls options available
- Die cast aluminum housing with two-bolt bracket mounts to (1.66" to 2.38" O.D.) diameter mast arm bracket available as an option
- Power Distribution Terminal Block Board can be used the wire of 6-16AWG
- Leveling adjustment from ± 5°
- Requires ANSI 3-wire, ANSI 5-wire or ANSI 7-wire Photocontrol Receptacle option
- Requires Less Photocontrol Receptacle, ANSI 3-wire, Photocontrol Receptacle, ANSI 5-wire Photocontrol, Receptacle or ANSI 7-wire, and Photocontrol Receptacle option
- Photocontrol (PE) requires 100-277 voltage or short cap option
- Features an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Gray, silver, black, bronze, platinum bronze, white and so on are available.

ELECTRICAL SYSTEM

- D.O.B. (Driver-on-Board Technology)
- Input Voltage: 100-277V or 347-480V, 50/60Hz
- Power Factor : > 0.99 at full load
- Total Harmonic Distortion: <20% at full load
- Integral 10kV surge suppression protection standard
- Luminaire is qualified to operate at ambient temperatures of -40°C to+50°C

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed. Suitable for wet locations
- Certified to ANSI C136.31-2001, 3G vibration standards
- 10kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2
- Meets FCC Part 15 standards for conducted and radiated emissions
- Luminaire and finish endurance tested to withstand 3,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- Dark Sky Friendly, IDA Approved. Please refer to www.darksky.org for most current information
- RoHS compliant - consult factory for additional details


WARRANTY

- 10 Years Warranty is standard on luminaire and components

PERFORMANCE SUMMARY

Input Power	50W / 100W / 120W / 150W / 180W / 200W / 240W
Efficacy	130 lm/W max
CCT Options	3000K / 4000K/ 5000K / 5700K
Construction	Die Cast Aluminum Housing with Powder Topcoat Finish and Molded Acrylic Lens
Input Voltage	100-277VAC or 347-480V
Ingress Protection	IP65
CRI	>70
Compliance	UL Listed
Surge Protection	10KV Standard
Lifetime Based On TM21	L70 @ 137,000 Hrs / L80 @118,000 Hrs / L90 @91,000 Hrs
Warranty	10 Years Limited

PRODUCT DIMENSIONS

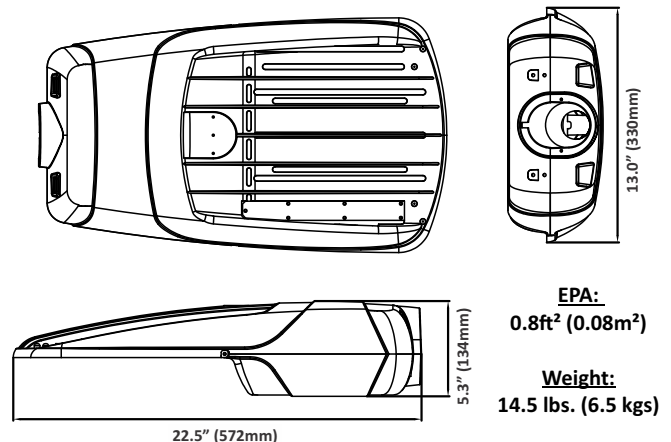

EPA:
0.8ft² (0.08m²)


Weight:
14.5 lbs. (6.5 kgs)



Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Values are nominal.
Revised 08/2022

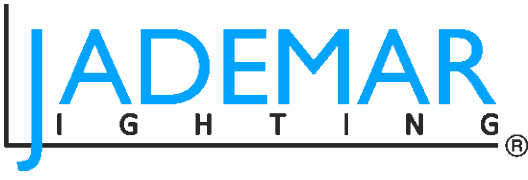

SPECIFICATION SUBMITTAL DETAIL

Project Name/Type:		Date:
Catalog/Part #:		

PRL DOB LED ROADWAY LIGHT SERIES

ORDERING INFORMATION / Example: **PRL-150W-40K-T3-PCR-3-GR**

Product Series	Wattage	Input Voltage	CCT	Light Distribution	CRI	Dimming	Controls	Housing Color
PRL	50W 100W 120W 150W 180W 200W 240W	Blank (100-277VAC) H (347-480VAC) *Only 180W & 240W	30K (3000K) 40K (4000K) 50K (5000K) 57K (5700K)	T2 (Type 2) T3 (Type 3) T4 (Type 4) T5 (Type 5)	Blank (70 CRI)	Blank (0-10V Dimming)	PCR-3 (3-Pin NEMA Receptacle & Shorting Cap) Standard PCR-5 (5-Pin NEMA Receptacle) PCR-7 (7-Pin NEMA Receptacle) PC3 (3-Pin Photocell) PC5 (5-Pin Photocell) IPC7 (7-Pin Photocell) BT (Bluetooth Fixture Controller)	GR (Gray Finish) Standard CC (Custom Color)* *Special Order - Replace the "CC" with RAL Color Code.

LUMEN PERFORMANCE AND ELECTRICAL DATA

Product Series	Light Distribution	100-277V			347-480V			PF	CCT	CRI	B	U	G	LED Current	Current					
		Lumens (lm)	Efficacy (lm/W)	THD%	Lumens (lm)	Efficacy (lm/W)	THD%								120V	240V	277V	347V	480V	
PRL-50W	TYPE 2	6195	124	15				0.99	3000	70	2	0	2	150mA	0.42	0.21	0.19			
		6000	126	15				0.99	4000	70	2	0	2	150mA	0.42	0.21	0.19			
		6000	120	15				0.99	5000	70	2	0	2	150mA	0.42	0.21	0.19			
		6000	120	15				0.99	5700	70	2	0	2	150mA	0.42	0.21	0.19			
	TYPE 3	6265	145	15				0.99	3000	70	1	0	1	150mA	0.42	0.21	0.19			
		6390	128	15				0.99	4000	70	1	0	1	150mA	0.42	0.21	0.19			
		6454	129	15				0.99	5000	70	1	0	1	150mA	0.42	0.21	0.19			
	TYPE 4	6518	130	15				0.99	5700	70	1	0	1	150mA	0.42	0.21	0.19			
		6391	128	15				0.99	3000	70	2	0	2	150mA	0.42	0.21	0.19			
		6519	130	15				0.99	4000	70	2	0	2	150mA	0.42	0.21	0.19			
		6584	132	15				0.99	5000	70	2	0	2	150mA	0.42	0.21	0.19			
	TYPE 5	6649	133	15				0.99	5700	70	2	0	2	150mA	0.42	0.21	0.19			
6391		128	15				0.99	3000	70	3	0	1	150mA	0.42	0.21	0.19				
6519		130	15				0.99	4000	70	3	0	1	150mA	0.42	0.21	0.19				
6584		132	15				0.99	5000	70	3	0	1	150mA	0.42	0.21	0.19				
PRL-100W	TYPE 2	6649	133	15				0.99	5700	70	3	0	1	150mA	0.42	0.21	0.19			
		11920	118	15				0.99	3000	70	3	0	3	150mA	0.84	0.42	0.37			
		12000	121	15				0.99	4000	70	3	0	3	150mA	0.84	0.42	0.37			
		12000	120	15				0.99	5000	70	3	0	3	150mA	0.84	0.42	0.37			
	TYPE 3	12000	120	15				0.99	5700	70	3	0	3	150mA	0.84	0.42	0.37			
		12055	121	15				0.99	3000	70	2	0	2	150mA	0.84	0.42	0.37			
		12296	123	15				0.99	4000	70	2	0	2	150mA	0.84	0.42	0.37			
	TYPE 4	12419	124	15				0.99	5000	70	2	0	2	150mA	0.84	0.42	0.37			
		12542	125	15				0.99	5700	70	2	0	2	150mA	0.84	0.42	0.37			
		12325	123	15				0.99	3000	70	2	0	2	150mA	0.84	0.42	0.37			
		12572	126	15				0.99	4000	70	2	0	2	150mA	0.84	0.42	0.37			
	TYPE 5	12697	127	15				0.99	5000	70	2	0	2	150mA	0.84	0.42	0.37			
12823		128	15				0.99	5700	70	2	0	2	150mA	0.84	0.42	0.37				
12297		123	15				0.99	3000	70	3	0	1	150mA	0.84	0.42	0.37				
12543		125	15				0.99	4000	70	3	0	1	150mA	0.84	0.42	0.37				
TYPE 5	12668	127	15				0.99	5000	70	3	0	1	150mA	0.84	0.42	0.37				
	12794	128	15				0.99	5700	70	3	0	1	150mA	0.84	0.42	0.37				

Lumen Ambient Temp.		Lumen Multiplier	Operating Hours				
0°C	32°F	1.02	0	25,000	50,000	75,000	100,000
10°C	50°F	1.01	50W (150mA)				
20°C	68°F	1.00	100%	96%	92%	88%	84%
25°C	77°F	1.00	100W (150mA)				
30°C	86°F	1.00	100%	95%	91%	86%	82%
40°C	104°F	0.99	Lumen Maintenance Factor				



Miami, FL USA - info@jademar.com
T: 305.640.0465 - F: 305.640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Values are nominal.
Revised 08/2022

SPECIFICATION SUBMITTAL DETAIL


Project Name/Type:		Date:	
Catalog/Part #:			

PRL DOB LED ROADWAY LIGHT SERIES LUMEN PERFORMANCE AND ELECTRICAL DATA

Product Series	Light Distribution	Lumens (lm)	Efficacy (lm/W)	THD%	Lumens (lm)	Efficacy (lm/W)	THD%	PF	CCT	CRI	B	U	G	LED Current	Current				
		100-277V			347-480V										120V	240V	277V	347V	480V
PRL-120W	TYPE 2	14220	118	15				0.99	3000	70	3	0	3	150mA	1.00	0.50	0.44		
		15443	129	15				0.99	4000	70	3	0	3	150mA	1.00	0.50	0.44		
		15659	141	15				0.99	5000	70	3	0	3	150mA	1.00	0.50	0.44		
		15816	142	15				0.99	5700	70	3	0	3	150mA	1.00	0.50	0.44		
	TYPE 3	14371	120	15				0.99	3000	70	2	0	2	150mA	1.00	0.50	0.44		
		15607	130	15				0.99	4000	70	2	0	2	150mA	1.00	0.50	0.44		
		15826	142	15				0.99	5000	70	2	0	2	150mA	1.00	0.50	0.44		
		15984	144	15				0.99	5700	70	2	0	2	150mA	1.00	0.50	0.44		
	TYPE 4	15108	126	15				0.99	3000	70	2	0	2	150mA	1.00	0.50	0.44		
		16407	137	15				0.99	4000	70	2	0	2	150mA	1.00	0.50	0.44		
		16637	136	15				0.99	5000	70	2	0	2	150mA	1.00	0.50	0.44		
		16803	137	15				0.99	5700	70	2	0	2	150mA	1.00	0.50	0.44		
	TYPE 5	16191	135	15				0.99	3000	70	4	0	2	150mA	1.00	0.50	0.44		
		17584	147	15				0.99	4000	70	4	0	2	150mA	1.00	0.50	0.44		
		17830	144	15				0.99	5000	70	4	0	2	150mA	1.00	0.50	0.44		
		18008	146	15				0.99	5700	70	4	0	2	150mA	1.00	0.50	0.44		
PRL-150W	TYPE 2	18286	122	15				0.99	3000	70	3	0	3	150mA	1.67	0.84	0.73		
		17680	118	15				0.90	4000	70	3	0	3	150mA	1.67	0.84	0.73		
		18360	122	15				0.90	5000	70	3	0	3	150mA	1.67	0.84	0.73		
		18600	124	15				0.90	5700	70	3	0	3	150mA	1.67	0.84	0.73		
	TYPE 3	18481	123	15				0.99	3000	70	2	0	2	150mA	1.67	0.84	0.73		
		18850	126	15				0.90	4000	70	2	0	2	150mA	1.67	0.84	0.73		
		19039	127	15				0.90	5000	70	2	0	2	150mA	1.67	0.84	0.73		
		19227	128	15				0.90	5700	70	2	0	2	150mA	1.67	0.84	0.73		
	TYPE 4	18896	126	15				0.99	3000	70	2	0	2	150mA	1.67	0.84	0.73		
		19274	128	15				0.90	4000	70	2	0	2	150mA	1.67	0.84	0.73		
		19466	130	15				0.90	5000	70	2	0	2	150mA	1.67	0.84	0.73		
		19659	131	15				0.90	5700	70	2	0	2	150mA	1.67	0.84	0.73		
	TYPE 5	18852	126	15				0.99	3000	70	4	0	2	150mA	1.67	0.84	0.73		
		19229	128	15				0.90	4000	70	4	0	2	150mA	1.67	0.84	0.73		
		19421	129	15				0.90	5000	70	4	0	2	150mA	1.67	0.84	0.73		
		19614	131	15				0.90	5700	70	4	0	2	150mA	1.67	0.84	0.73		
PRL-180W	TYPE 2	17,081	100	9				0.99	2975	71	3	0	3	1.0A	1.5	0.79	0.71		
		18,542	103	20	18,991	106	20	0.90	4000	70	3	0	3	1.0A	1.5	0.79	0.71	0.53	0.41
		19,172	107	20	19,718	110	20	0.90	5000	68	3	0	3	1.0A	1.5	0.79	0.71	0.53	0.41
		19,801	110	20	20,445	114	20	0.90	5700	65	3	0	3	1.0A	1.5	0.79	0.71	0.53	0.41
	TYPE 3	17,058	100	9				0.99	2983	71	3	0	3	1.0A	1.5	0.79	0.71		
		17,989	100	20	18,991	106	20	0.90	4000	70	3	0	3	1.0A	1.5	0.79	0.71	0.53	0.41
		18,605	103	20	19,262	107	20	0.90	5000	68	3	0	3	1.0A	1.5	0.79	0.71	0.53	0.41
		19,220	107	20	19,932	111	20	0.90	5700	65	3	0	3	1.0A	1.5	0.79	0.71	0.53	0.41
	TYPE 4	17,219	101	9				0.99	3102	72	3	0	3	1.0A	1.5	0.79	0.71		
		17,764	102	20				0.90	4000	70	3	0	3	1.0A	1.5	0.79	0.71		
		18,314	107	20				0.90	5000	70	3	0	3	1.0A	1.5	0.79	0.71		
		18,687	109	20				0.90	5700	70	3	0	3	1.0A	1.5	0.79	0.71		
	TYPE 5	17,385	102	9				0.99	2977	71	4	0	1	1.0A	1.5	0.79	0.71		
		18,492	103	20	18,895	110	16	0.90	4000	70	4	0	1	1.0A	1.5	0.79	0.71	0.53	0.41
		19,219	107	20	19,627	109	20	0.90	5000	68	4	0	1	1.0A	1.5	0.79	0.71	0.53	0.41
		19,946	111	20	20,360	119	16	0.90	5700	65	4	0	1	1.0A	1.5	0.79	0.71	0.53	0.41

Lumen Ambient Temp.	Lumen Multiplier	Operating Hours					
		0	25,000	50,000	75,000	100,000	
120W (100mA)							
0°C	32°F	1.02	100%	96%	92%	88%	84%
150W (120mA)							
10°C	50°F	1.01	100%	95%	91%	87%	83%
180W (100mA)							
20°C	68°F	1.00	100%	92%	85%	80%	75%
25°C	77°F	1.00					
30°C	86°F	1.00					
40°C	104°F	0.99					



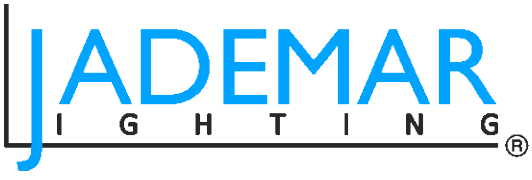

SPECIFICATION SUBMITTAL DETAIL

Project Name/Type:		Date:	
Catalog/Part #:			

PRL DOB LED ROADWAY LIGHT SERIES ELECTRICAL AND PERFORMANCE DATA

Product Series	Light Distribution	100-277V			347-480V			PF	CCT	CRI	B	U	G	LED		Current				
		Lumens (lm)	Efficacy (lm/W)	THD%	Lumens (lm)	Efficacy (lm/W)	THD%							Current	120V	240V	277V	347V	480V	
PRL-200W	Type 2	20,330	120	15				0.99	3000	70	4	0	4	1.0A	0.85	0.44	0.4			
		22,081	118	15				0.99	4000	70	4	0	4	1.0A	0.85	0.44	0.4			
		22,390	119	15				0.99	5000	70	4	0	4	1.0A	0.85	0.44	0.4			
	Type 3	22,611	122	15				0.99	5700	70	4	0	4	1.0A	0.85	0.44	0.4			
		20,546	121	15				0.99	3000	70	3	0	3	1.0A	0.85	0.44	0.4			
		22,316	124	15				0.99	4000	70	3	0	3	1.0A	0.85	0.44	0.4			
	Type 4	22,628	125	15				0.99	5000	70	3	0	3	1.0A	0.85	0.44	0.4			
		22,852	126	15				0.99	5700	70	3	0	3	1.0A	0.85	0.44	0.4			
		21,007	124	15				0.99	3000	70	3	0	3	1.0A	0.85	0.44	0.4			
	Type 5	22,817	126	15				0.99	4000	70	3	0	3	1.0A	0.85	0.44	0.4			
		23,136	128	15				0.99	5000	70	3	0	3	1.0A	0.85	0.44	0.4			
		23,364	129	15				0.99	5700	70	3	0	3	1.0A	0.85	0.44	0.4			
	PRL-240W	TYPE 2	20,959	124	15				0.99	3000	70	4	0	2	1.0A	0.85	0.44	0.4		
			22,764	126	15				0.99	4000	70	4	0	2	1.0A	0.85	0.44	0.4		
			23,083	127	15				0.99	5000	70	4	0	2	1.0A	0.85	0.44	0.4		
23,310			129	15				0.99	5700	70	4	0	2	1.0A	0.85	0.44	0.4			
TYPE 3		21,717	101	6				0.99	2974	71	3	0	3	1.0A	2.0	1.05	0.94			
		24,376	135	20	25,357	106	20	0.90	4000	70	3	0	3	1.0A	2.0	1.05	0.94	0.71	0.55	
		25,375	141	20	26,198	109	20	0.90	5000	68	3	0	3	1.0A	2.0	1.05	0.94	0.71	0.55	
		26,375	147	20	27,038	113	20	0.90	5700	65	3	0	3	1.0A	2.0	1.05	0.94	0.71	0.55	
TYPE 4		21,742	98	6				0.99	2981	71	3	0	3	1.0A	2.0	1.05	0.94			
		24,837	138	20	25,366	106	20	0.90	4000	70	3	0	3	1.0A	2.0	1.05	0.94	0.71	0.55	
		25,375	141	20	25,938	108	20	0.90	5000	68	3	0	3	1.0A	2.0	1.05	0.94	0.71	0.55	
		25,914	144	20	26,510	110	20	0.90	5700	65	3	0	3	1.0A	2.0	1.05	0.94	0.71	0.55	
TYPE 5		21,570	99	6	21,570	99	6	0.99	3100	72	3	0	3	1.0A	2.0	1.05	0.94			
		22,006	100	20	22,006	100	20	0.90	4000	70	3	0	3	1.0A	2.0	1.05	0.94			
		22,686	104	20	22,686	104	20	0.90	5000	70	3	0	3	1.0A	2.0	1.05	0.94			
	23,409	107	20	23,409	107	20	0.90	5700	70	3	0	3	1.0A	2.0	1.05	0.94				
TYPE 5	22,261	102	6				0.99	2974	71	4	0	3	1.0A	2.0	1.05	0.94				
	24,473	136	20	25,006	105	8	0.90	4000	70	4	0	3	1.0A	2.0	1.05	0.94	0.71	0.55		
	25,639	142	20	26,222	109	20	0.90	5000	68	4	0	3	1.0A	2.0	1.05	0.94	0.71	0.55		
	26,806	149	20	27,437	114	20	0.90	5700	65	4	0	3	1.0A	2.0	1.05	0.94	0.71	0.55		


Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of enduser environment and application. Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%. Contact factory for performance data on any configurations not shown here.

Lumen Ambient Temp.		Lumen Multiplier	Operating Hours				
0°C	32°F	1.02	0	25,000	50,000	75,000	100,000
10°C	50°F	1.01	200W (150mA)				
20°C	68°F	1.00	100%	95%	90%	86%	81%
25°C	77°F	1.00	240W (150mA)				
30°C	86°F	1.00	100%	91%	85%	79%	73%
40°C	104°F	0.99	Lumen Maintenance Factor				



JADEMAR PRL SERIES DOB LED ROADWAY LIGHT


PHOTOMETRIC DATA

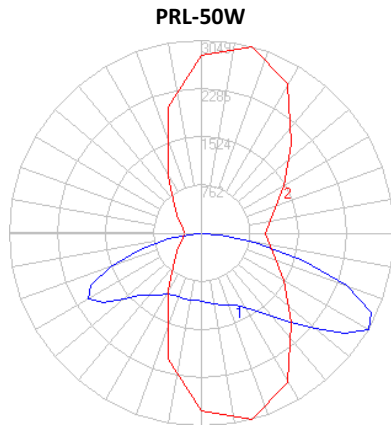

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	538.3	8.8	8.8
FM (30-60)	2116.3	34.5	34.5
FH (60-80)	1185.7	19.3	19.3
FVH (80-90)	79.0	1.3	1.3
BL (0-30)	407.4	6.6	6.6
BM (30-60)	1110.3	18.1	18.1
BH (60-80)	656.5	10.7	10.7
BVH (80-90)	40.8	0.7	0.7
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	6134.3	100.0	100.0


BUG Rating B2-U0-G2

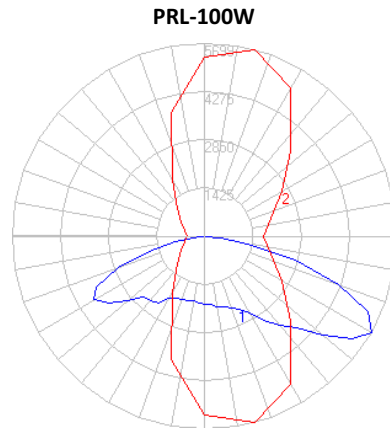

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1016.1	9.0	9.0
FM (30-60)	4028.1	35.5	35.5
FH (60-80)	2044.9	18.0	18.0
FVH (80-90)	130.2	1.1	1.1
BL (0-30)	768.4	6.8	6.8
BM (30-60)	2103.8	18.5	18.5
BH (60-80)	1189.2	10.5	10.5
BVH (80-90)	67.8	0.6	0.6
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	11348.5	100.0	100.0


BUG Rating B3-U0-G3

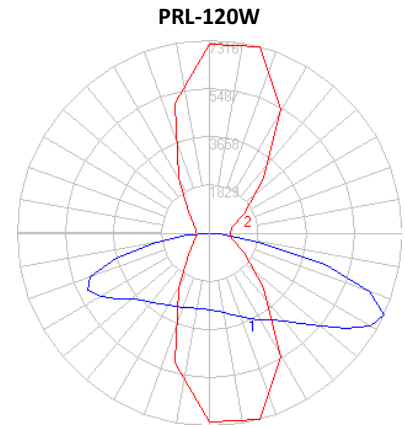

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1461.3	9.5	9.5
FM (30-60)	5191.4	33.6	33.6
FH (60-80)	2653.3	17.2	17.2
FVH (80-90)	164.6	1.1	1.1
BL (0-30)	1100.7	7.1	7.1
BM (30-60)	2877.9	18.6	18.6
BH (60-80)	1834.1	11.9	11.9
BVH (80-90)	159.6	1.0	1.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	15442.9	100.0	100.0

BUG Rating B3-U0-G3

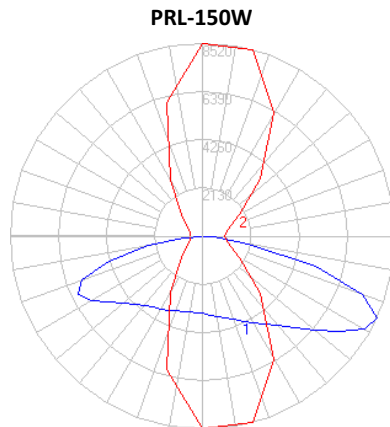

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1714.5	9.5	9.5
FM (30-60)	6110.8	33.8	33.8
FH (60-80)	3137.2	17.3	17.3
FVH (80-90)	199.2	1.1	1.1
BL (0-30)	1287.4	7.1	7.1
BM (30-60)	3354.4	18.5	18.5
BH (60-80)	2126.0	11.7	11.7
BVH (80-90)	176.1	1.0	1.0
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	18105.6	100.0	100.0




BUG Rating B3-U0-G3



JADEMAR PRL SERIES DOB LED ROADWAY LIGHT

I G H T I N G

PHOTOMETRIC DATA

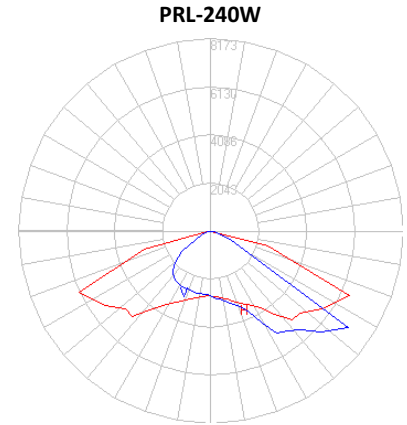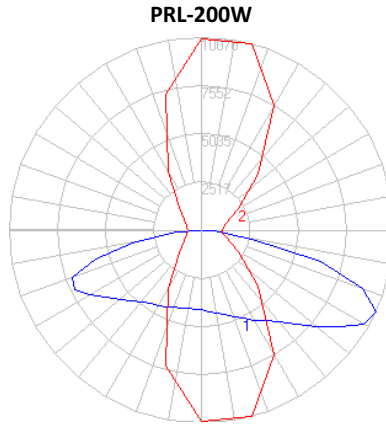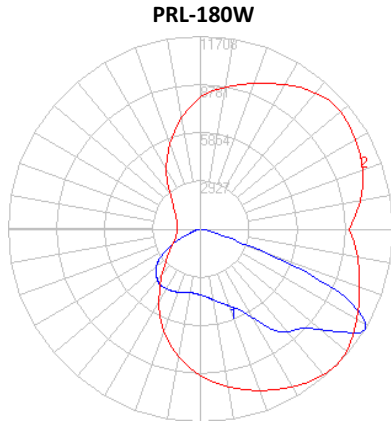

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	2088.6	8.2	8.2
FM (30-60)	9839.1	38.8	38.8
FH (60-80)	4679.1	18.4	18.4
FVH (80-90)	74.3	0.3	0.3
BL (0-30)	1759.8	6.9	6.9
BM (30-60)	4974.4	19.6	19.6
BH (60-80)	1884.5	7.4	7.4
BVH (80-90)	65.9	0.3	0.3
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	25365.7	99.9	100.0

BUG Rating B3-U0-G3

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	2099.5	9.5	9.5
FM (30-60)	7380.4	33.4	33.4
FH (60-80)	3724.9	16.9	16.9
FVH (80-90)	240.4	1.1	1.1
BL (0-30)	1570.2	7.1	7.1
BM (30-60)	4095.7	18.5	18.5
BH (60-80)	2709.0	12.3	12.3
BVH (80-90)	261.3	1.2	1.2
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	22081.4	100.0	100.0

BUG Rating B4-U0-G4

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	2088.6	8.2	8.2
FM (30-60)	9839.1	38.8	38.8
FH (60-80)	4679.1	18.4	18.4
FVH (80-90)	74.3	0.3	0.3
BL (0-30)	1759.8	6.9	6.9
BM (30-60)	4974.4	19.6	19.6
BH (60-80)	1884.5	7.4	7.4
BVH (80-90)	65.9	0.3	0.3
UL (90-100)	0.0	0.0	0.0
UH (100-180)	0.0	0.0	0.0
Total	25365.7	99.9	100.0

BUG Rating B3-U0-G3

