

SPECIFICATION SUBMITTAL DETAIL

PROJECT NAME:	
MODEL NUMBER:	
DATE:	

JESC-RUN-LG SERIES

RUNNING MAN EXIT SIGN

WITH LIGHT GUIDE

ILLUMINATION

- Ultra bright, energy efficient white LED emergency lighting.
- 4.5W (36 LEDs x 0.125 watts) per light pipe.
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "light pipe" lens for optimal light distribution.
- Ultra bright, energy efficient, long lasting white LED provides even, fully illuminated panel.

ELECTRICAL

- Dual 120/347 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board/light pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Right, Left and No Arrow) pictogram legends.

HOUSING


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes.



WARRANTY AND LISTINGS

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C – 50°C).
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for Emergency lighting equipment.

PRODUCT DIMENSIONS

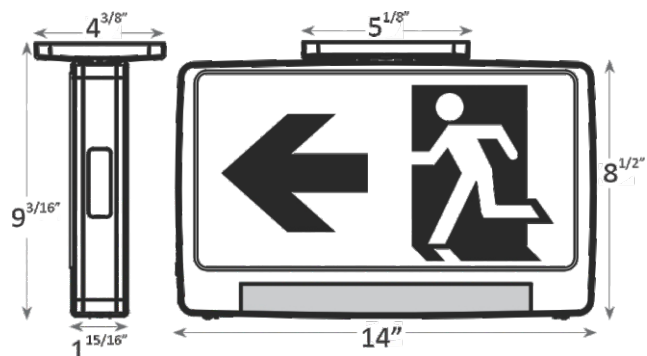


ORDERING INFORMATION

Example: **JESC-RUN-LG-SF-WH-RC**

Product Series	No. of Faces		Housing Color Options		Options	
JESC-RUN-LG	SF	Single Face	WH	White	RC	Remote Capacity
	DF	Double Face	BK	Black	HL	High Lumen
					SDT	Self-Diagnostics



Quotations: quotes@jademar.com
To place an order: orders@jademar.com
Tel: (305) 640.0465 | Fax: (305) 640.0468
WWW.JADEMAR.COM



Information contained herein is subject to change without notice.
Revised 07/2023